


EDGLINE SCREWLOC FLATPAX KITCHEN RANGE

ASSEMBLY GUIDE

BASE CABINET 300mm

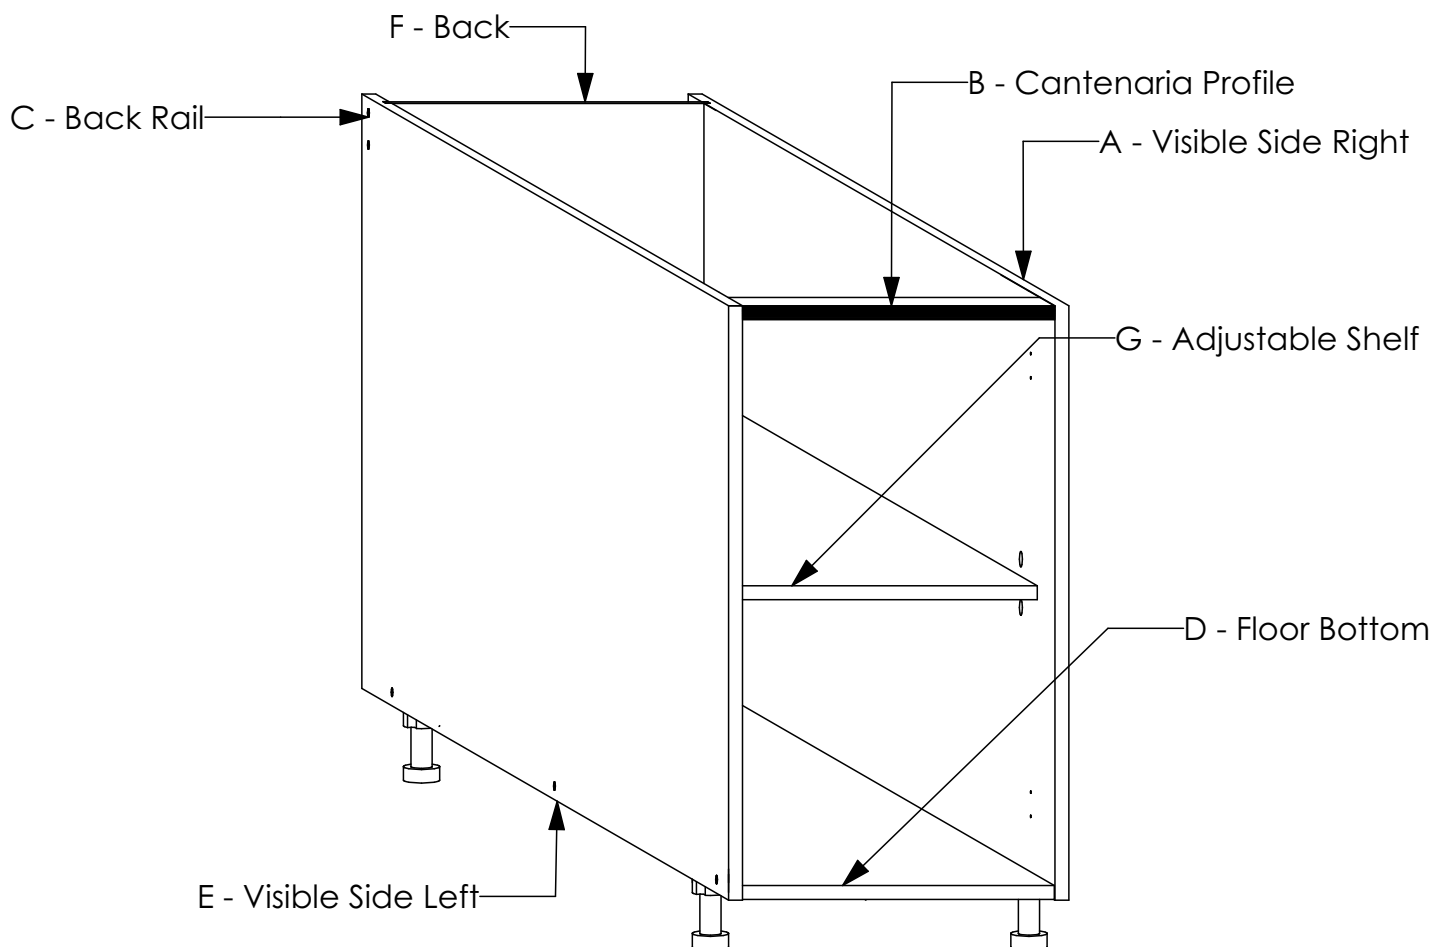

HARDWARE

TOTAL NUMBER OF PANELS: 6

PRODUCT	QTY	IMAGE
Screw 4.0 x 50mm	10	
Screw 3.5 x 16mm	26	
Plinth Leg With Base H100mm Kit	4	
Shelf Studs	4	
Cantenaria-profile_Silver	1	
Clip and fix plate for cantenaria	2	


GENERAL INSTRUCTIONS

1. Confirm that all panels (6) are in the package before assembling.
2. Check the white sticker on each panel for the labelling (A, B, C, D, E, F & G).
3. Ensure that the panels are laid on a non-abrasive surface when assembling.
4. Countersink the holes on the side panels before inserting the screws.
5. Ensure that the screw is perpendicular to the surface being drilled for a clean and strong joint.


TOOLS REQUIRED



Screw Driver
(Pozidriv Head)

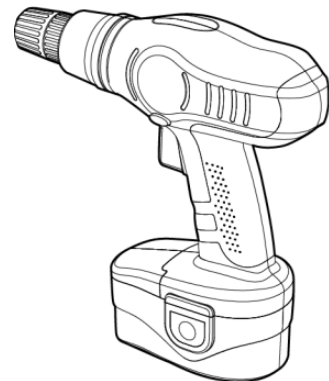


Cordless Drill

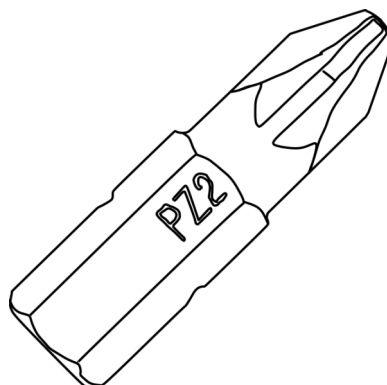


Pozi Bit (PZ2)

STEP 1

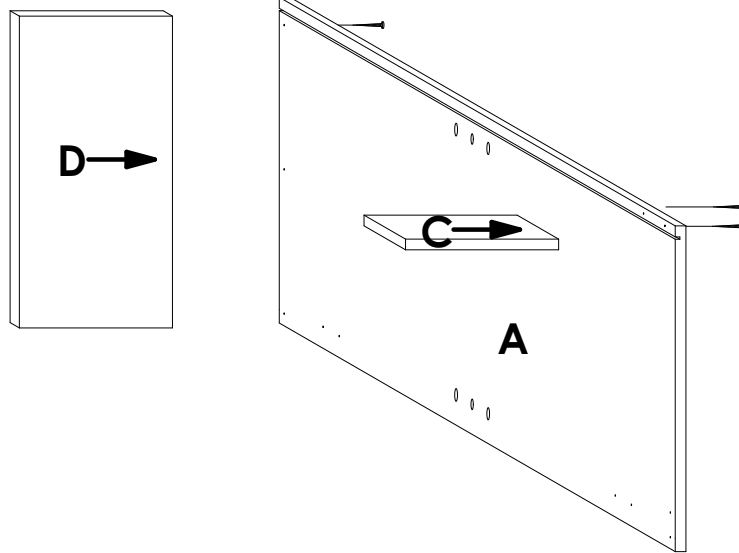


Connect panels **C & D** to panel **A** using **Screw 4.0 X 50mm** in the pre-drilled pilot holes as shown. Refer to **Det 1 - 3** below before fastening the screws.

STEP 2

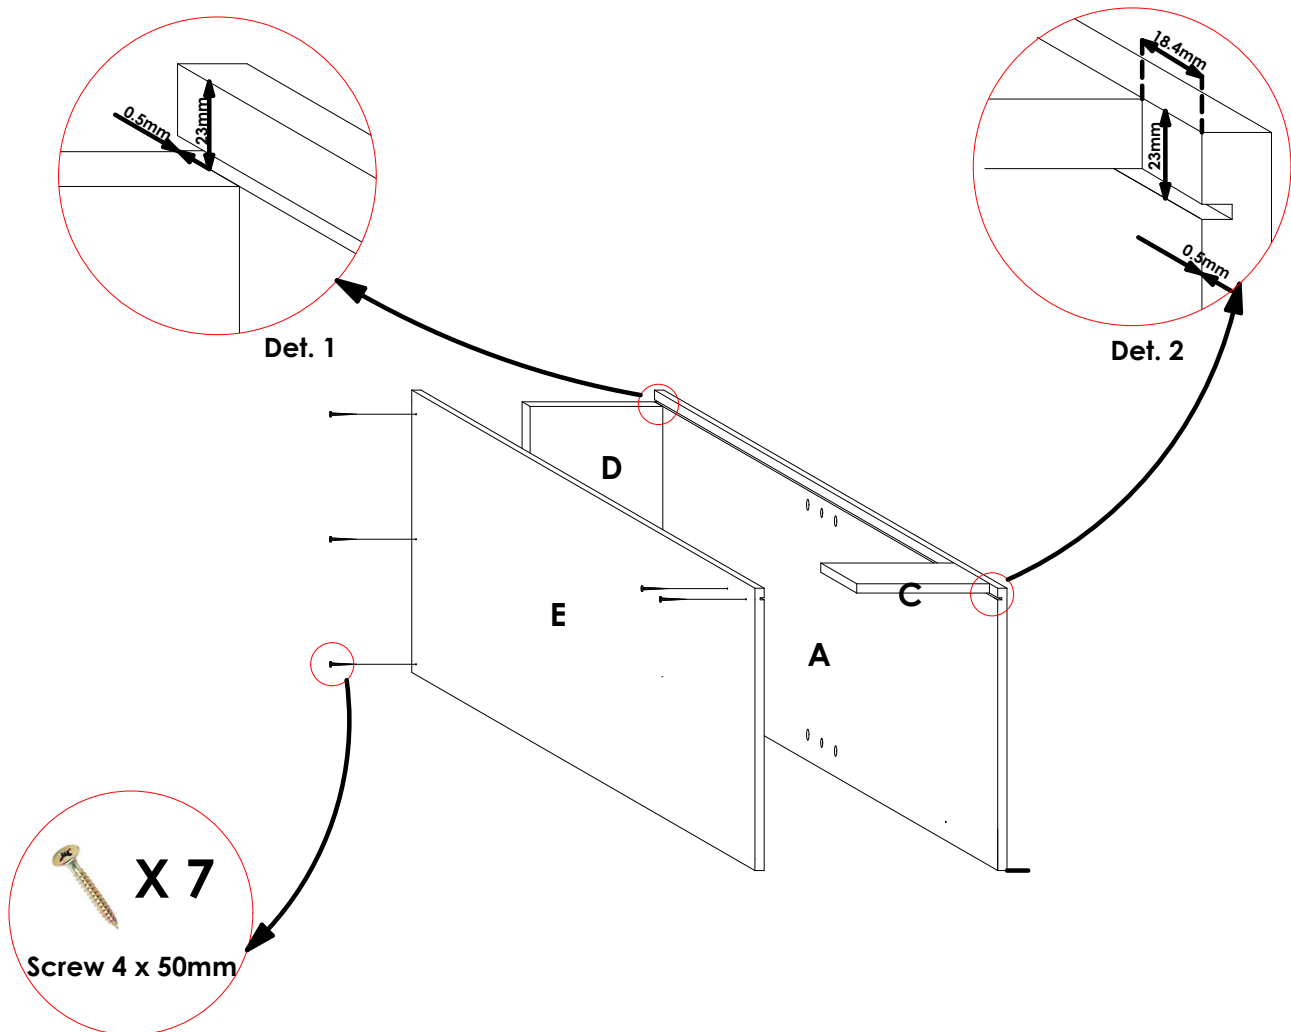


Connect panel **E** to panels **C & D** using **Screw 4.0 X 50mm** in the pre-drilled pilot holes as shown. Ensure that the **symmetry** between panel **E** and panel **A** is maintained. Refer to **Det 1 - 3**.

STEP 3

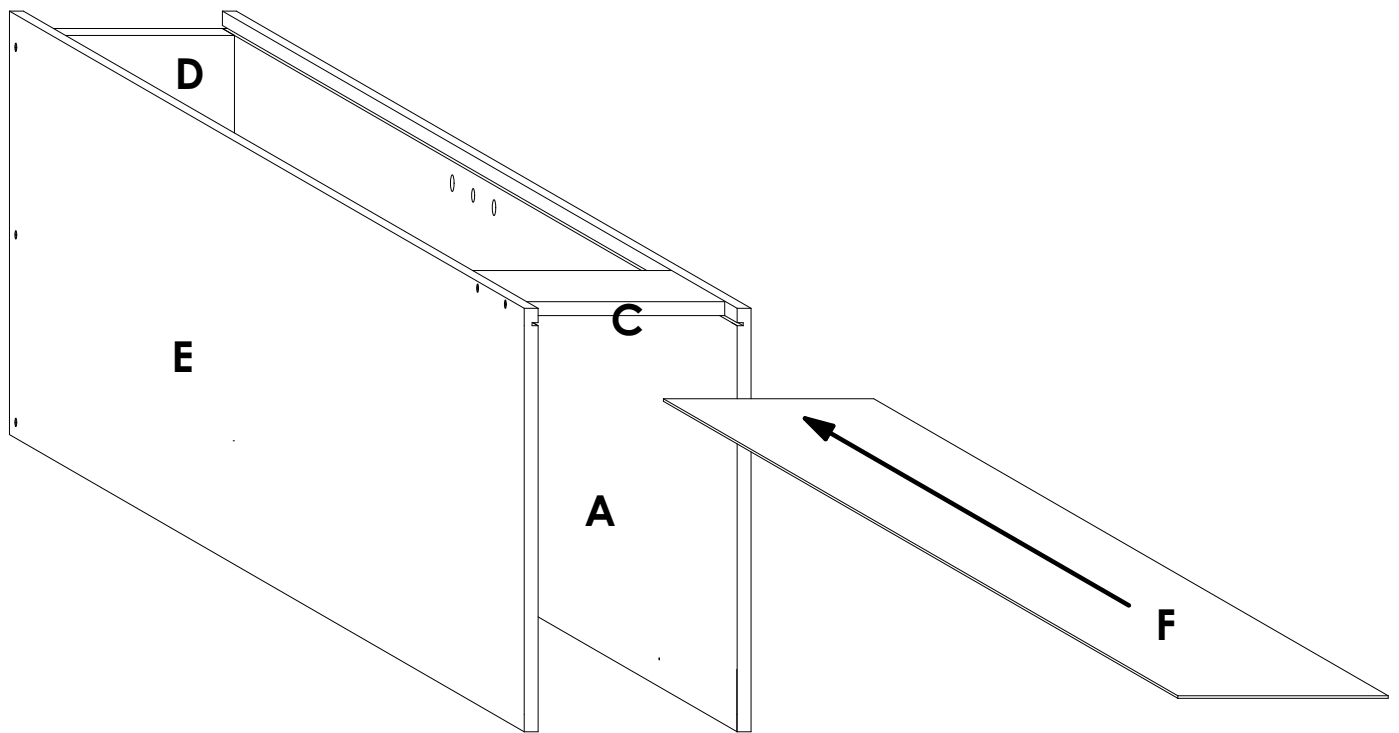


Slide the 3mm panel (F) into the groove on panels **A & E** with the finished side facing down.

STEP 4

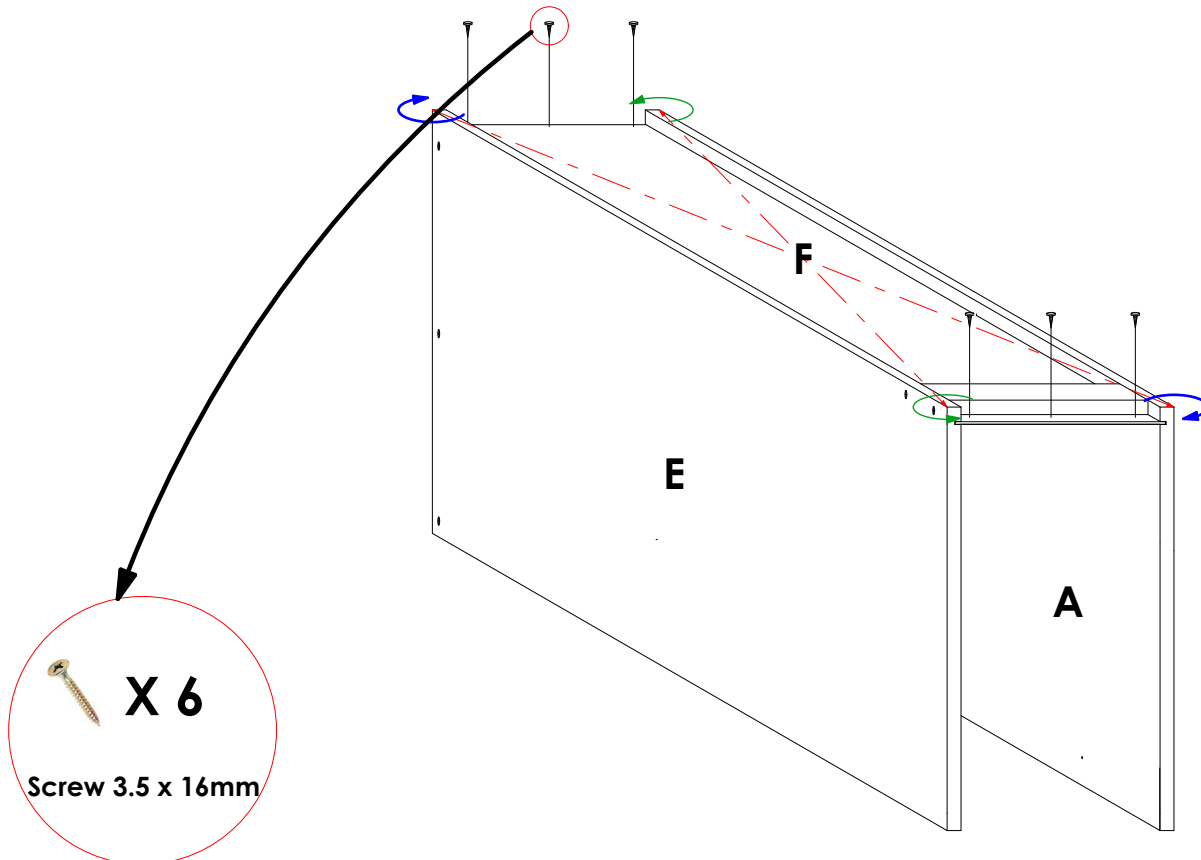


First, **check the diagonal** of the cabinet by measuring the two distances indicated by the broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, secure panel **F** to panels **C & D** as shown using **Screw 3.5 X 16mm**.

STEP 5

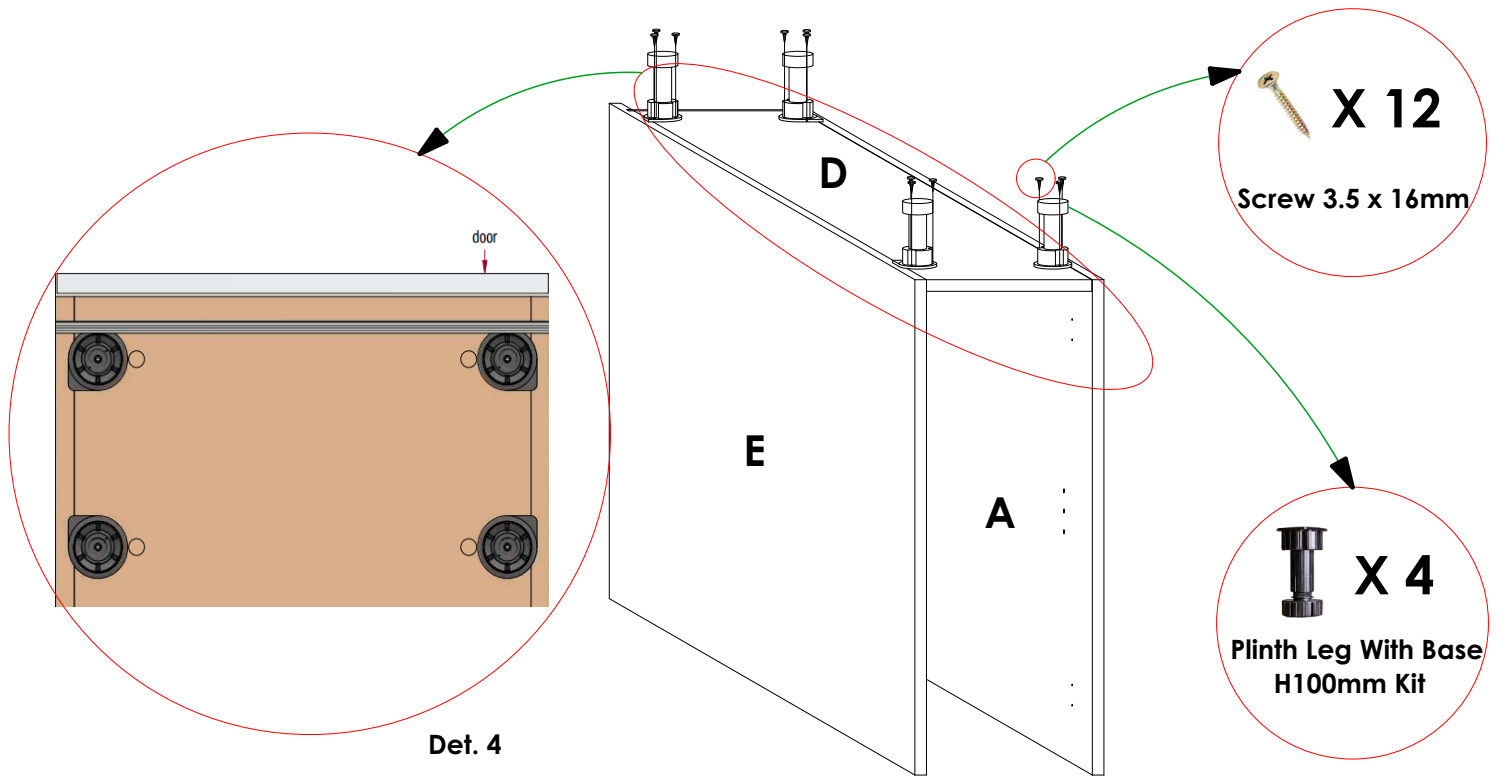

Flip the cabinet up-side down as shown. Place the four units of **Leg Adjustable Base 100mm** in the shown positions, aligning with the pre-drilled pilot holes on panel **D**. Ensure that the orientation is as shown in **Det. 4**. Using **Screw 3.5 X 16mm**, secure the legs onto panel **D**.





STEP 6

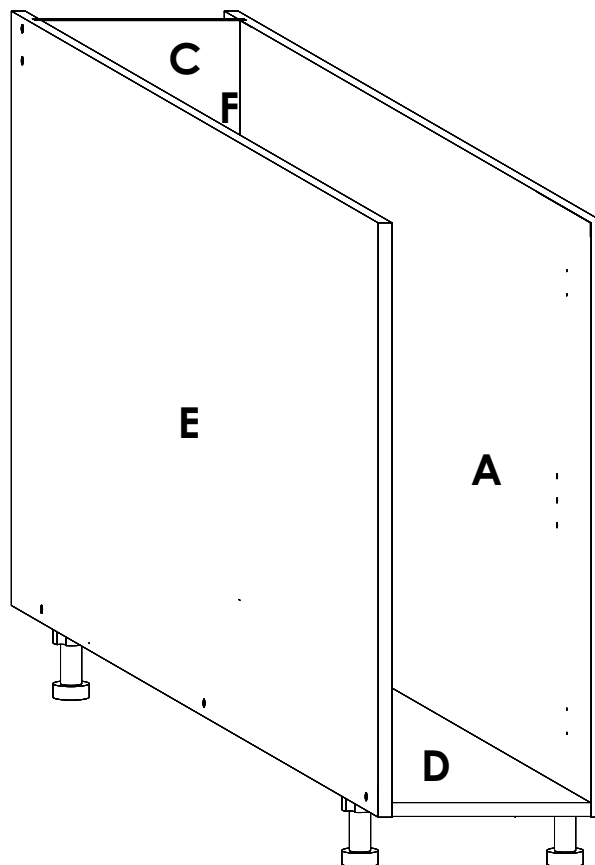


Flip the cabinet upright down as shown and confirm that the legs are secured firmly.

STEP 7

Fix the cantenaria profile as shown below. **Step 1;** Insert the end cap flush with the profile. **(View Det.5).** **Step 2;** Use the screw provided to securely fasten the end dowel to the profile and onto the panel A and panel E. **(View Det.6).** **Step 3;** Fix the cantenaria profile to the top using the special connecting plate. **(View Det.7)**

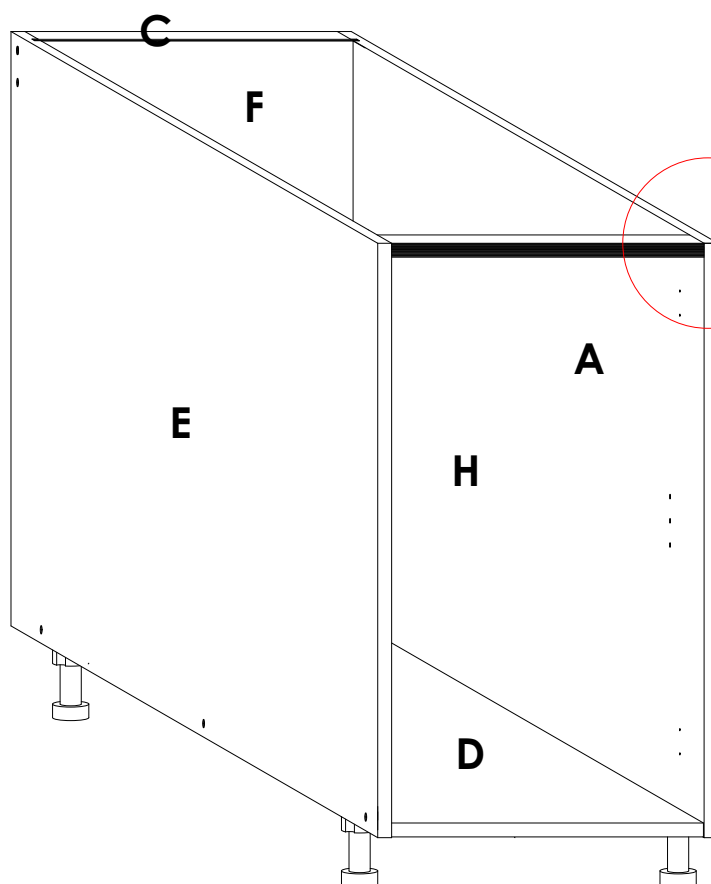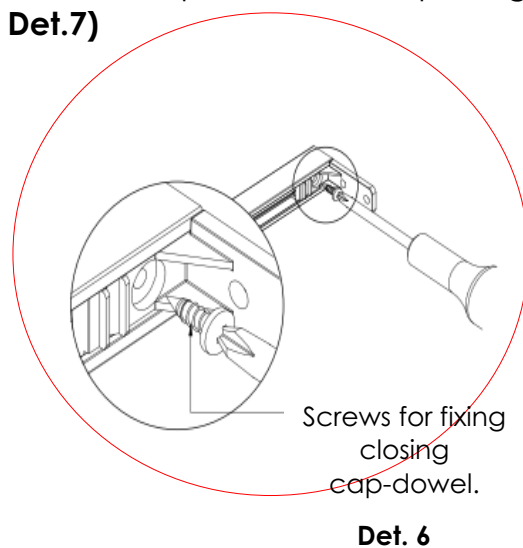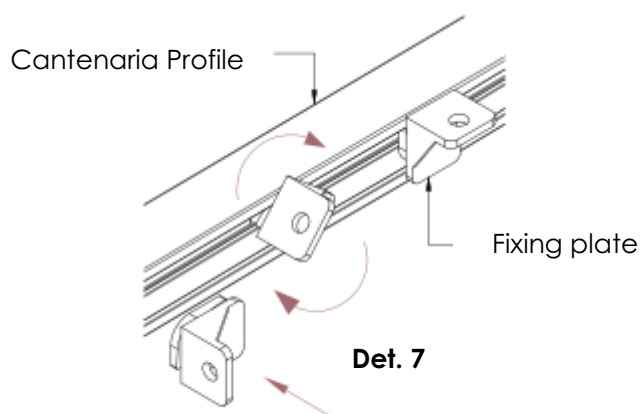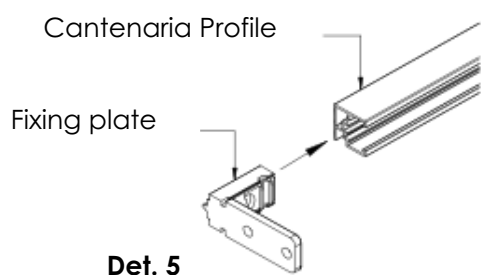


STEP 7

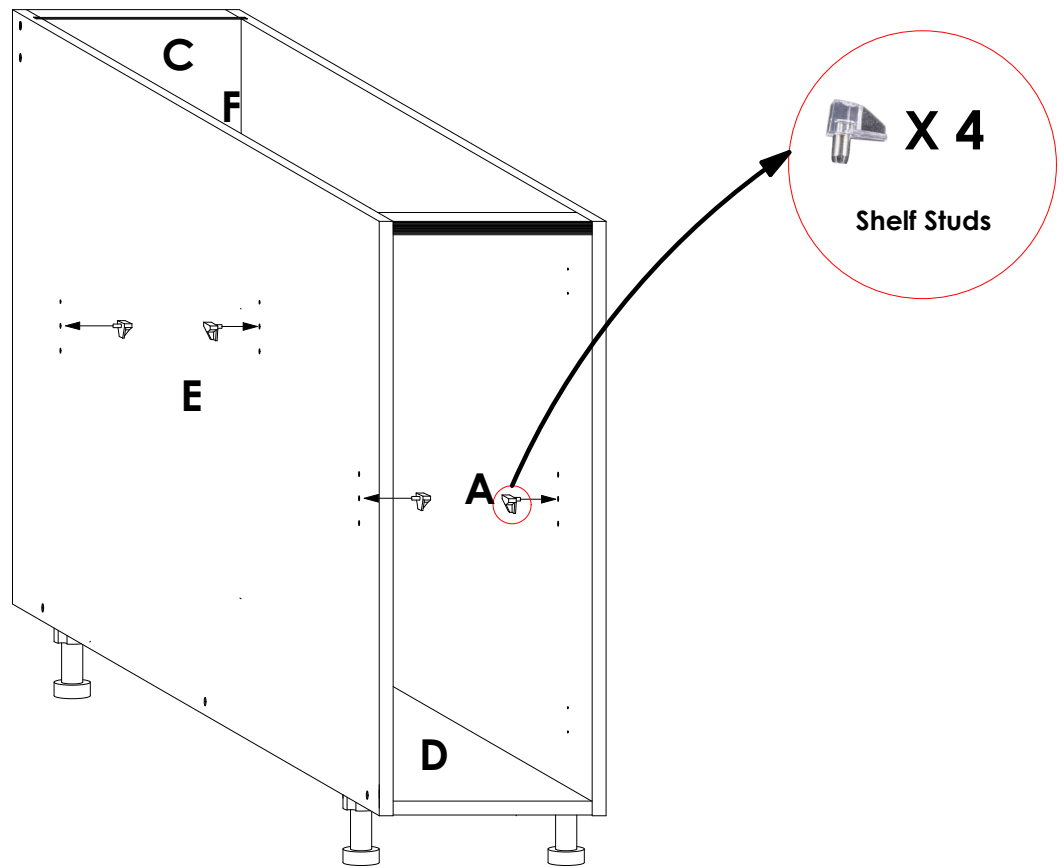

Insert the **Shelf Studs** in the shown positions.

STEP 8



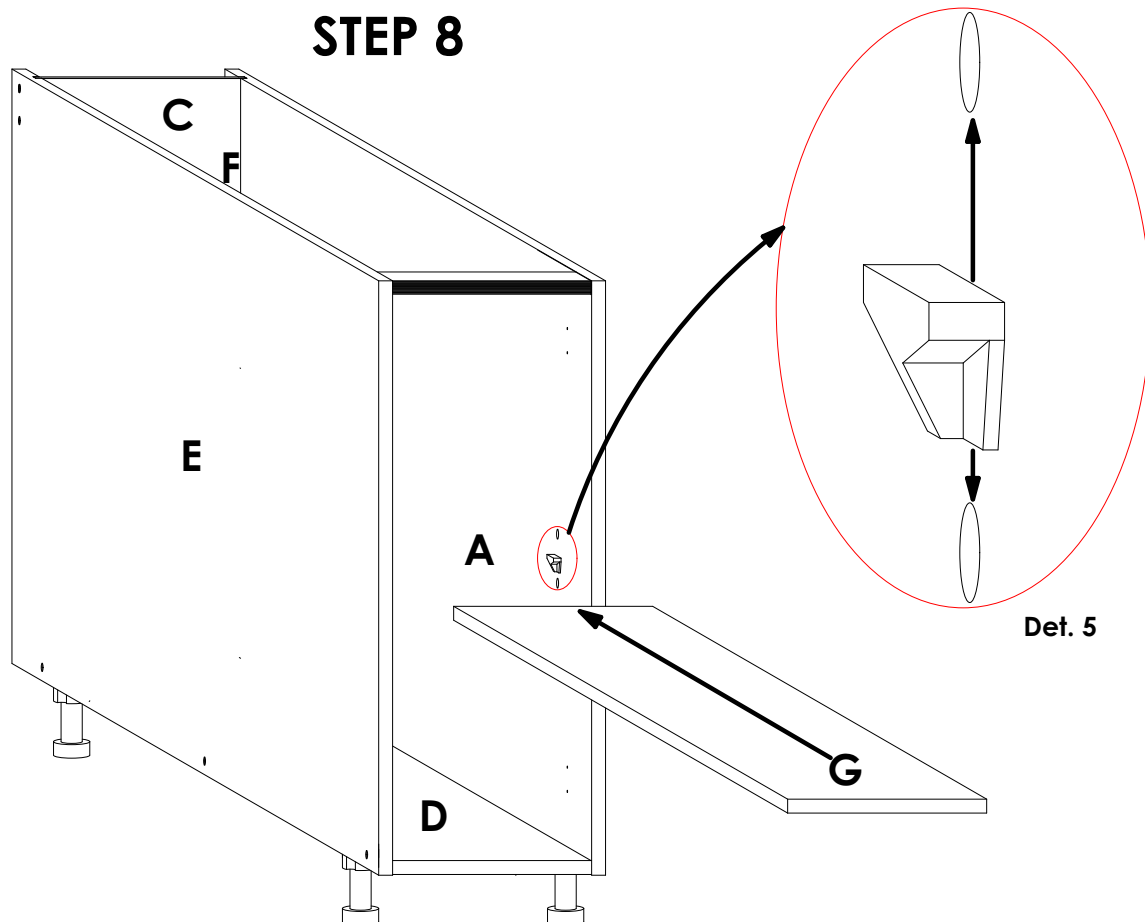








Slide in panel **G** as shown, such that it sits on the four shelf studs. The level of the shelf is adjustable by shifting the position of the shelf studs as shown in **Det. 5**. See Door Installation Guide for further instructions.

PULL OUT BASKET ASSEMBLY GUIDE

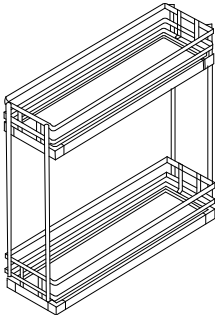

HARDWARE


 1PC	 B-2PCS	 C-2PCS	 D-2PCS	 B-2PCS
	 A-1PC		 E-2PCS	
	 F-8PCS(30MM)		 G-10PCS(16MM)	

GENERAL INSTRUCTIONS


Always read the full instructions prior to installation.

- Consider possible obstructions to your parts & accessories, like hinges inside the cabinet or adjacent cabinet doors and handles, prior to installation.
 - Make sure you leave plumbing and electrical work to qualified trades people. Never try this yourself.
 - Make sure you always use safety gear like a mask, ear muffs and glasses when using tools.
- **Tip:** After marking out the pre-drill holes as per the instructions, take the part that is to be installed and align the appropriate holes with the markings to ensure they match up prior to pre-drilling the holes.


TOOLS REQUIRED

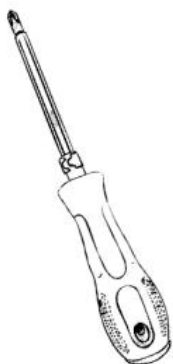

Screw Driver
(Pozidriv Head)


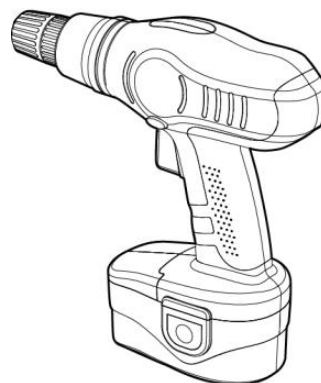


Cordless Drill

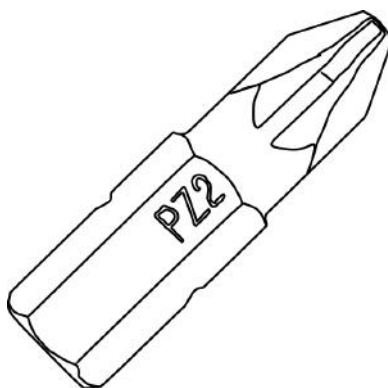


Pozi Bit (PZ2)


COMPATIBLE WITH BASE CABINET 250MM AND 300MM

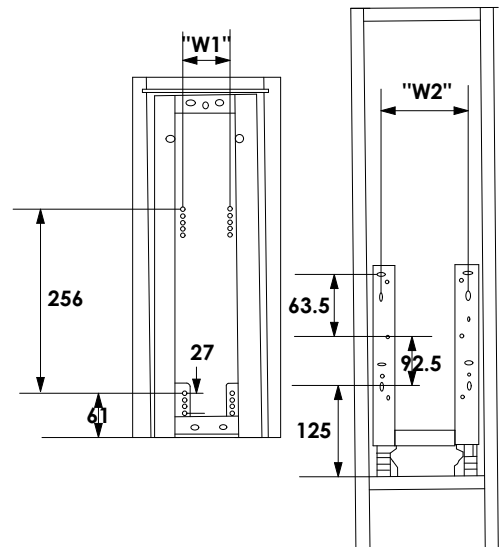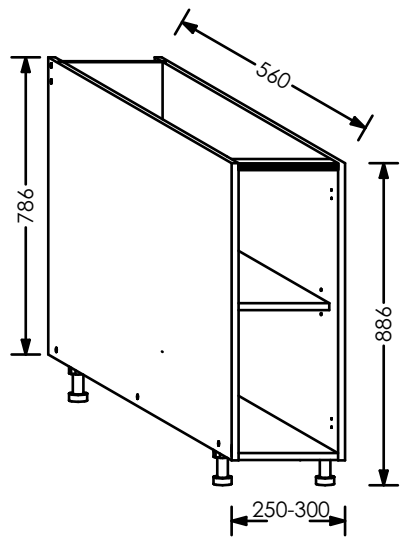


STEP 1

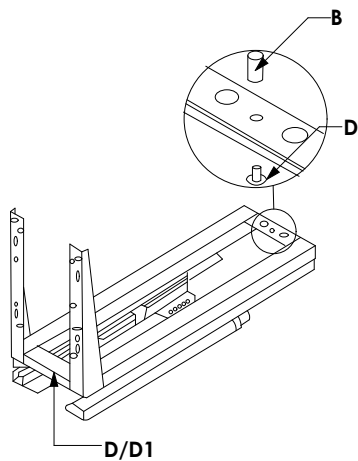


STEP 2

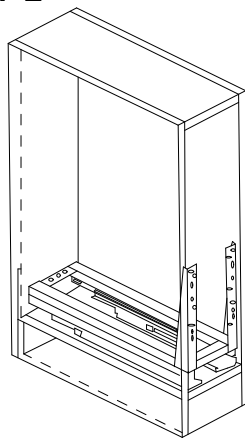

STEP 3

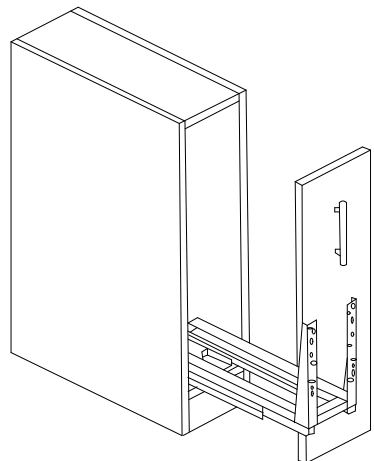

STEP 4

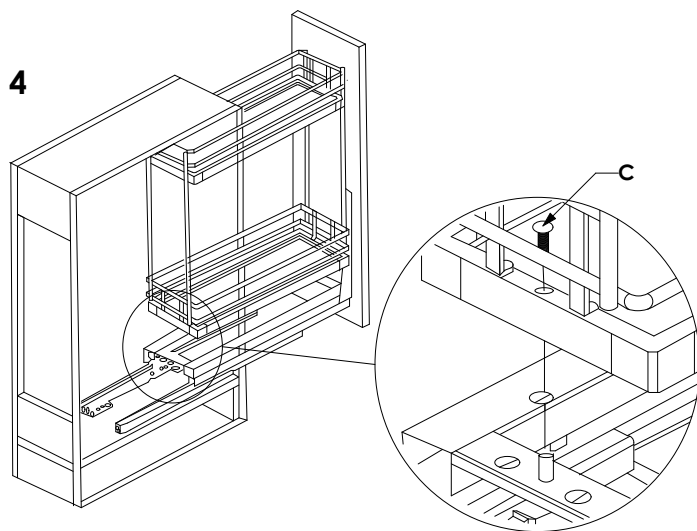

STEP 5

