





# KINETIC FLATPAX RANGE ASSEMBLY GUIDE

## TALL CABINET OVEN/MICRO 600mm

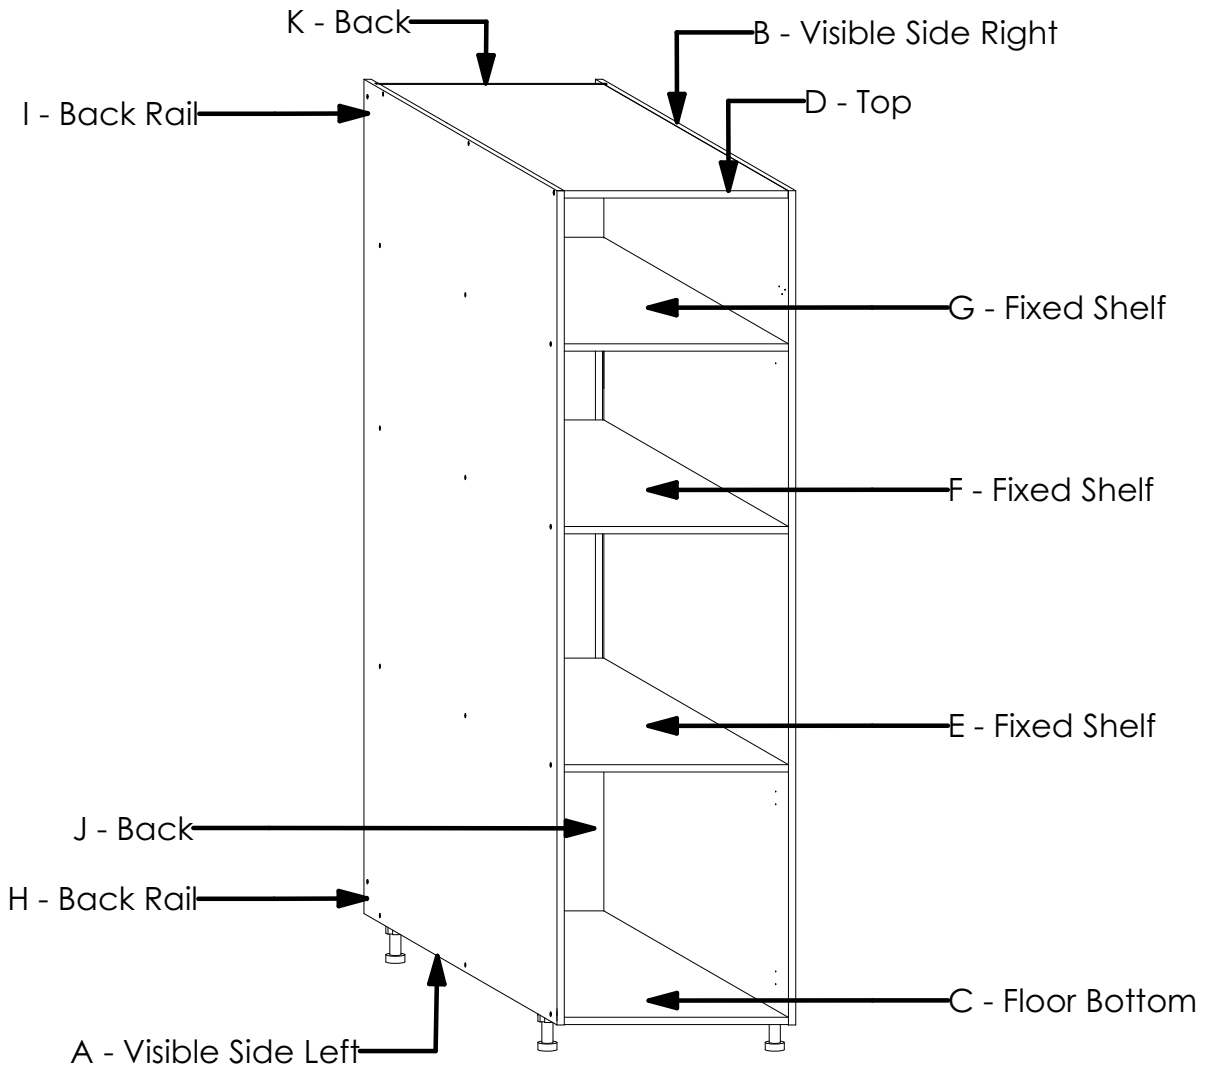

**TOTAL NUMBER OF PANELS: 11**

### HARDWARE

PRODUCT	QTY	IMAGE
Screw 4.0 x 50mm	38	
Screw 3.5 x 16mm	32	
Plinth Leg With Base H100mm Kit	4	


# GENERAL INSTRUCTIONS

1. Confirm that all panels (11) are in the package before assembling.
2. Check the white sticker on each panel for the labelling (A, B, C, D, E, F, G, H, I, J & K).
3. Ensure that the panels are laid on a non-abrasive surface when assembling.
4. Countersink the holes on the side panels before inserting the screws.
5. Ensure that the screw is perpendicular to the surface being drilled for a clean and strong joint.


## TOOLS REQUIRED



Screw Driver  
(Pozidriv Head)

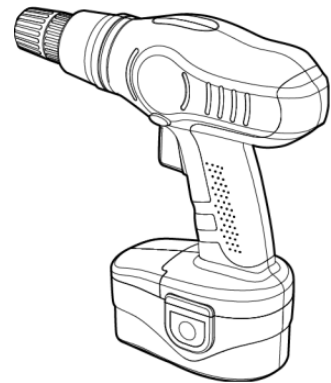


Cordless Drill

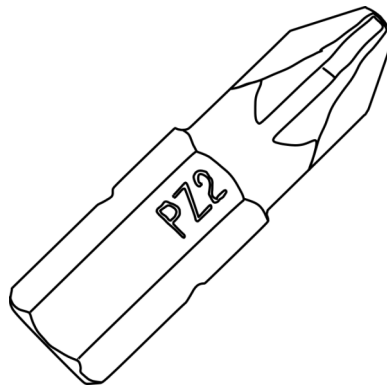


Pozi Bit (PZ2)

# STEP 1

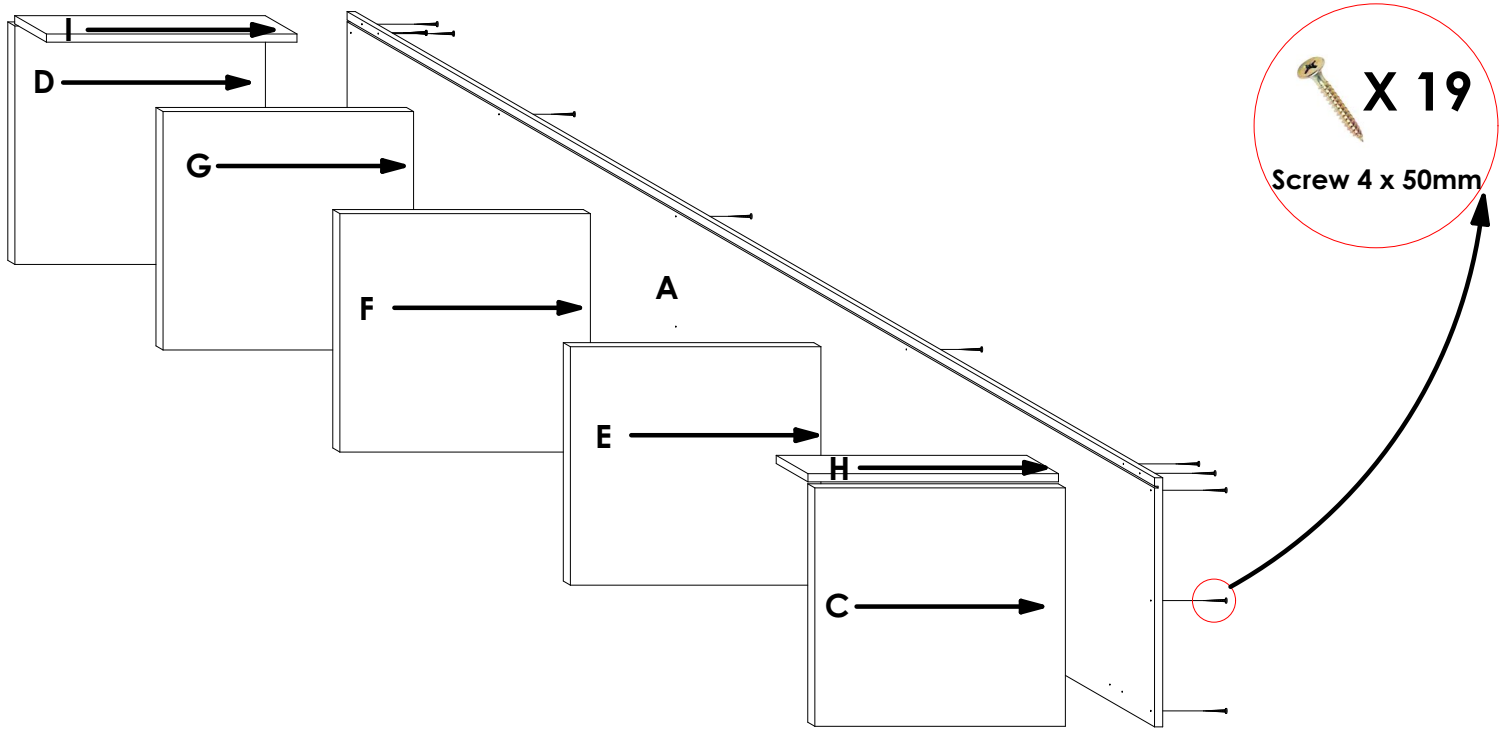


Connect panels **C, H, E, F, G, I & D** to panel **A** using **Screw 4.0 X 50mm** in the pre-drilled pilot holes as shown. Refer to **Det 1 - 4** below before fastening the screws.

# STEP 2

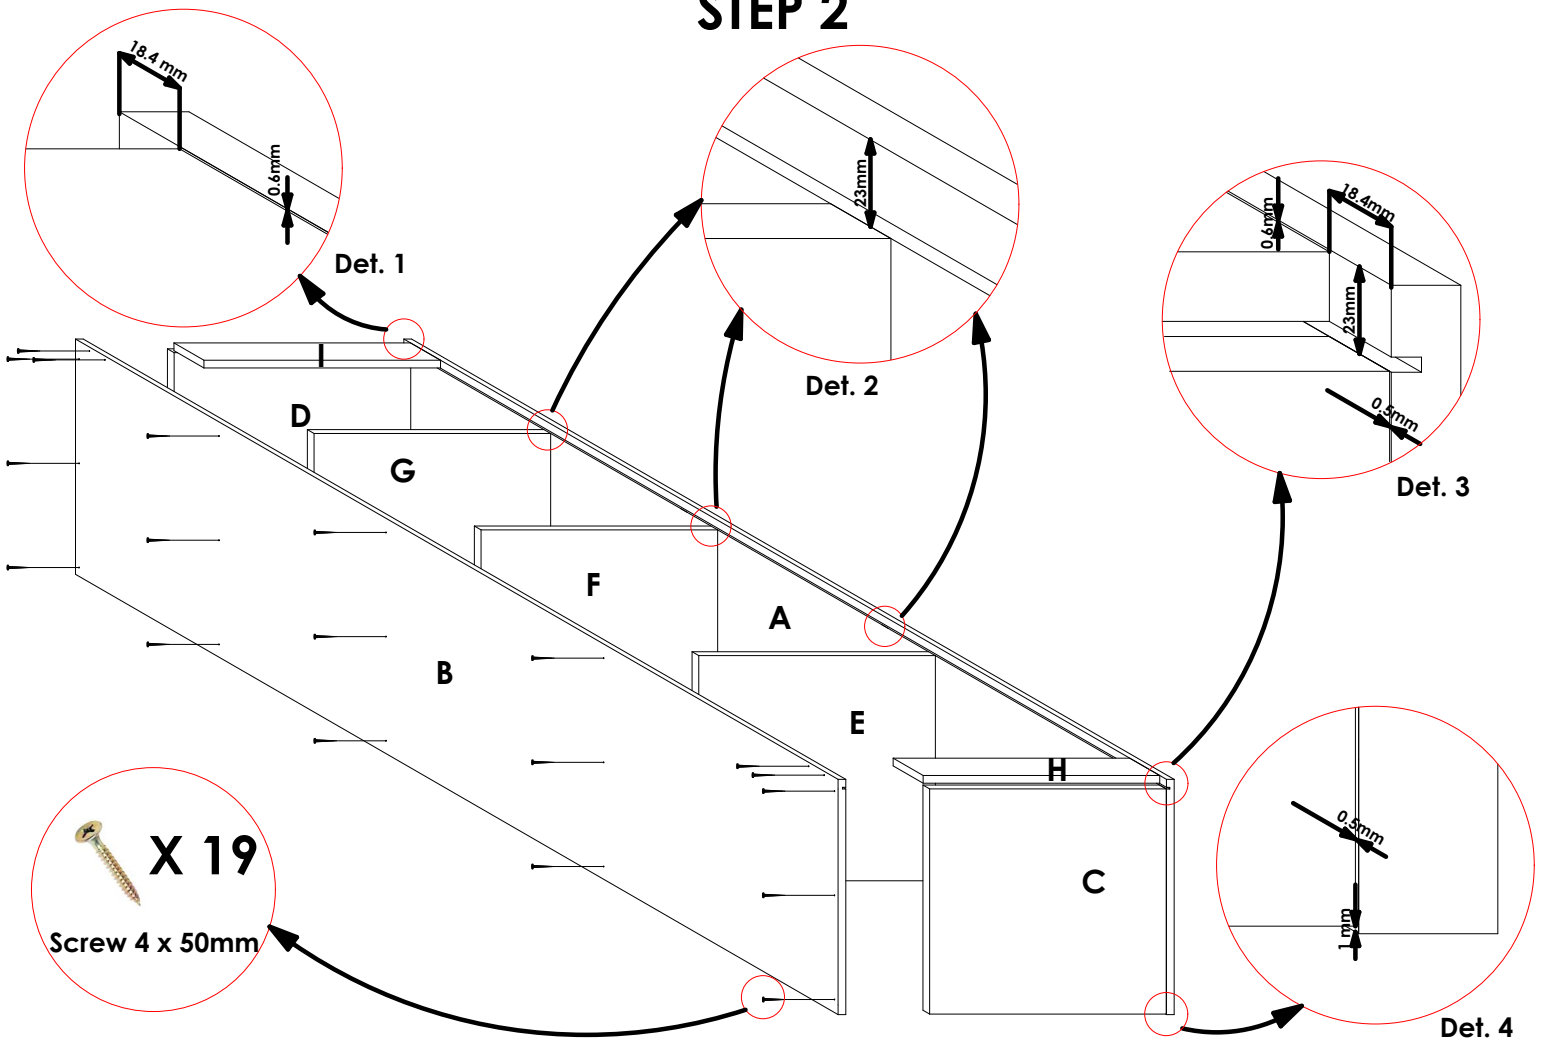


Connect panel **B** to panels **C, H, E, F, G, I & D** using **Screw 4.0 X 50mm** in the pre-drilled pilot holes as shown. Ensure that the **symmetry** between panel **B** and panel **A** is maintained. Refer to **Det 1 -**

## STEP 3

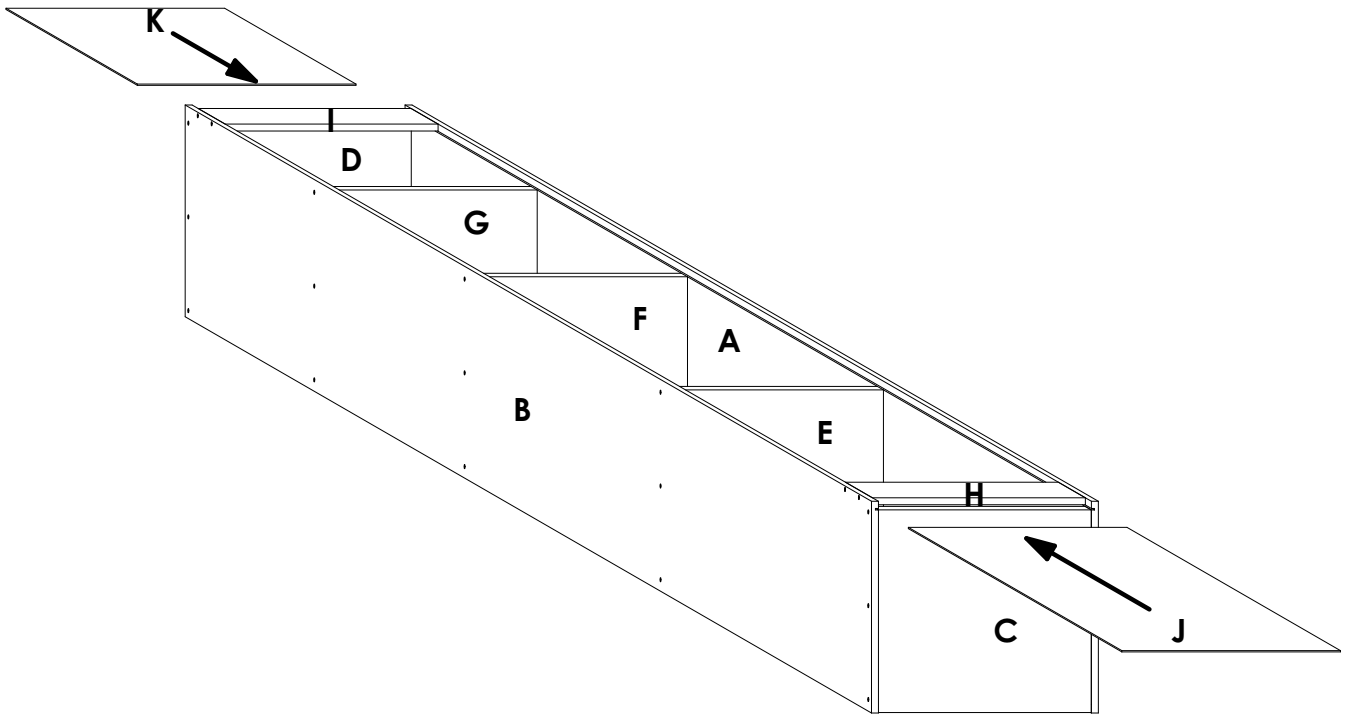


Slide the 3mm panels **J & K** into the groove on panels **A & B** with the finished side facing down.

## STEP 4

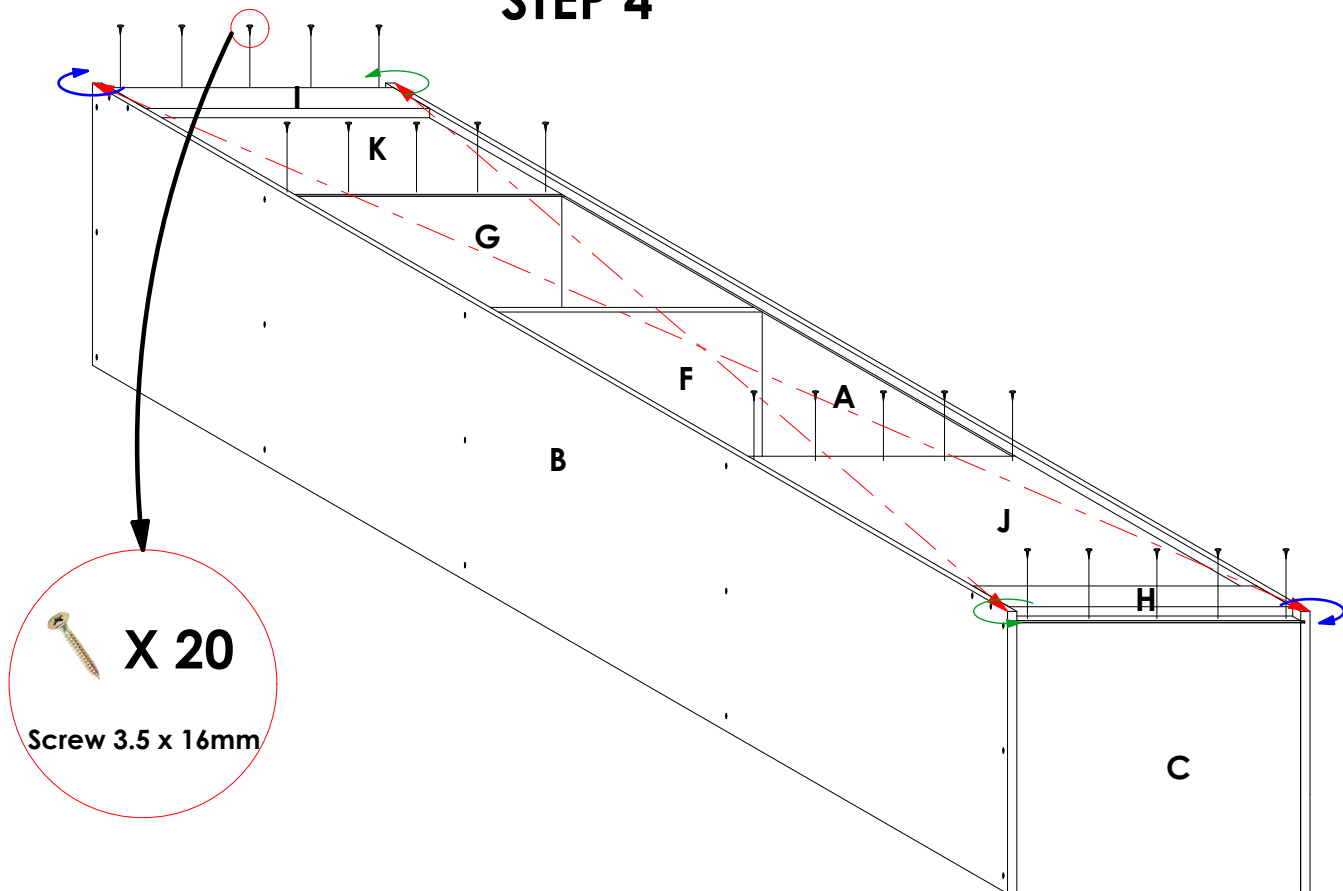


First, **check the diagonal** of the cabinet by measuring the two distances indicated by the broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, secure panel **J** to panels **C & E** and, panel **K** to panels **G & D** as shown using **Screw 3.5 X 16mm**.

## STEP 5

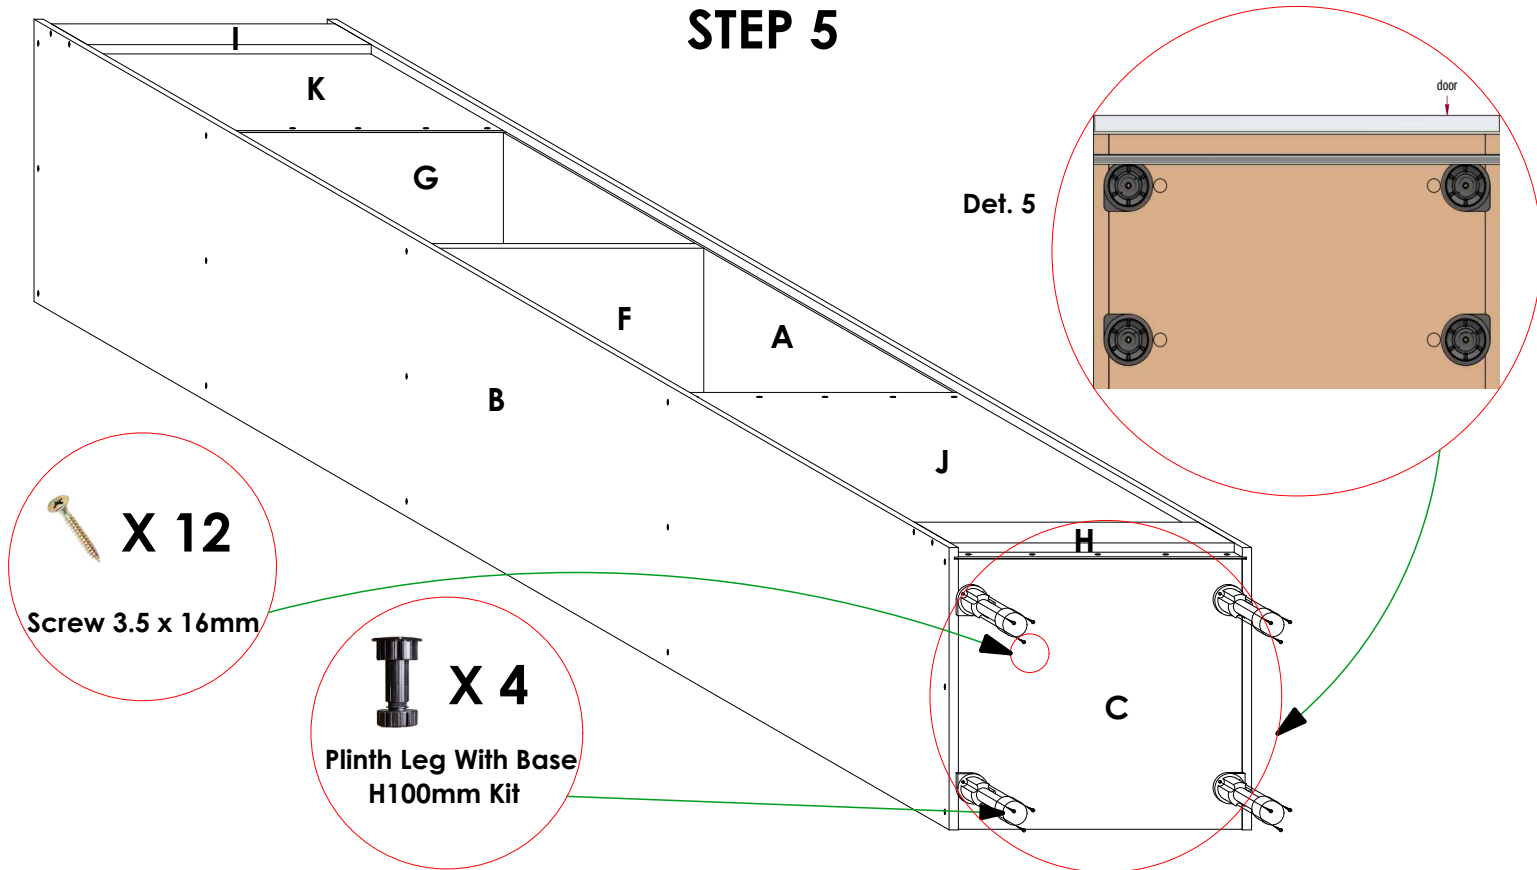

Place the four units of **Leg Adjustable Base 100mm** in the shown positions, aligning with the pre-drilled pilot holes on panel **C**. Ensure that the orientation is as shown in **Det. 5**. Using **Screw 3.5 X 16mm**, secure the legs onto panel **C**.

## STEP 6

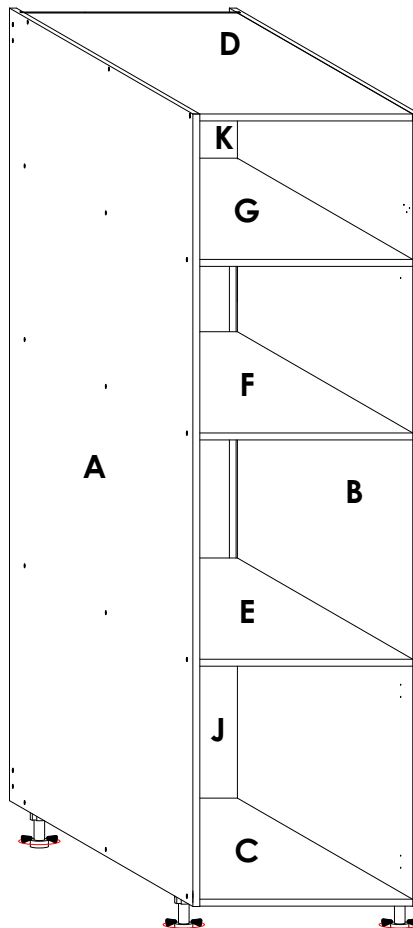

Flip the cabinet upright down as shown and adjust the legs (**rotate the base of the leg as shown**) to level the cabinet. See Door and Dummy Panel installation guides for further instructions.