


EDGLINE QUICKLOC FLATPAX KITCHEN RANGE





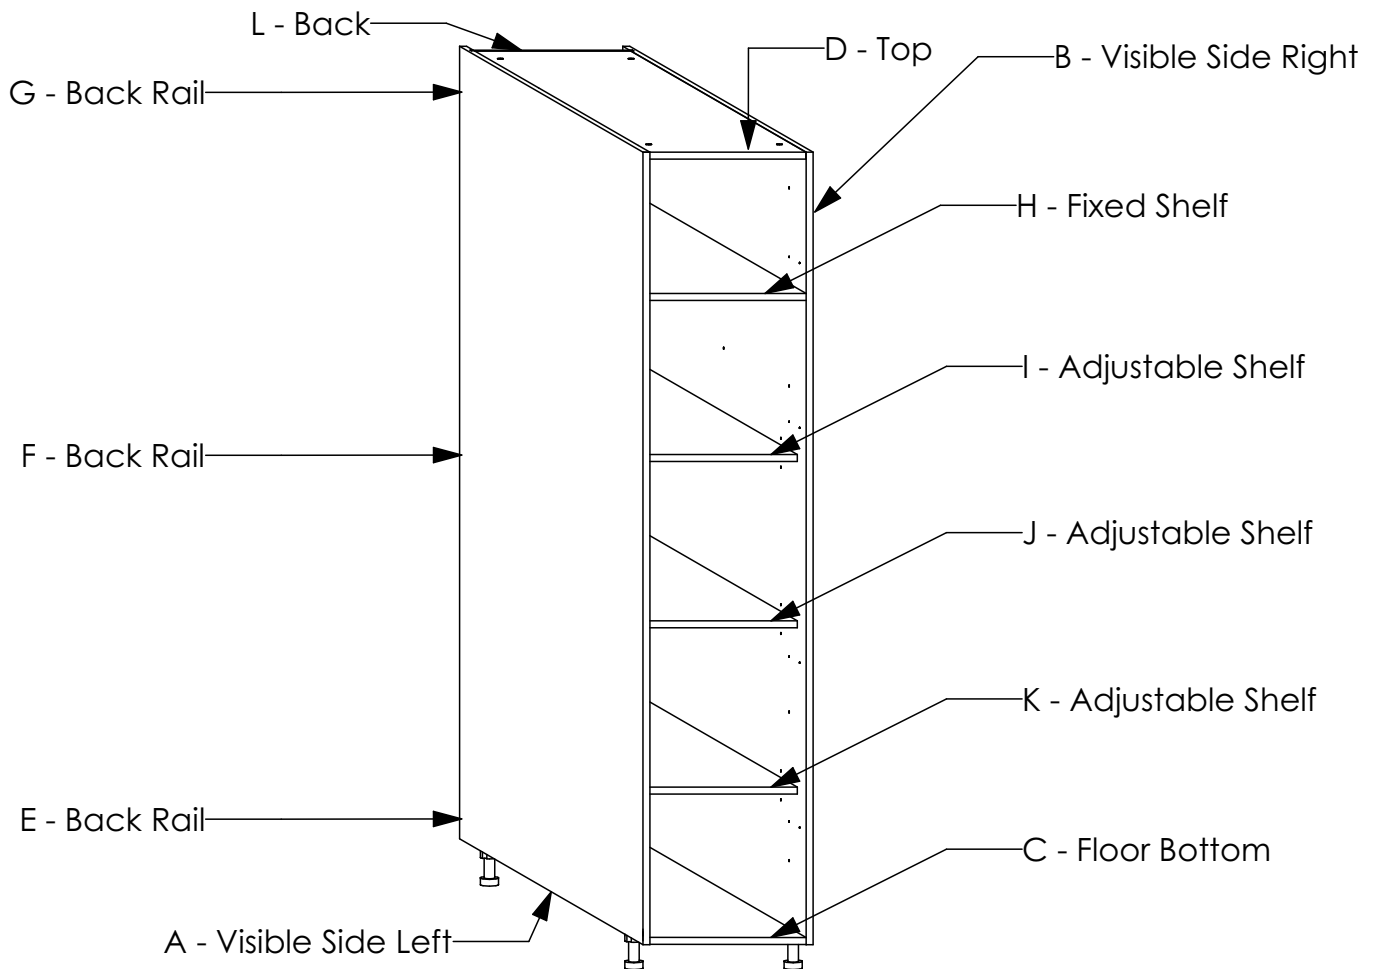


ASSEMBLY GUIDE

TALL CABINET 300mm



TOTAL NUMBER OF PANELS: 12

HARDWARE

PRODUCT	QTY	IMAGE
Sys5 Quickfit TL2 Dowel 8 x 34mm	18	
Sys5 Cam 3000 15X14mm	18	
Wooden Dowel Titus 8 x 30mm	36	
Screw 3.5 x 16mm	22	
Plinth Leg With Base H100mm Kit	4	
Cabinet Connecting Screw Kit	8	
Shelf Support Flipper 14mm Kit	12	

TOOLS REQUIRED




Screw Driver
(Pozi Drive Head)



Cordless Drill



Pozi Bit (PZ2)



8mm Drill Bit




Rubber Mallet


GENERAL INSTRUCTIONS

1. Confirm that all panels (12) are in the package before assembling.
2. Check the white sticker on each panel for the labelling (A, B, C, D, E, F, G, H, I, J, K & L).
3. Ensure that the panels are laid on a non-abrasive surface when assembling.
4. Note that all panel connections are done using the system described below.


PANEL CONNECTION AND FASTENING

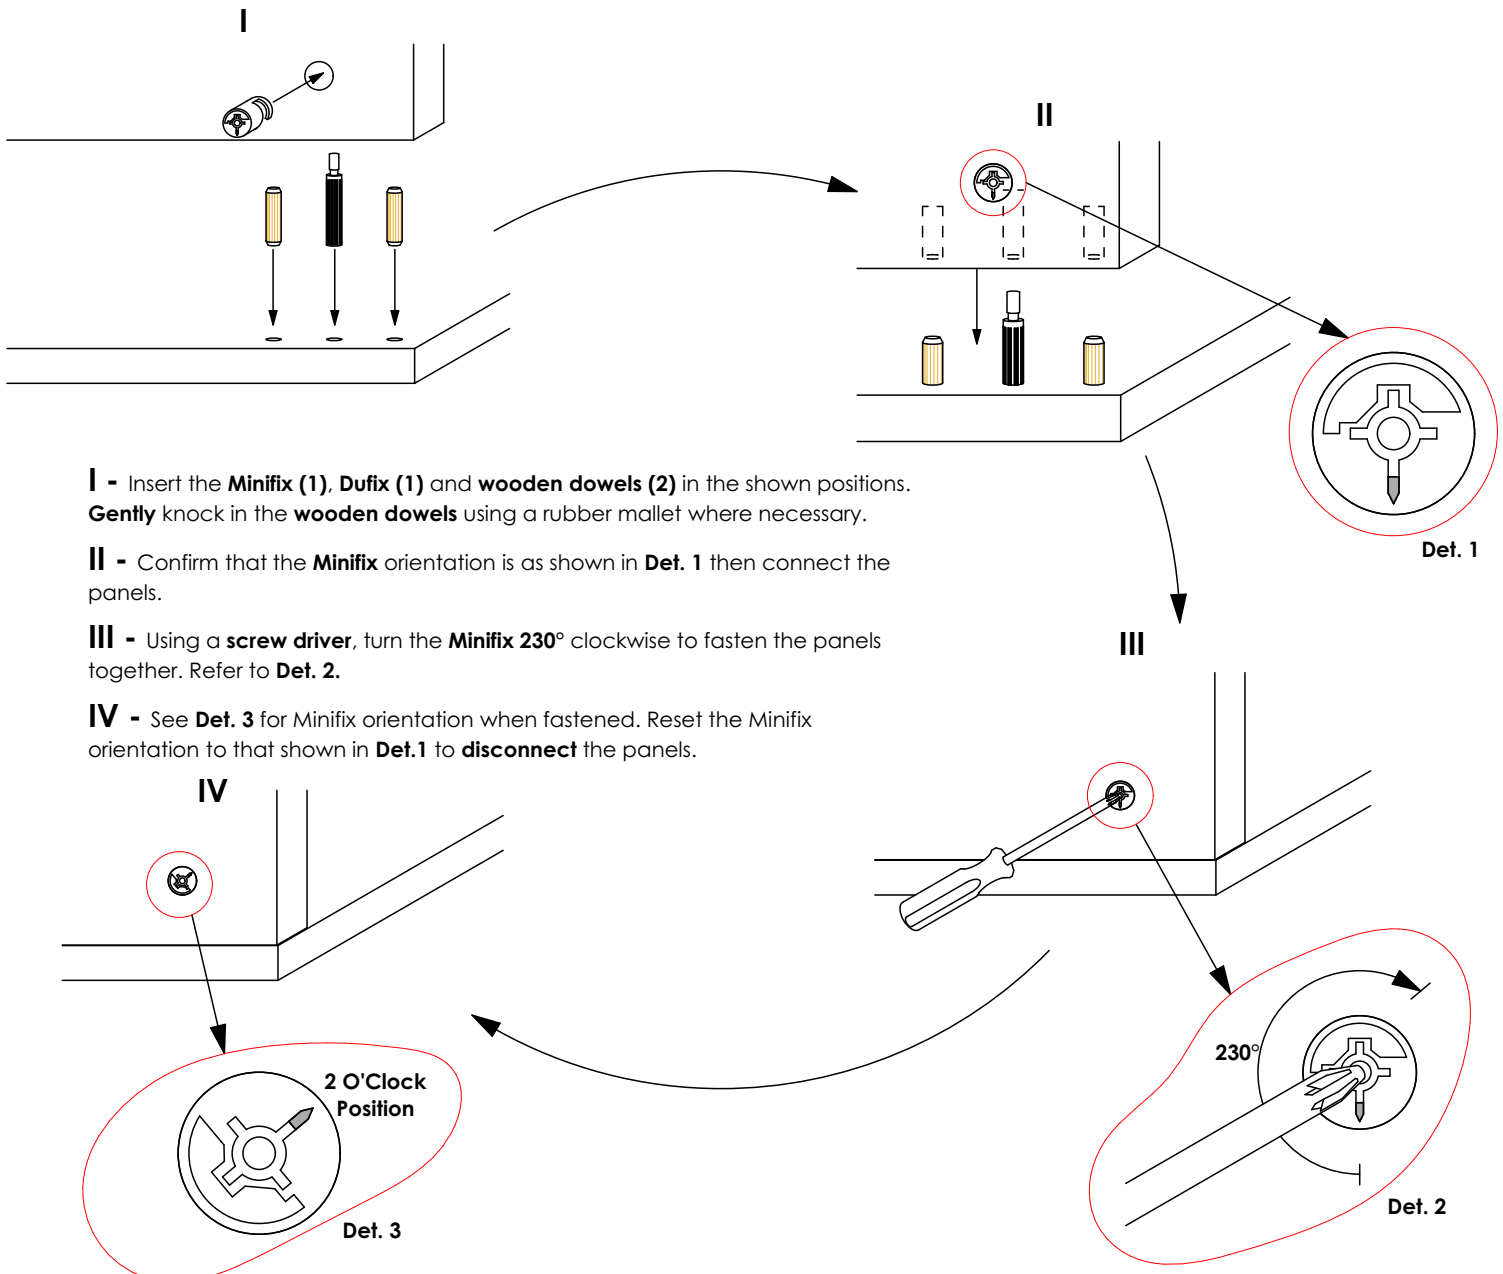

PILOT HOLES KEY FOR SIDE PANELS

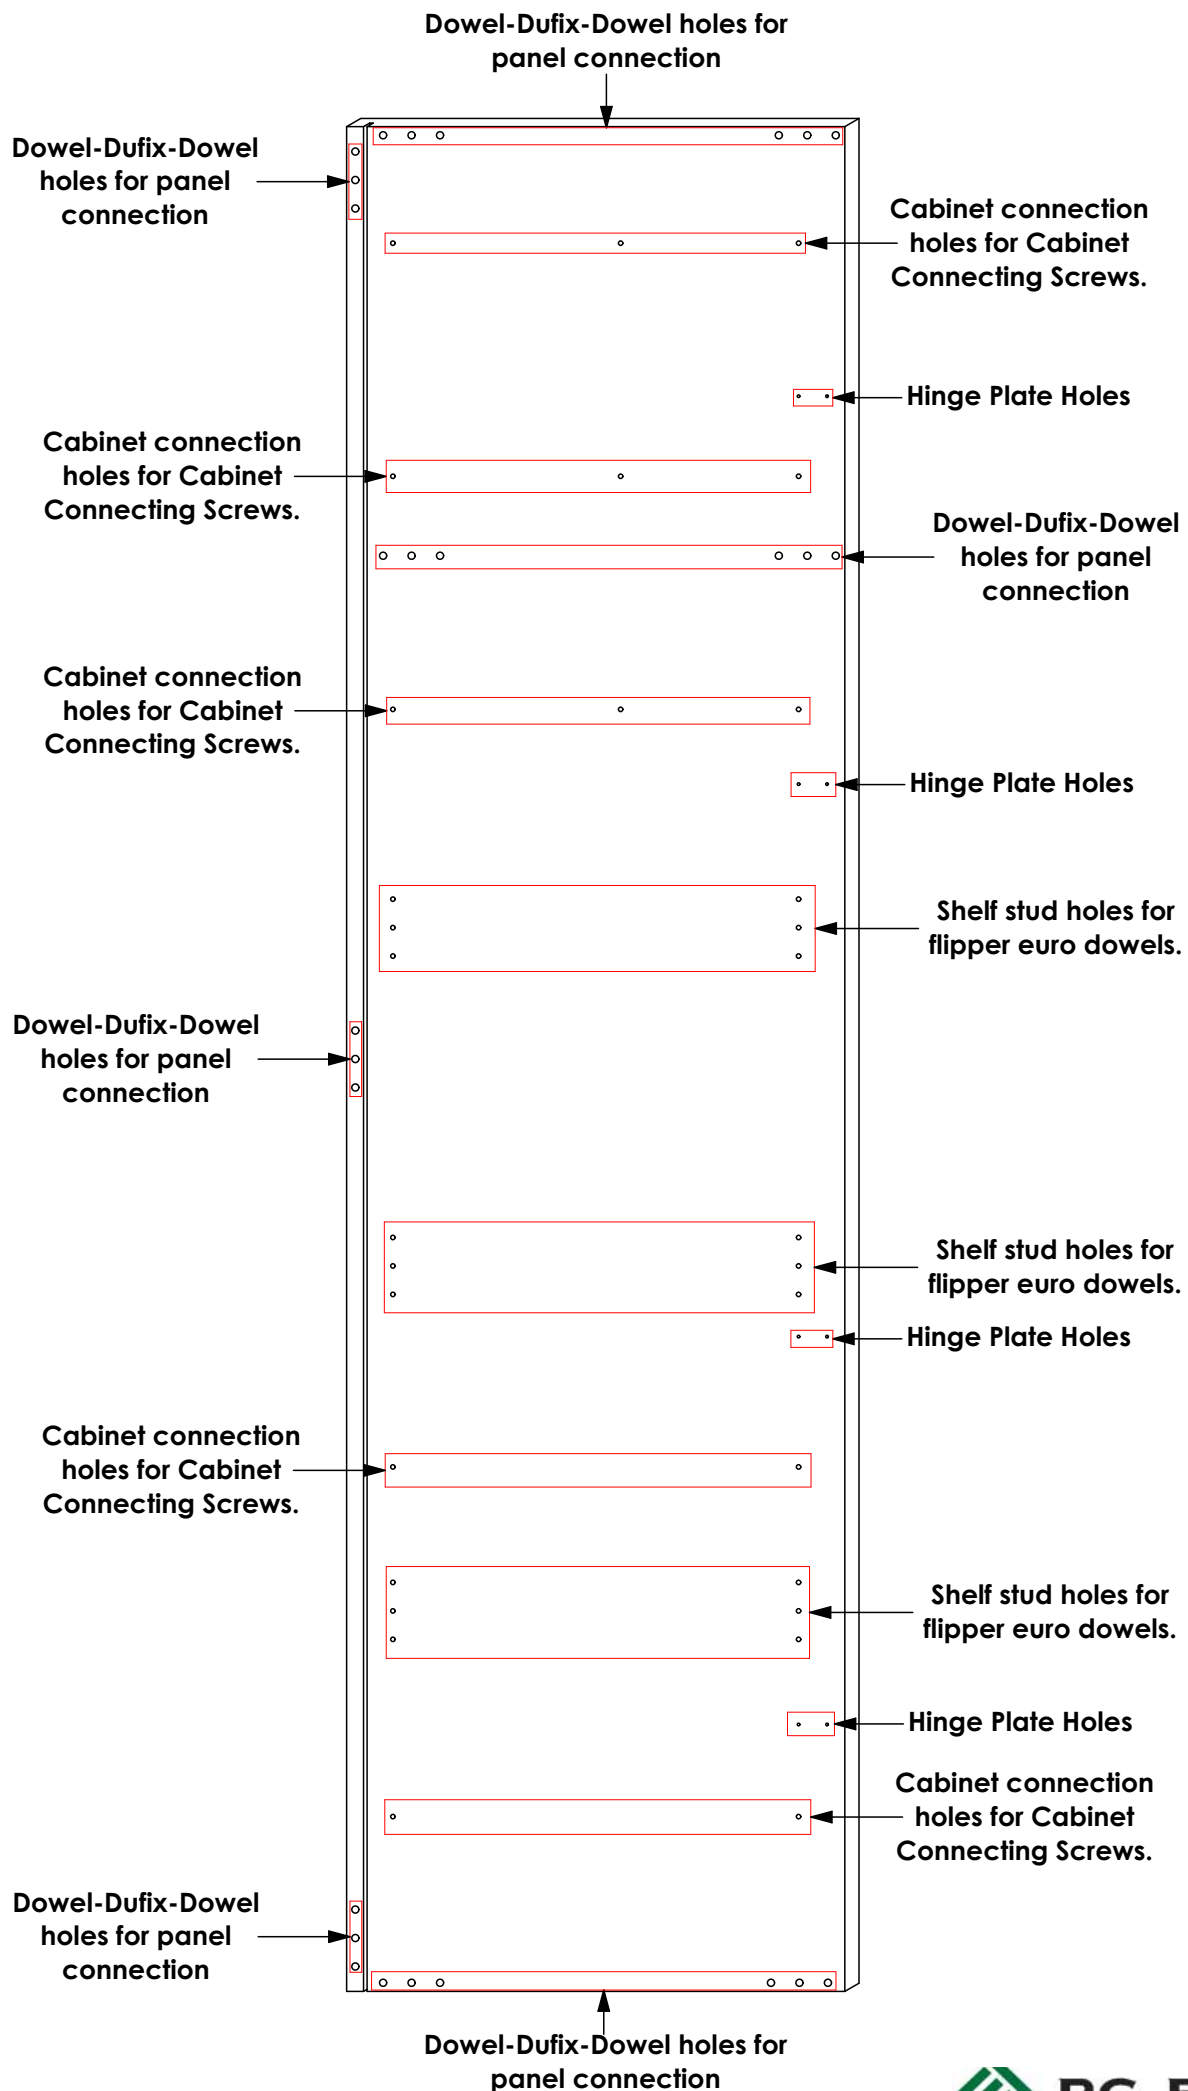


STEP 1

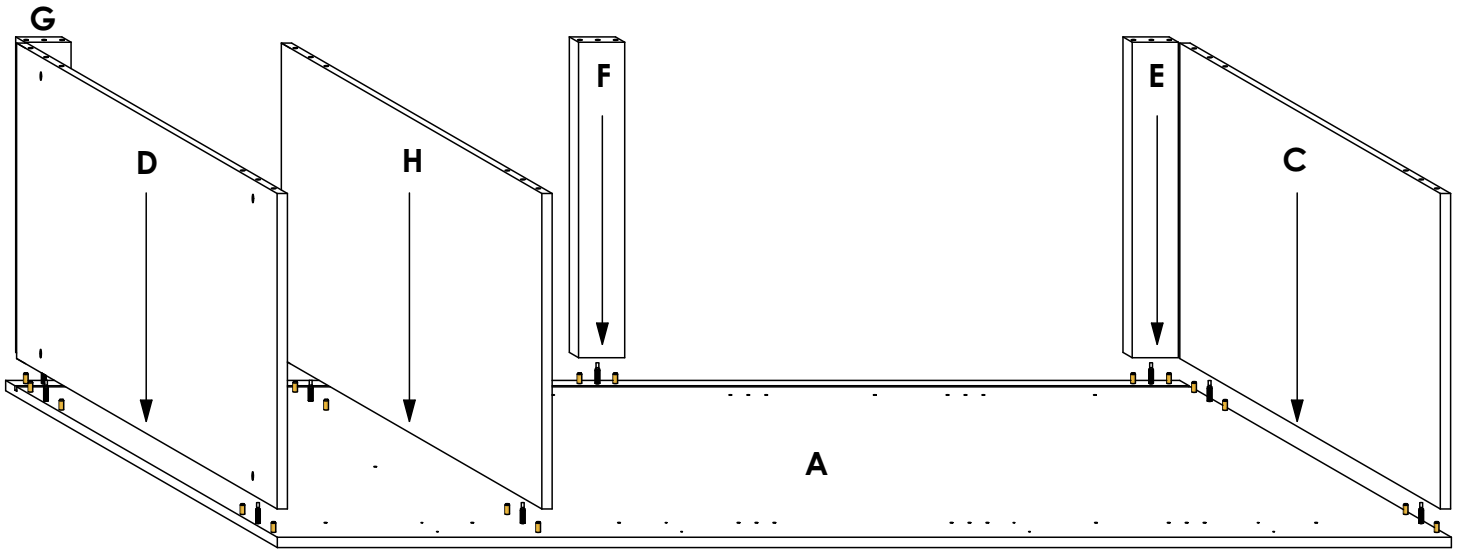


Connect panels **C, D, E, F, G & H** to panel **A** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

STEP 2

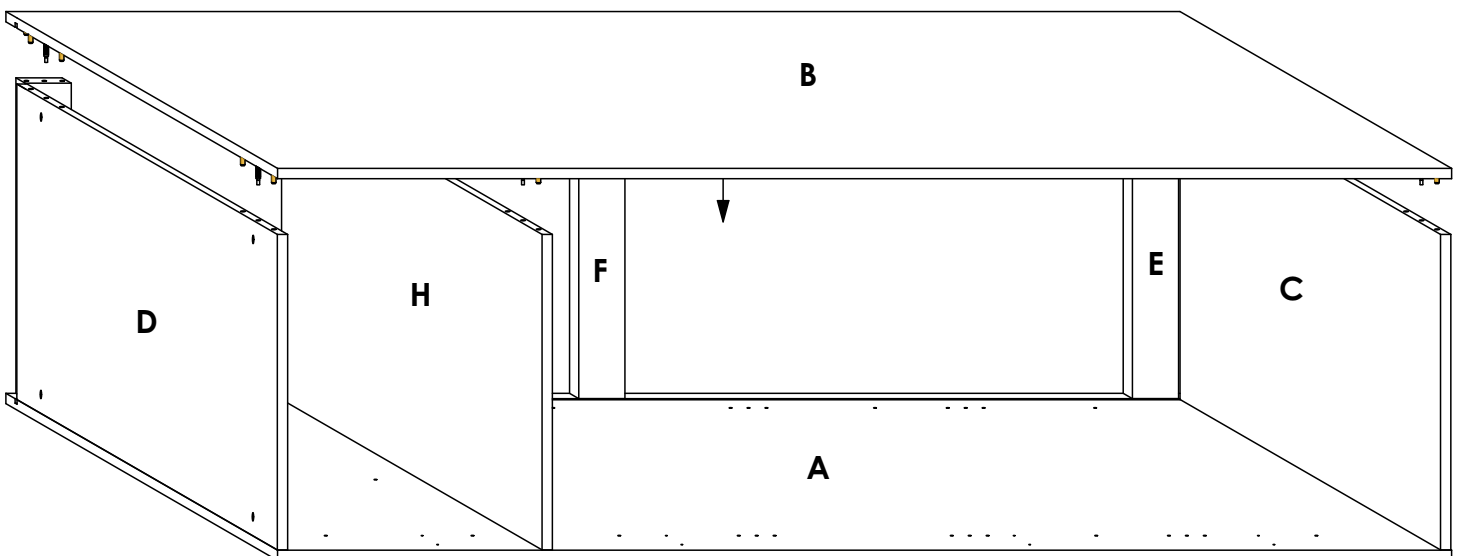


Connect panel **B** to panels **C, D, E, F, G & H** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

STEP 3

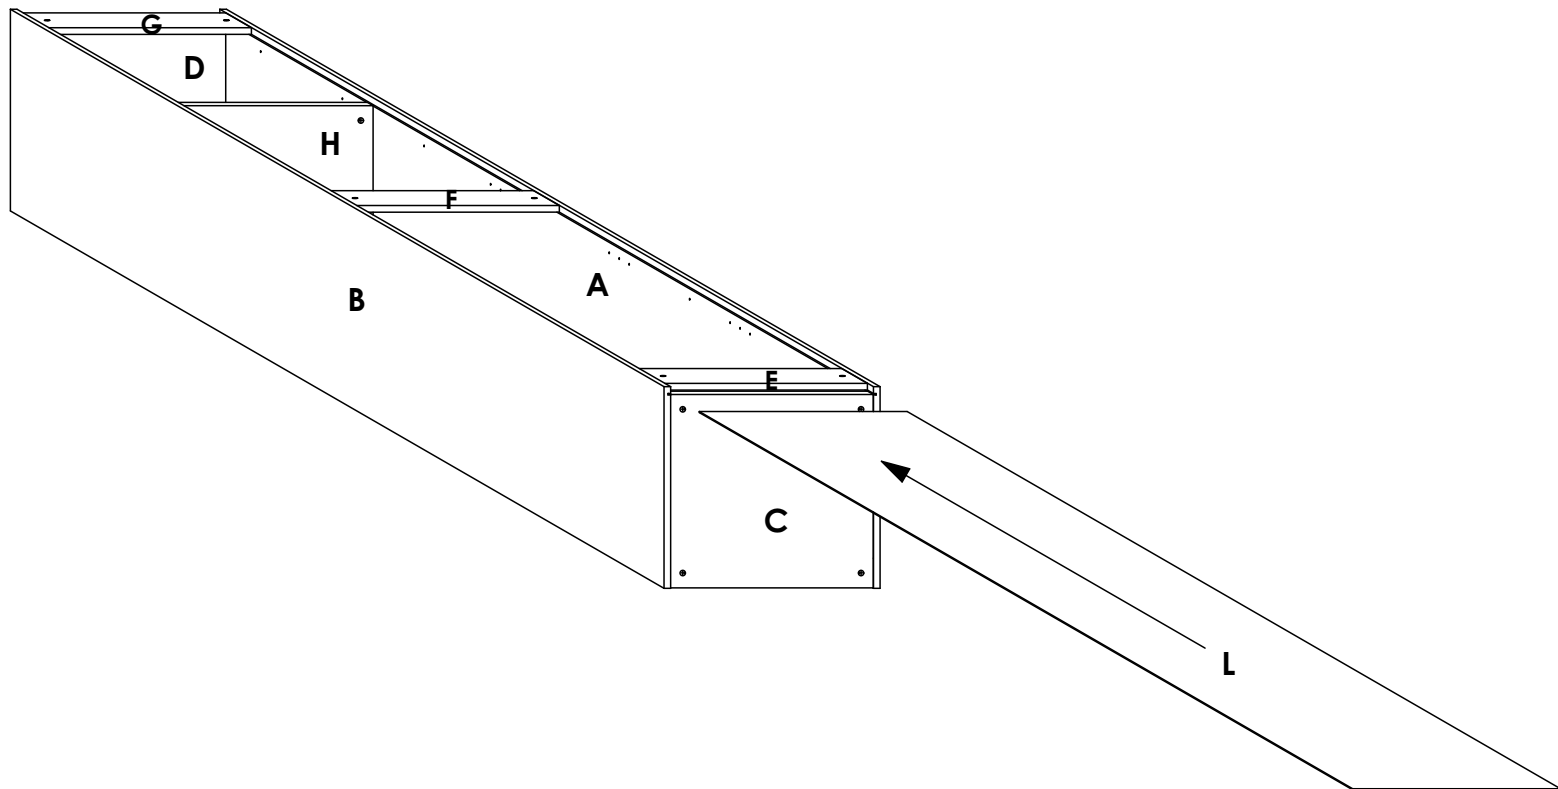


Slide the 3mm panel (L) into the groove on panels **A & B** with the finished side facing down. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

STEP 4

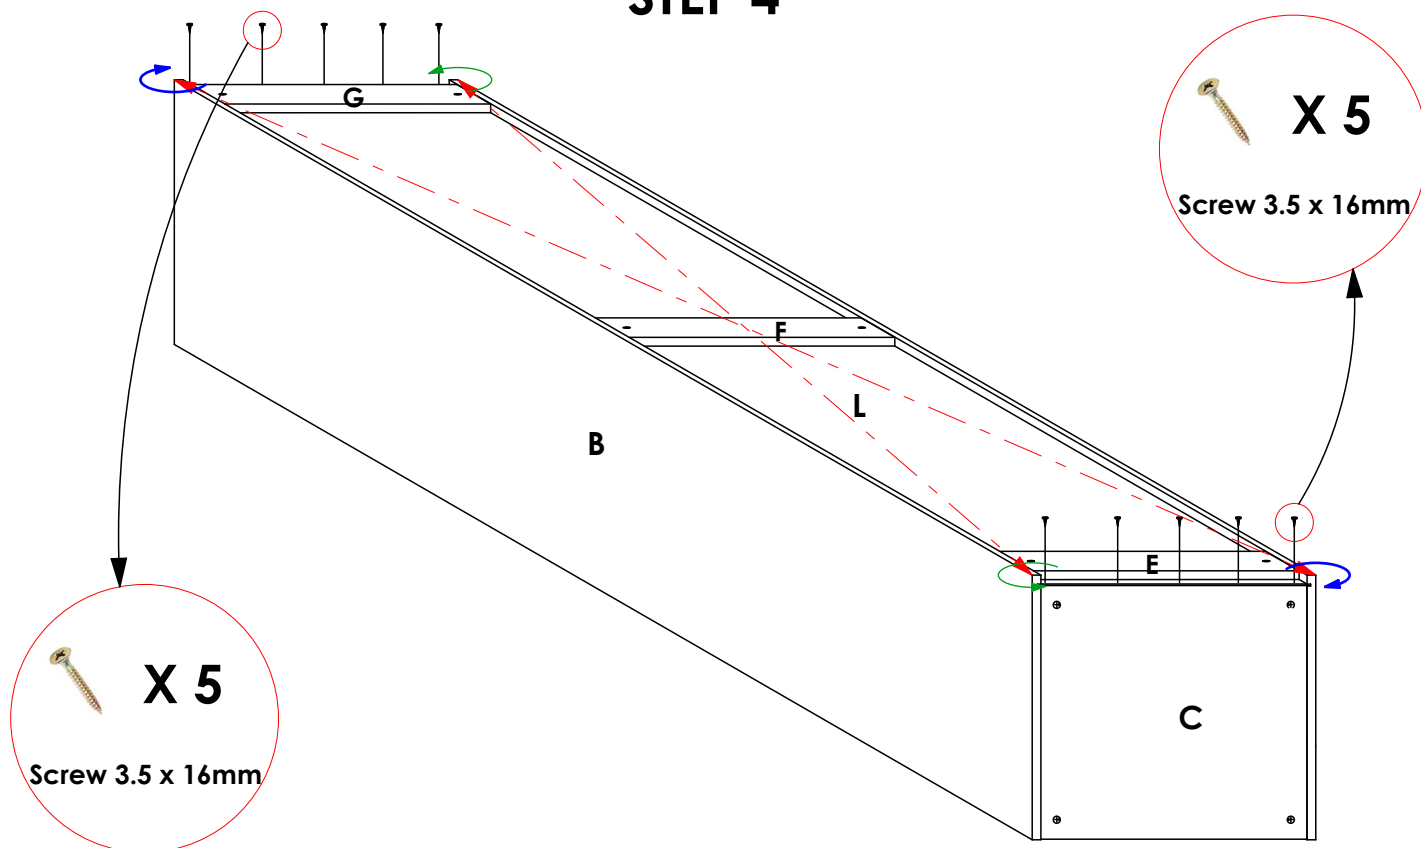


First, **check the diagonal** of the cabinet by measuring the two distances indicated by the broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, secure panel **F** to panels **C & D** as shown using **Screw 3.5 X 16mm**.

STEP 5

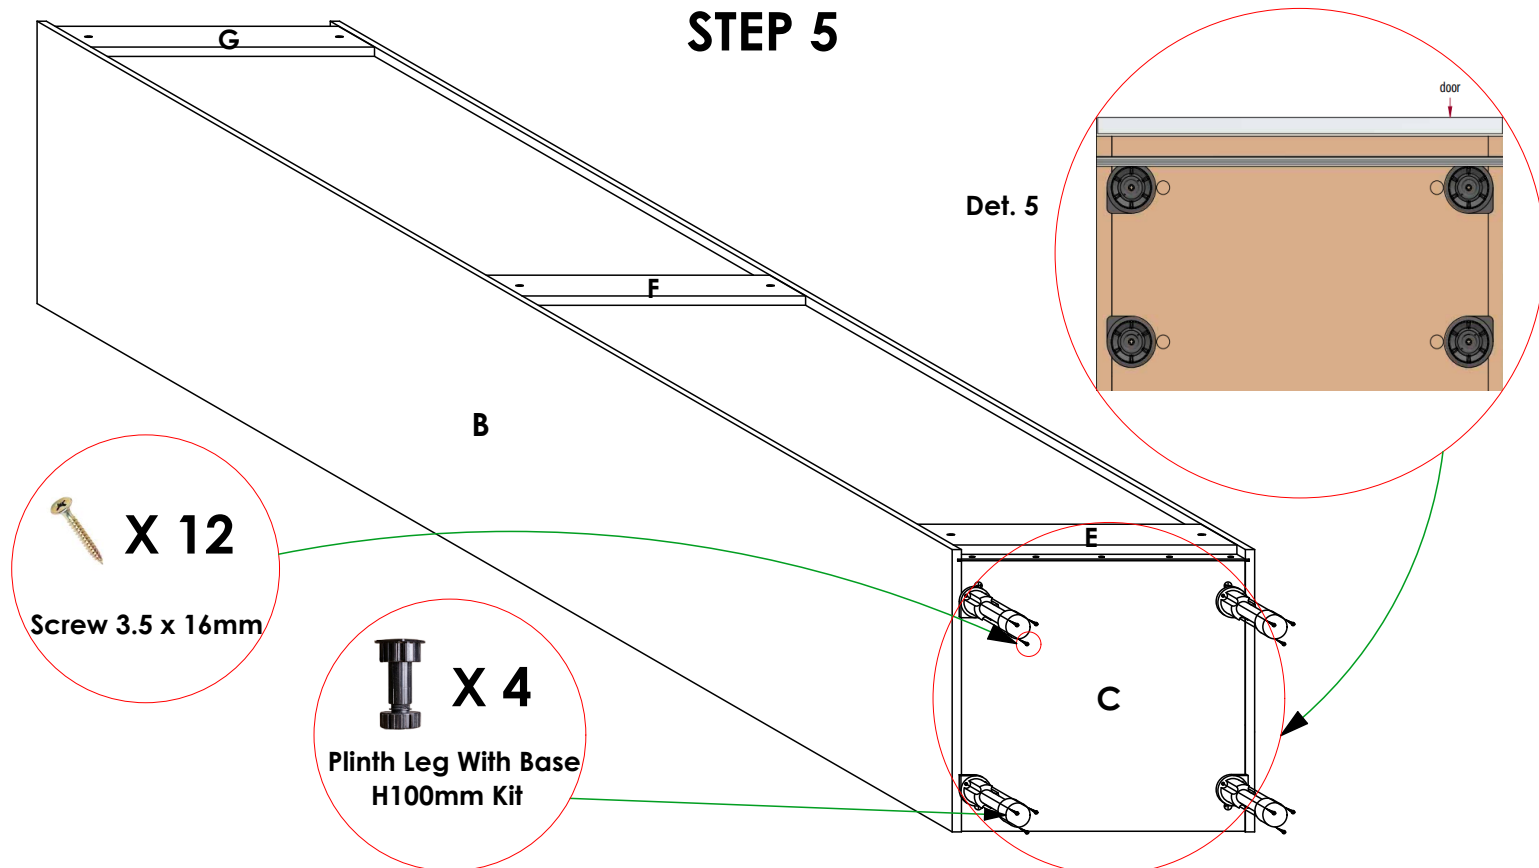


Place the four units of **Leg Adjustable Base 100mm** in the shown positions, aligning with the pre-drilled pilot holes on panel **C**. Ensure that the orientation is as shown in **Det. 5**. Using **Screw 3.5 X 16mm**, secure the legs onto panel **C**.

STEP 6

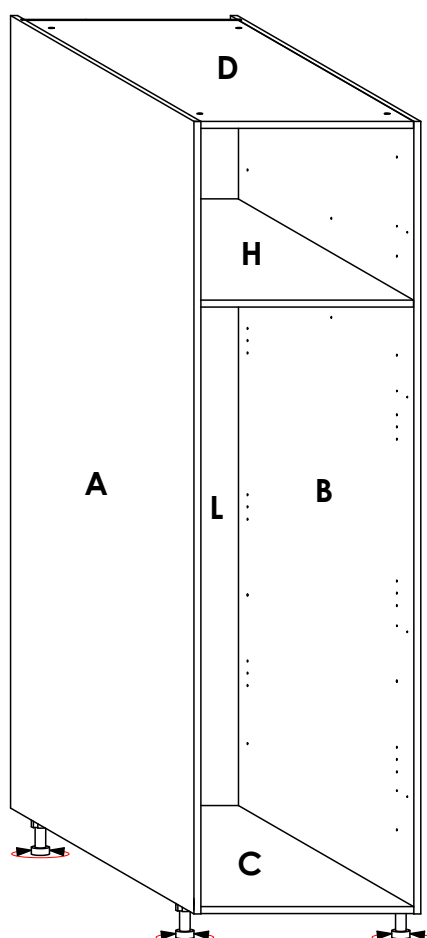


Flip the cabinet upright, place it in the desired position and adjust its height by rotating the base of the legs as shown to level.

STEP 7

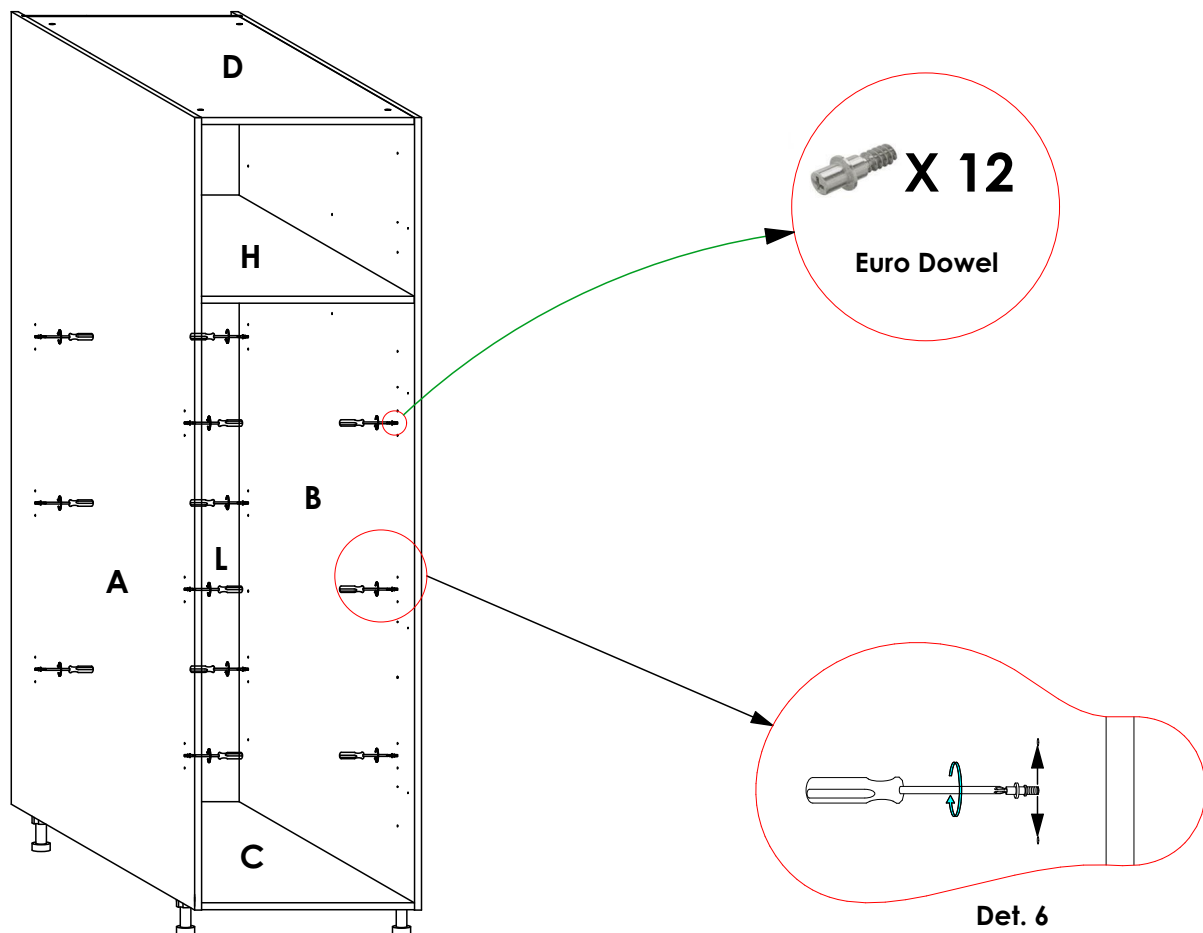

Screw in the **Euro Dowels** for flipper in the shown positions. Their positions can be adjusted as shown in **Det. 6** to change the level of the shelves or to slant the shelves.

STEP 8

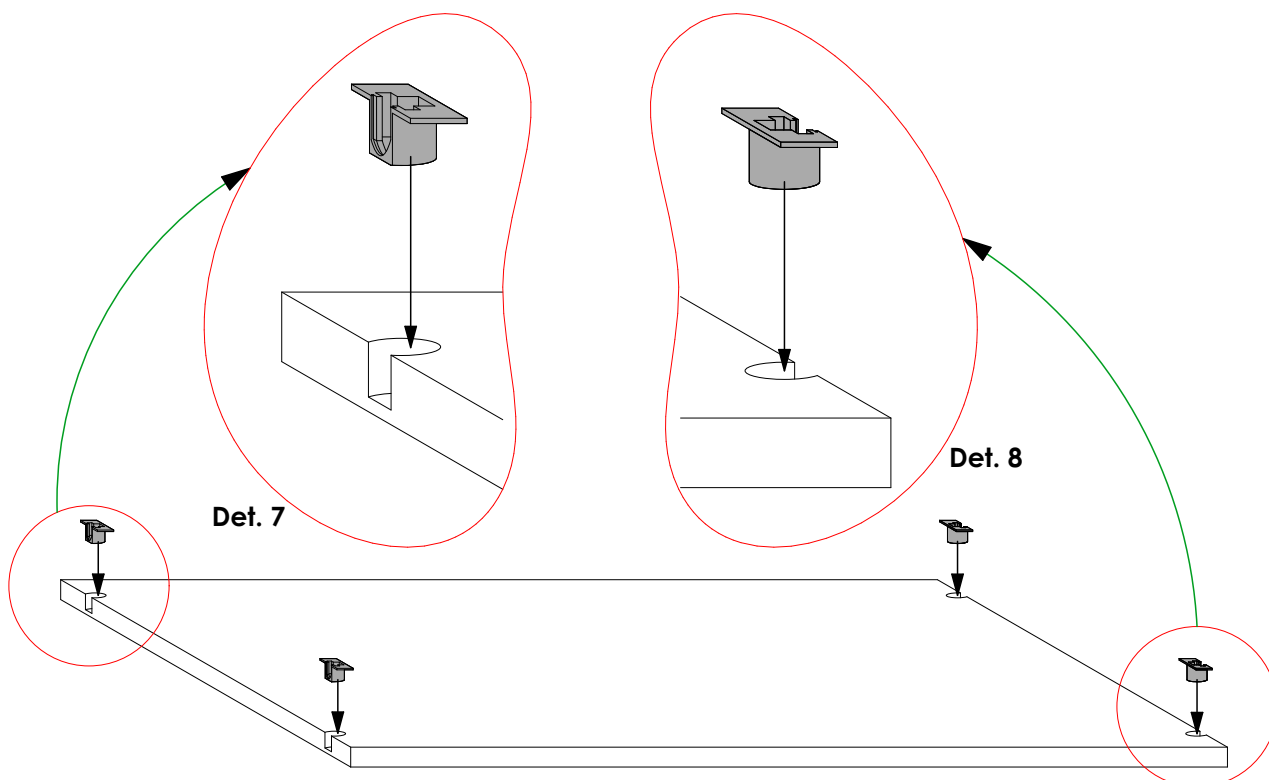

Insert the **shelf supports** for flipper in the shown positions on panles **I, J & K**. Confirm that the orientation is as shown in **Det. 7** and **Det. 8**.

STEP 9


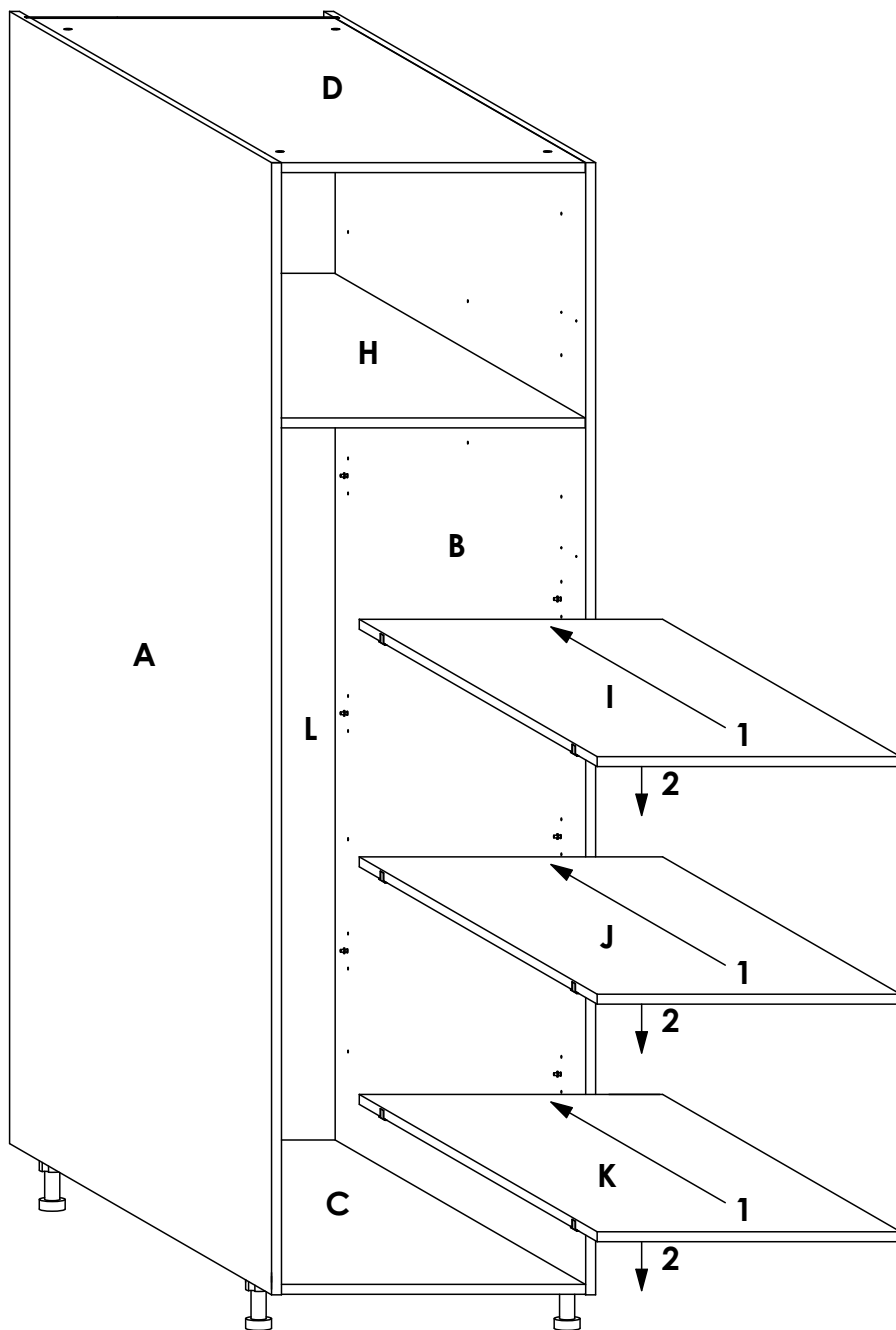



Fig. 1






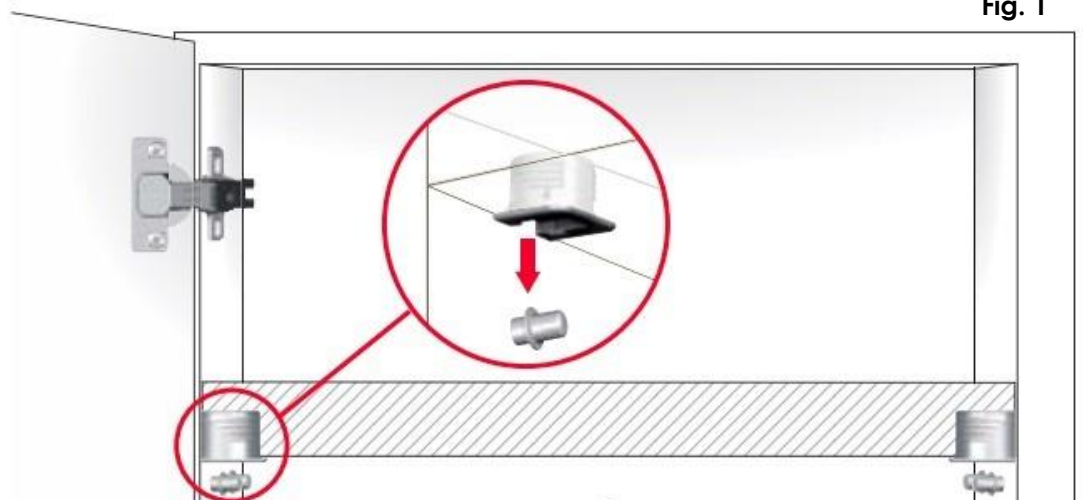


1. Slide in the shelves (Panels I, J & K) above the euro dowels as shown. Slide them in until they touch the back.
2. Press down the shelves lightly such that the euro dowels snap into the shelf supports. See **Fig. 1**.

See the Door Installation guide for further instructions.

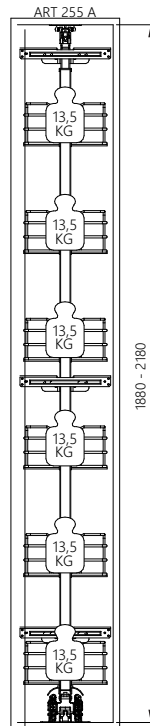PULL OUT TRAY - 300mm Tall ASSEMBLY GUIDE



HARDWARE

PRODUCT	QTY	IMAGE
Upper Frame(A)	1	
Lower Frame(B)	1	
Shallow Bottom Runner(C)	1	
Upper Runner(D)	1	
Door bracket(E)	1	
Door bracket frame(F)	1	
Fixing Support(G)	1	

GENERAL INSTRUCTIONS

Always read the full instructions prior to installation.

- Consider possible obstructions to your parts & accessories, like hinges inside the cabinet or adjacent cabinet doors and handles, prior to installation.
 - Make sure you leave plumbing and electrical work to qualified trades people. Never try this yourself.
 - Make sure you always use safety gear like a mask, ear muffs and glasses when using tools.
- **Tip:** After marking out the pre-drill holes as per the instructions, take the part that is to be installed and align the appropriate holes with the markings to ensure they match up prior to pre-drilling the holes.


TOOLS REQUIRED



Screw Driver
(Pozidriv Head)





Cordless Drill


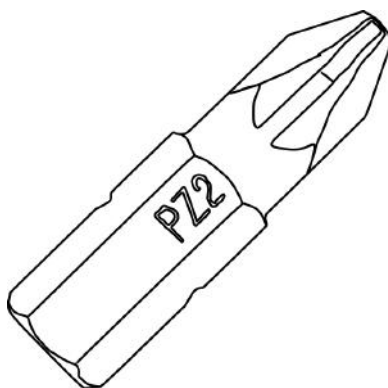


Pozi Bit (PZ2)


STEP 1: Set the shallow bottom runner C respecting the distances and with fix the screws provided.

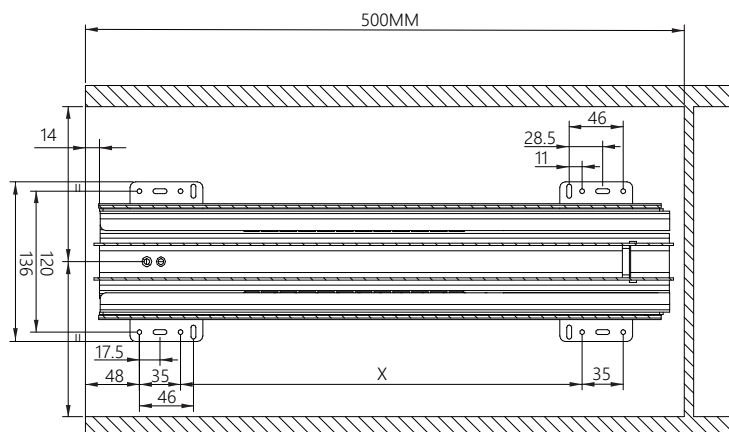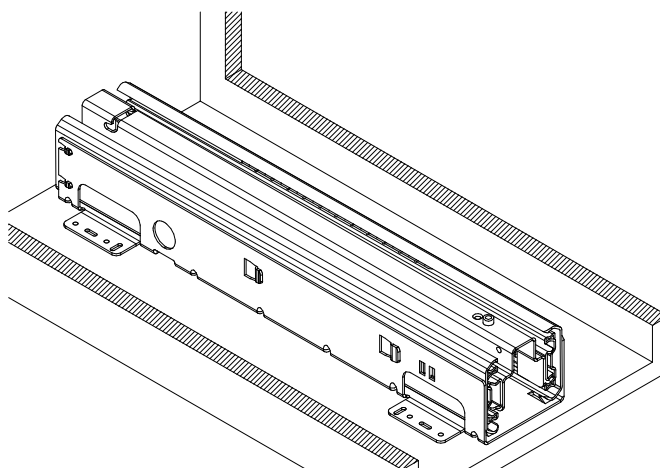


STEP 2: Set the upper runner D respecting the distances and fix with the screws provided.

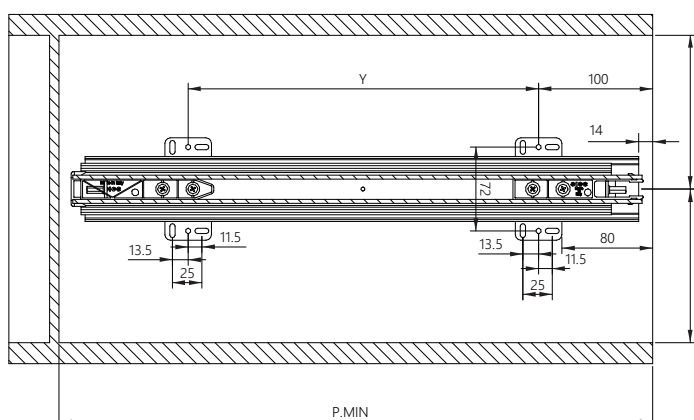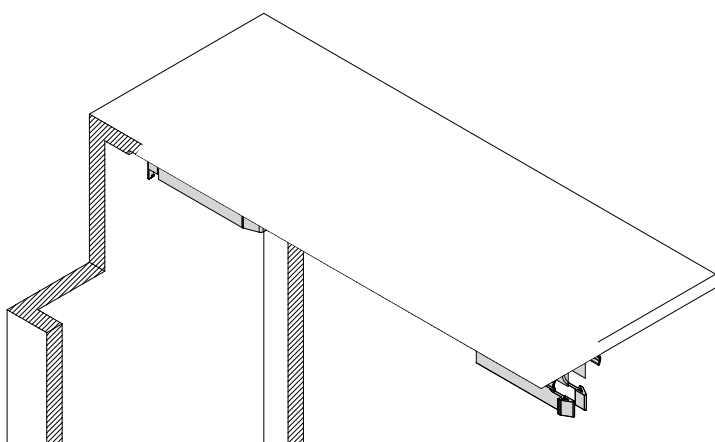


STEP 3: Fix the adjusting screws on the shallow bottom runner C (see the picture.)

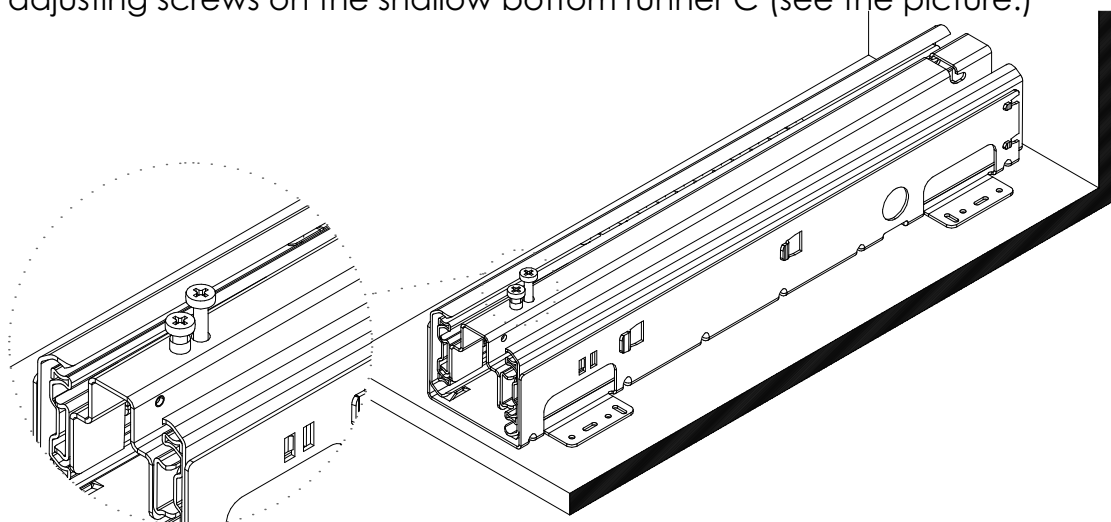


STEP 4: Fix the frame A in the shallow bottom runner C open and tighten the screws.
(see the picture 1)

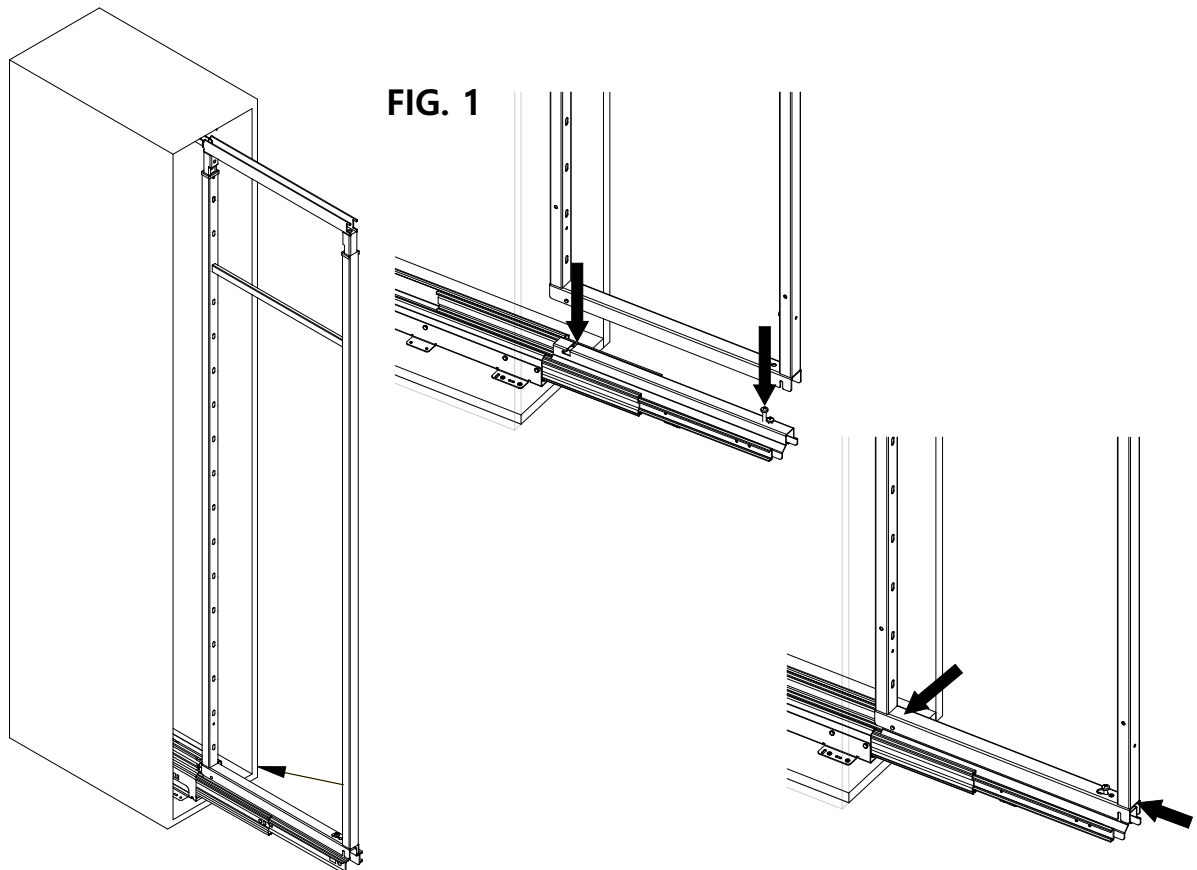


STEP 5: Loosen the grains "N" (on the frame A) and slide up the frame B. Block the frame B at the indicated measure by tightening the grains "N". Slide the frame A, B into the top slide D until "Click!" to install.

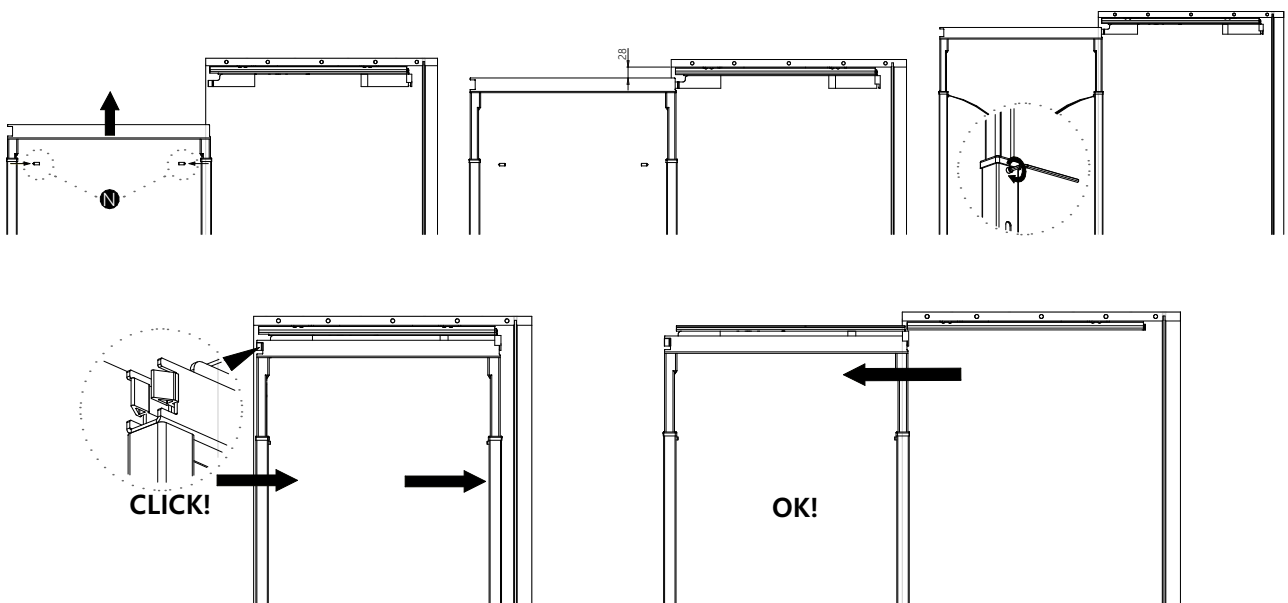



STEP 6: Set the special fixing support G in the frame hole A.(see the picture sequence.)

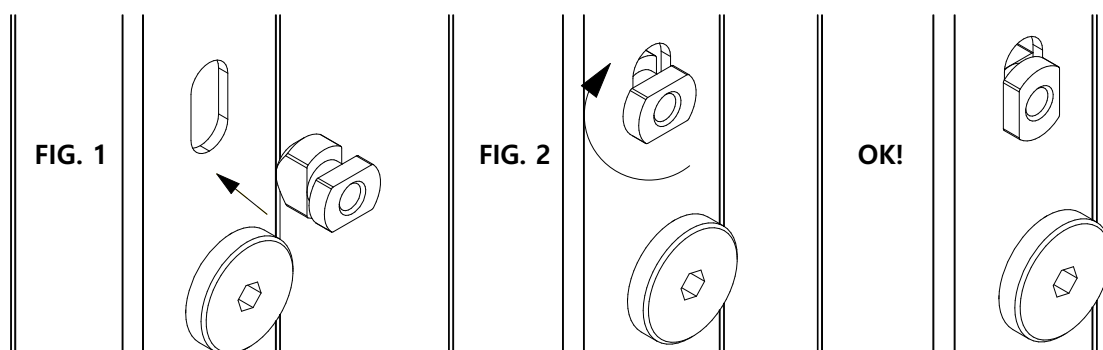


STEP 7: Set the door brackets frames F and fix with the special screw.

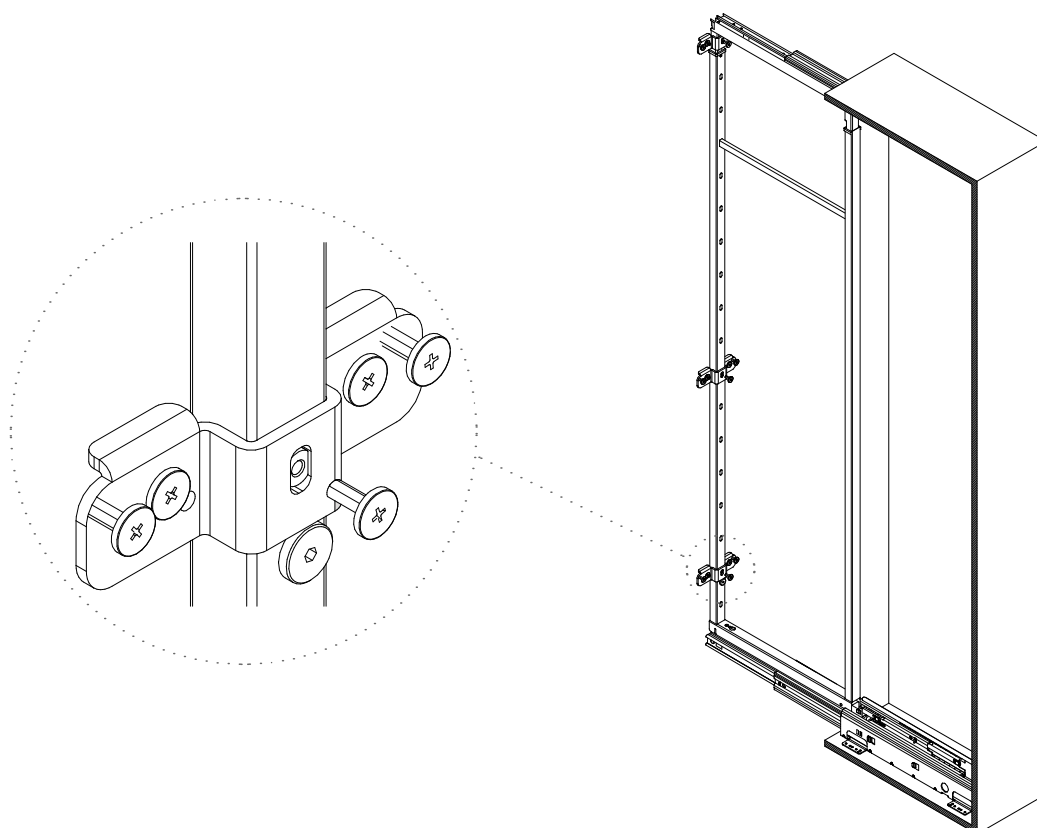



STEP 8: Assemble the door bracket E on the door respecting the distances and set it on the door bracket frame F, already assembled.

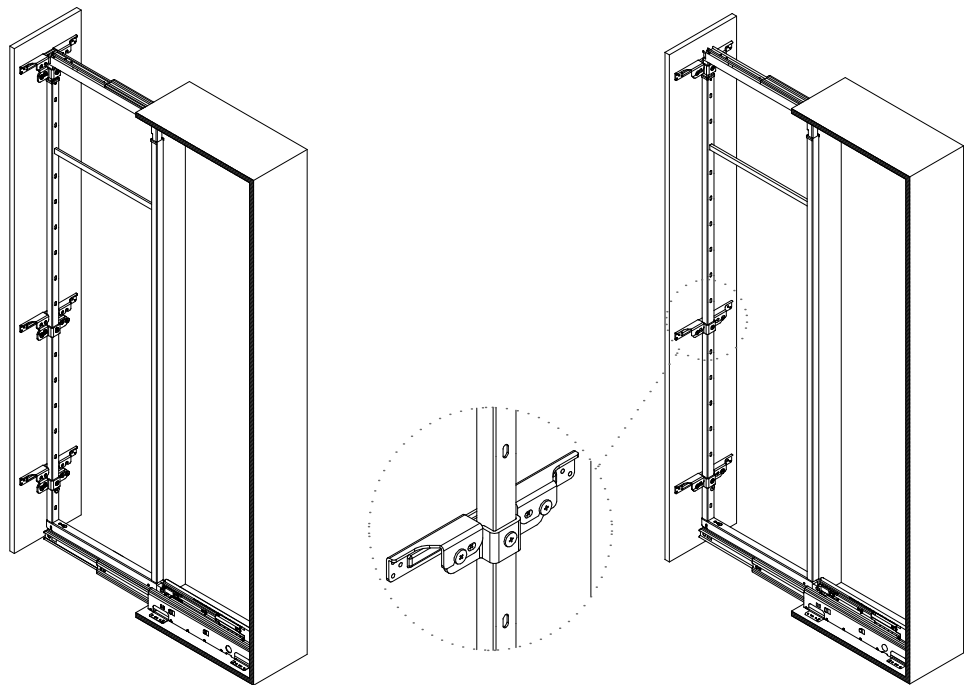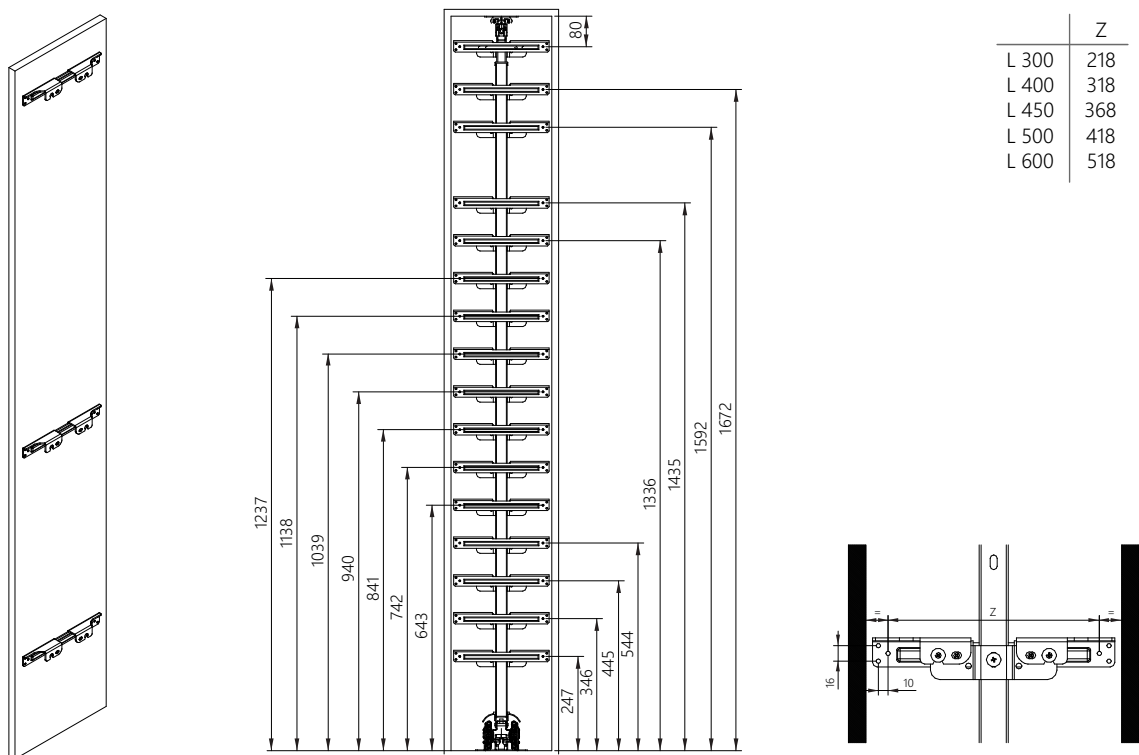

STEP 9: Go on adjusting the door.


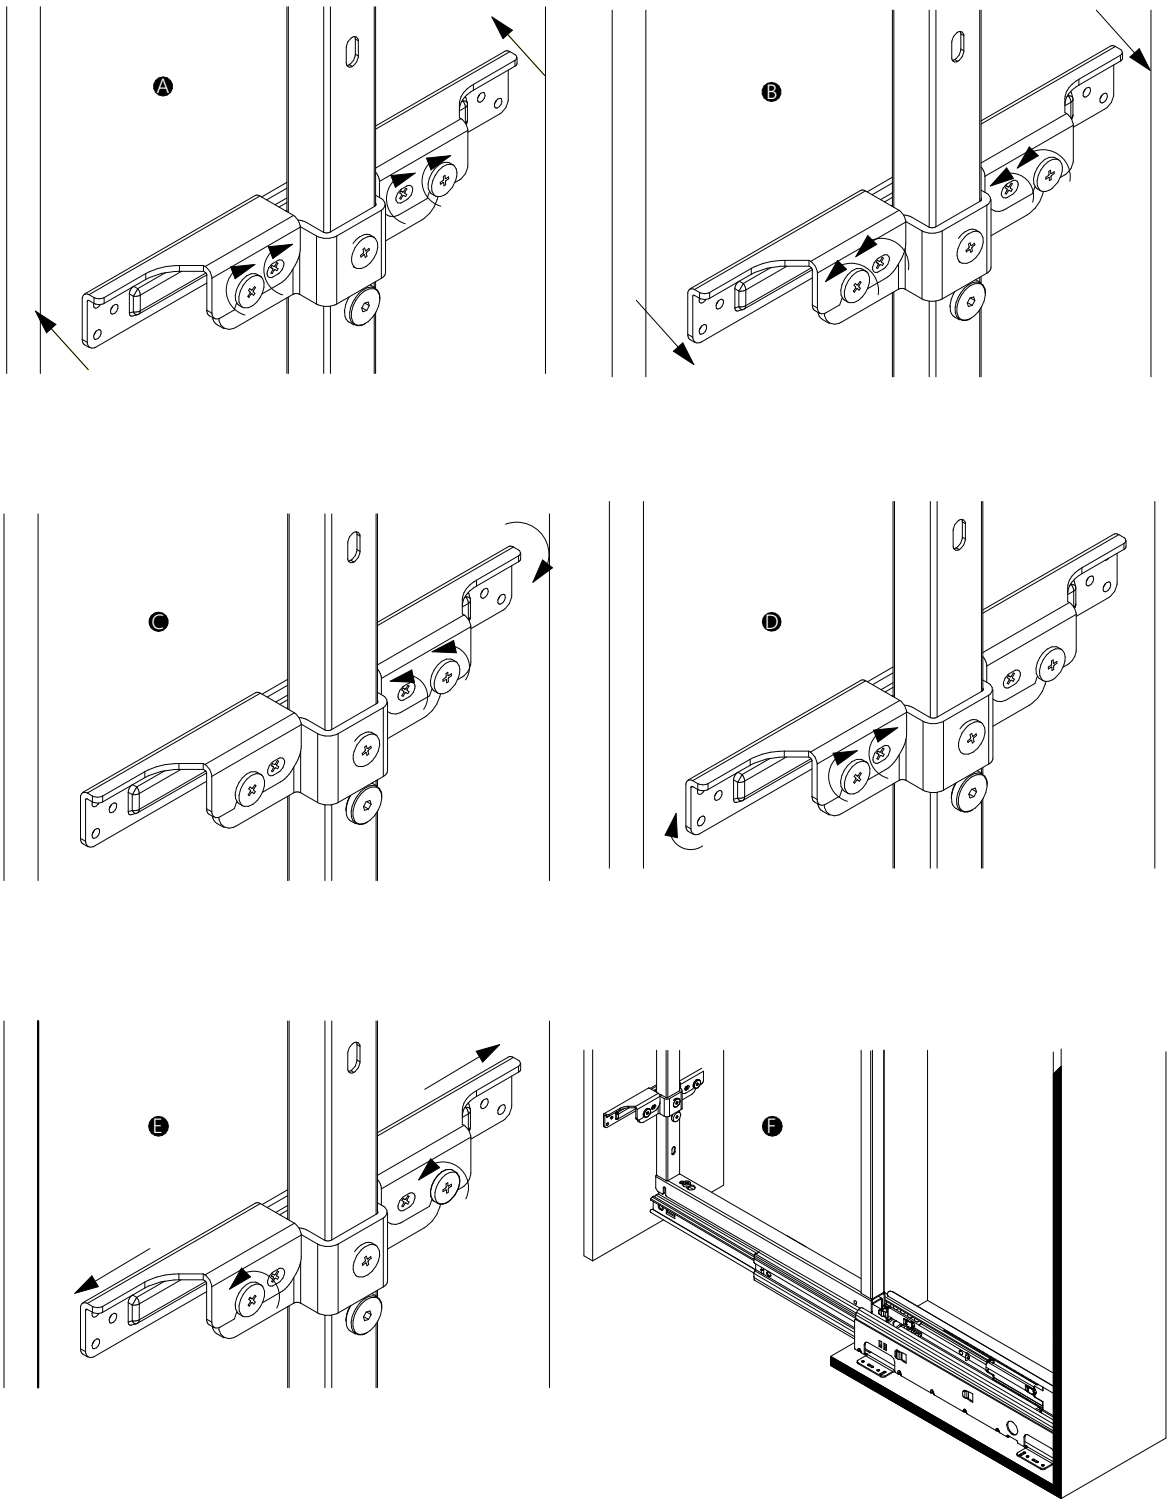


To make the regulation H loosen all the screws of the fixing support F and work on the eccentric situated in the lower part.

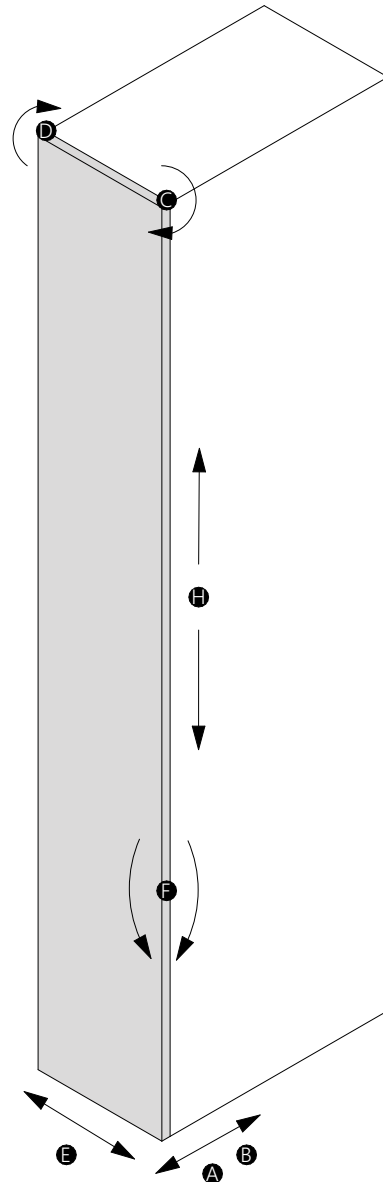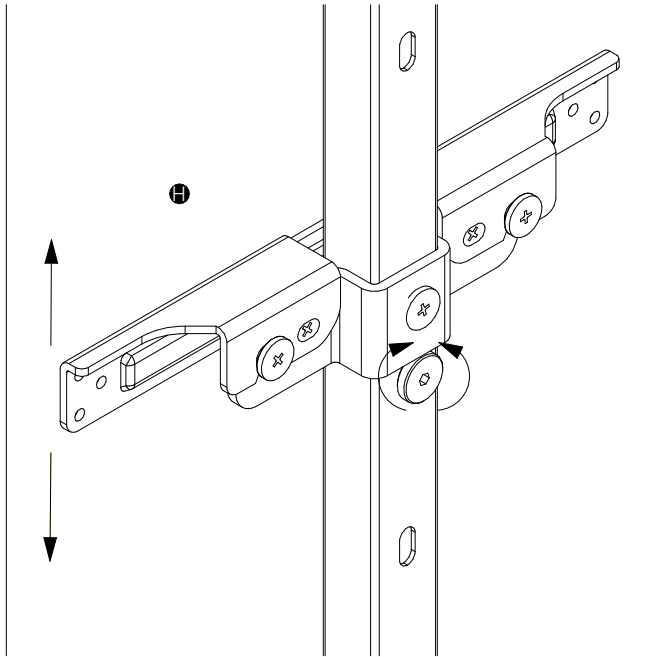

A-B: Ahead/Back
 C-D: Rotation
 E: Right/Left
 H: High/Low
 F: Regulation door inclination

STEP 10: Insert the cover on the slide.

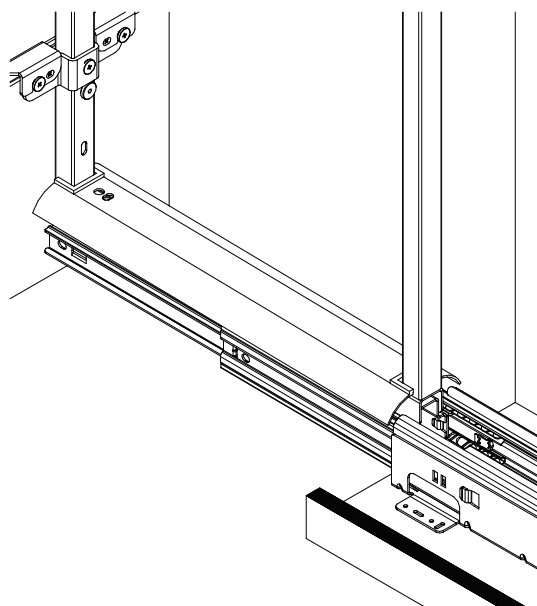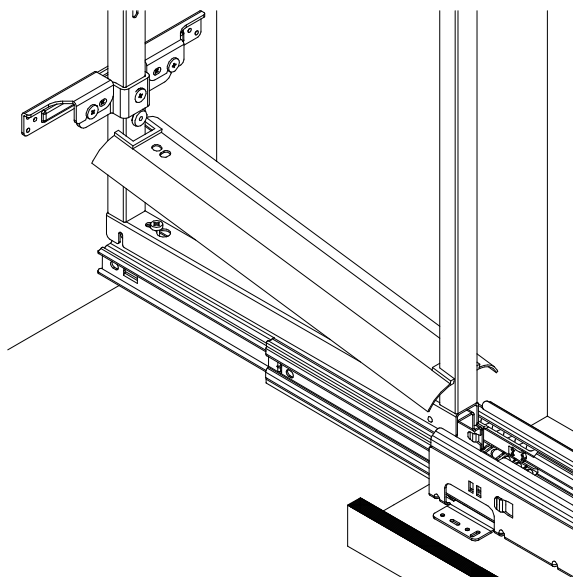

ASSEMBLY

