


#### HARDWARE

TOTAL NUMBER OF PANELS: 7


| PRODUCT                              | QTY | IMAGE  |
|--------------------------------------|-----|--------|
| Sys5 Quickfit TL2 Dowel 8 x 34       | 8   |        |
| Sys5 Cam 3000 15 x 14 mm             | 8   | (F)    |
| Wooden Dowel Titus 8 x 30 mm         | 16  |        |
| H Profile Backer Connector           | 1   |        |
| Screw 3.5 x 16mm                     | 10  | R Hand |
| APC 1 Wall Cabinet Hanger Kit        | 1   |        |
| Screw Nail in Anchor 8 x 80mm Yellow | 4   | 1      |
| Cabinet Connecting Screw Kit         | 4   |        |
| Shelf Support Flipper 14mm Kit       | 4   |        |

#### **TOOLS REQUIRED**

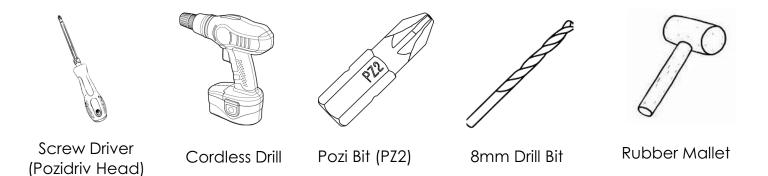

### **GENERAL INSTRUCTIONS**


- 1. Confirm that all panels (7) are in the package before assembling.
- 2. Check the white sticker on each panel for the labelling (A, B, C, D, E, F & G).
- 3. Ensure that the panels are laid on a non-abrasive surface when assembling.
- 4. Note that all panel connections are done using the system described below.

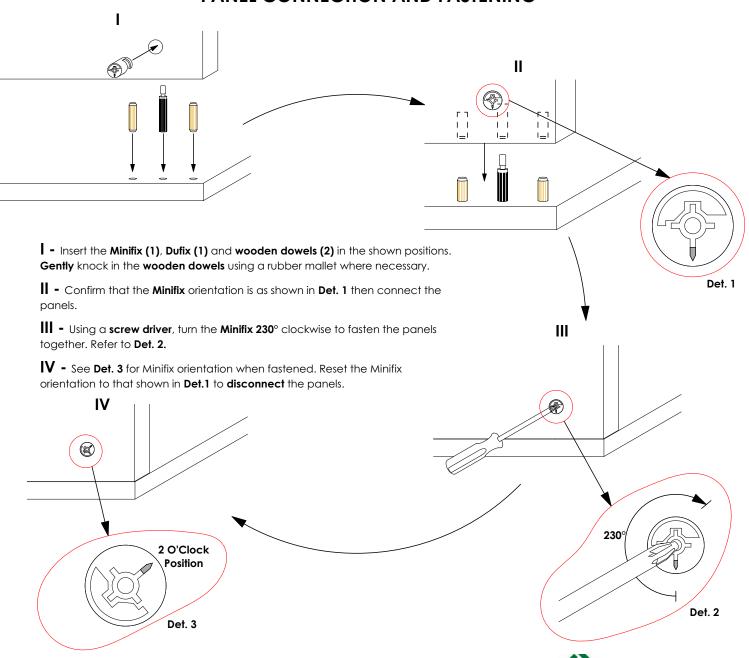

#### PANEL CONNECTION AND FASTENING


PG BISON

# PILOT HOLES KEY FOR SIDE PANELS

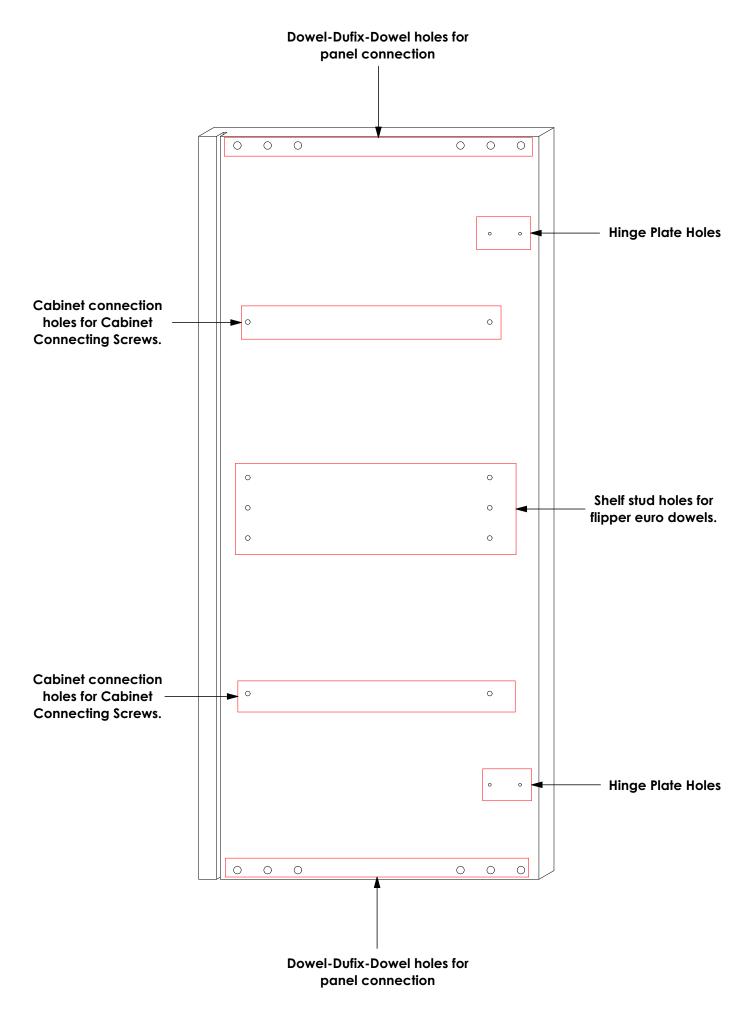




## **STEP 1**

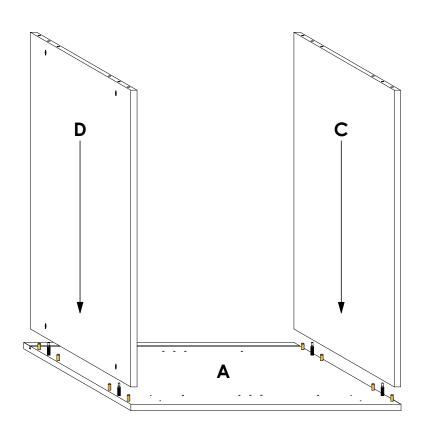


Connect panels **C & D** to panel **A** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

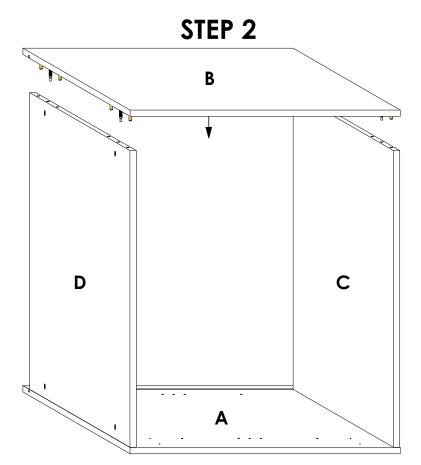


Connect panel **B** to panels **C & D** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.



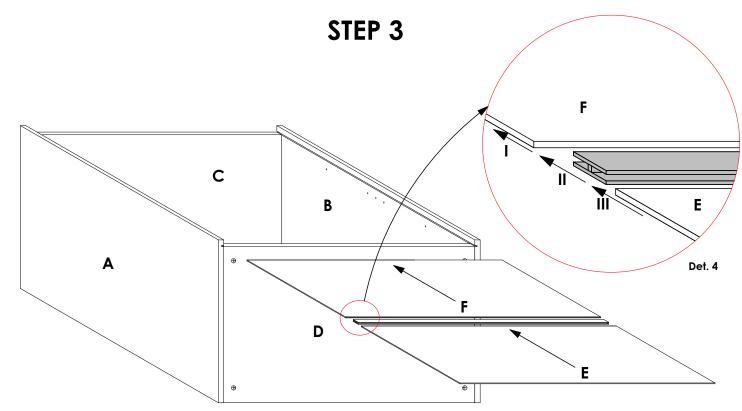


Slide 3mm panel F into the groove on panels A & B with the finished side facing inside the cabinet. After, insert the H Profile Backer Connector into panel H as shown (See Det. 4). To finish this step, slide 3mm panel F through the groove on panels A & B and into the H Profile Backer Connector as shown in Det. 4.

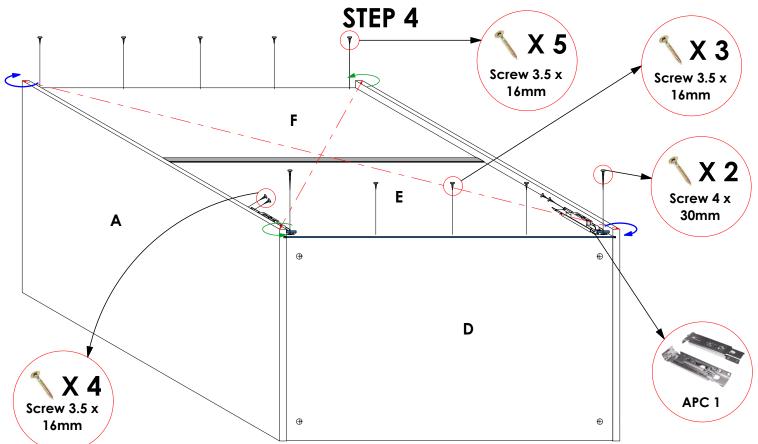


First, check the diagonal of the cabinet by measuring the two distances indicated by the red, broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, place the APC 1 hangers in the shown positions ensuring that the shaded areas are flush with each other. Then, secure panel F to panel C using Screw 3.5 X 16mm (5) and to panel E, through the APC 1 hangers, using Screw 4 X 30mm (2). Reinforce the APC 1 hangers and panel F in the shown positions using Screw 3.5 X 16mm.



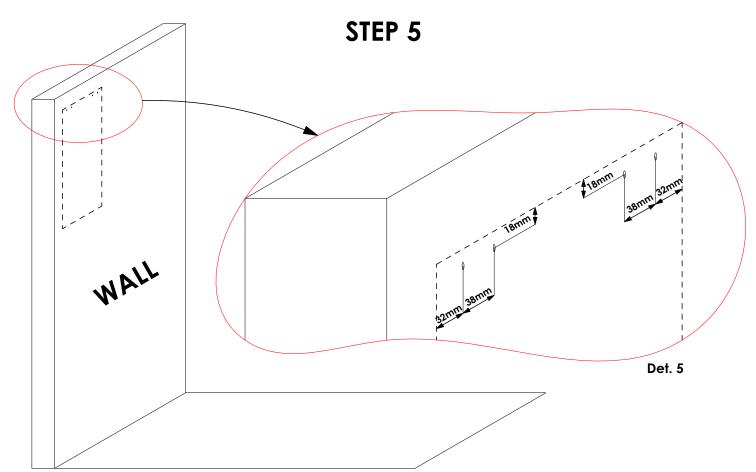


The **broken lines** indicate the **outer boundaries** of the **wall cabinet**. Mark the drill points on the wall with respect to the hanging position of the wall cabinet. Refer to **Det. 5** for dimensions. Then, using an **8mm** Drill Bit, drill **80mm deep** holes through the marked positions on the wall ensuring that the **drill bit** is **perpendicular** to the **wall surface**.

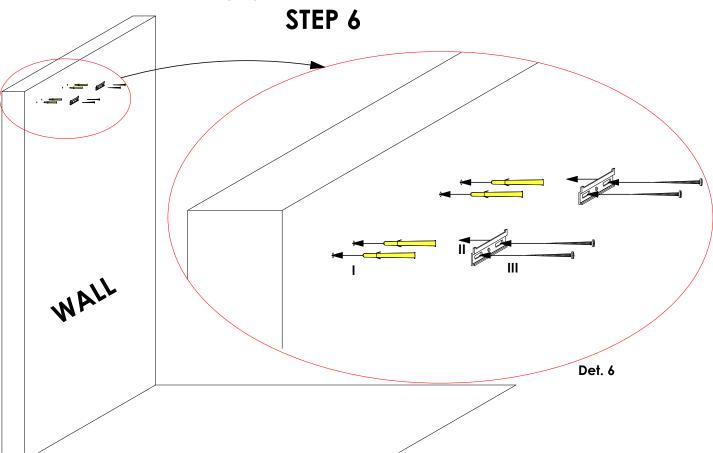


I) Separate the **yellow plug** from the **nail in anchor** and, using a **rubber mallet**, **gently** knock in the plug into the holes drilled in **Step 5**.

II) Place the APC 1 wall plates on the wall. Align the oval holes on the wall plate with the plugs.III) Screw the nail in anchor into the yellow plug.




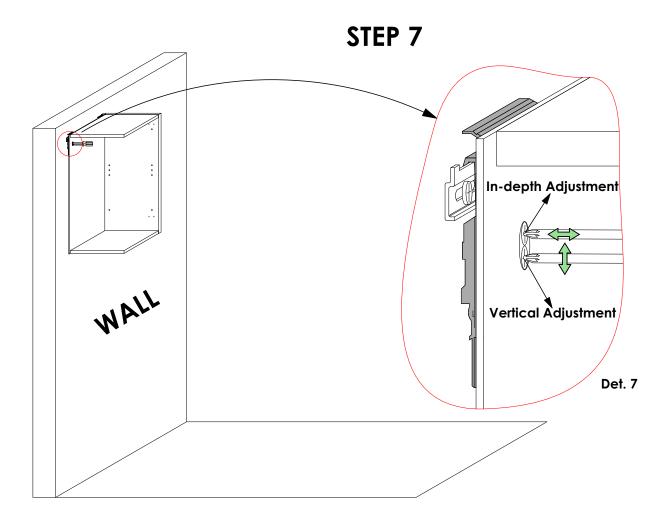


Hang the wall cabinet on the wall by hooking the APC 1 Hangers onto the APC 1 wall plates. See **Det. 7**. Also see **Det. 7** for **adjustment** details.

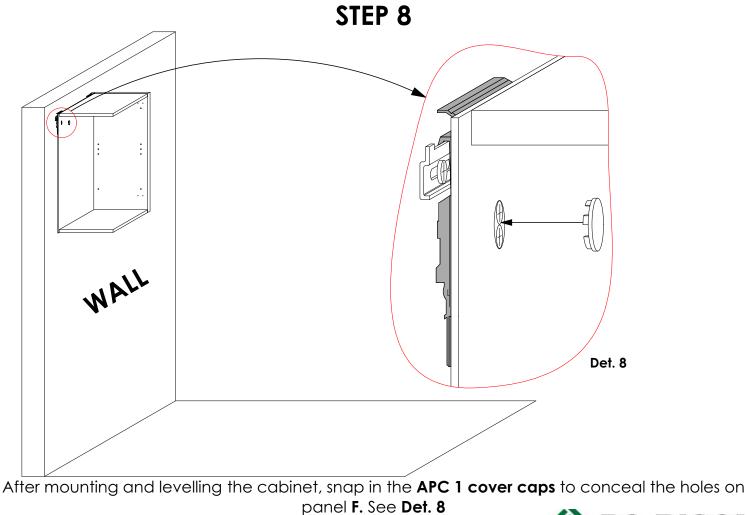



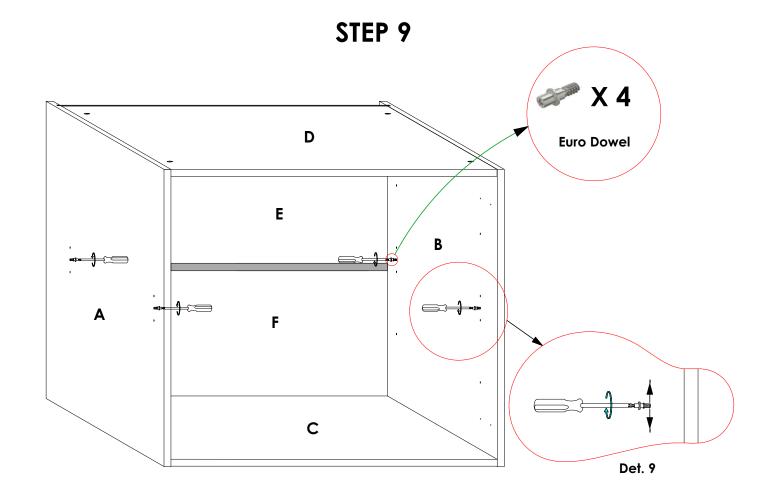


Screw in the **Euro Dowels** for flipper in the shown positions. Their positions can be adjusted as shown in **Det. 9** to change the level of the shelves or to slant the shelves.

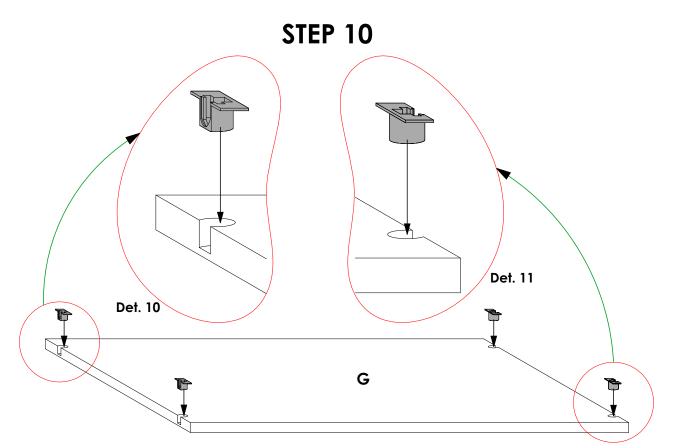


Insert the **shelf supports** for flipper in the shown positions. Confirm that the orientation is as shown in **Det. 10** and **Det. 11**.



STEP 11

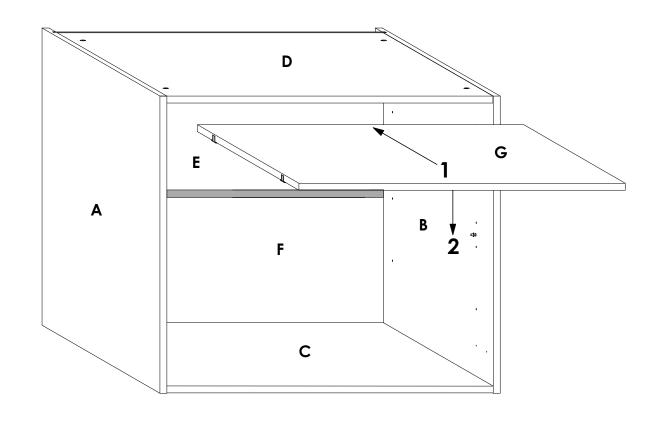

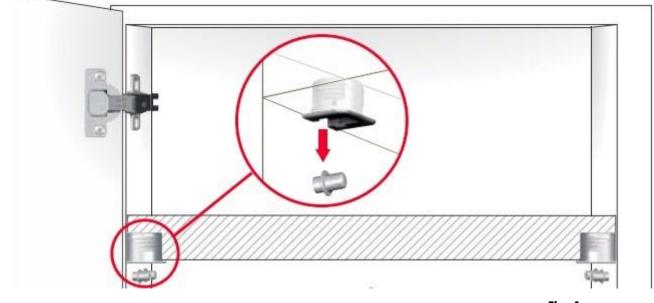



Slide in the shelf (Panel G) above the euro dowels as shown. Slide it in until it touches the back.
Press down the shelf lightly such that the euro dowels snap into the shelf supports. See Fig. 1.

See the Door Installation guide for further instructions.

