


ALULINE QUICKLOC FLATPAX KITCHEN RANGE ASSEMBLY GUIDE WALL CABINET 450mm

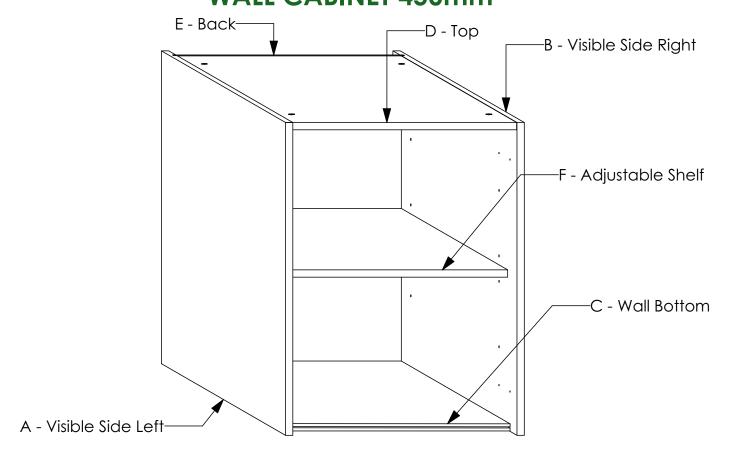


TOTAL NUMBER OF PANELS: 6

HARDWARE


PRODUCT	QTY	IMAGE
Sys5 Quickfit TL2 Dowel 8 x 34	8	
Sys5 Cam 3000 15 x 14 mm	8	(C
Wooden Dowel Titus 8 x 30 mm	16	
Screw 3.5 x 16mm	8	*
APC 1 Wall Cabinet Hanger Kit	1	
Screw Nail in Anchor 8 x 80mm Yellow	4	111
Cabinet Connecting Screw Kit	4	
Shelf Support Flipper 14mm Kit	4	7

TOOLS REQUIRED

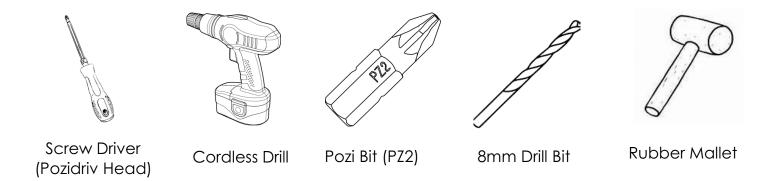


GENERAL INSTRUCTIONS

- 1. Confirm that all panels (6) are in the package before assembling.
- 2. Check the white sticker on each panel for the labelling (A, B, C, D, E & F).
- 3. Ensure that the panels are laid on a non-abrasive surface when assembling.
- 4. Note that all panel connections are done using the system described below.

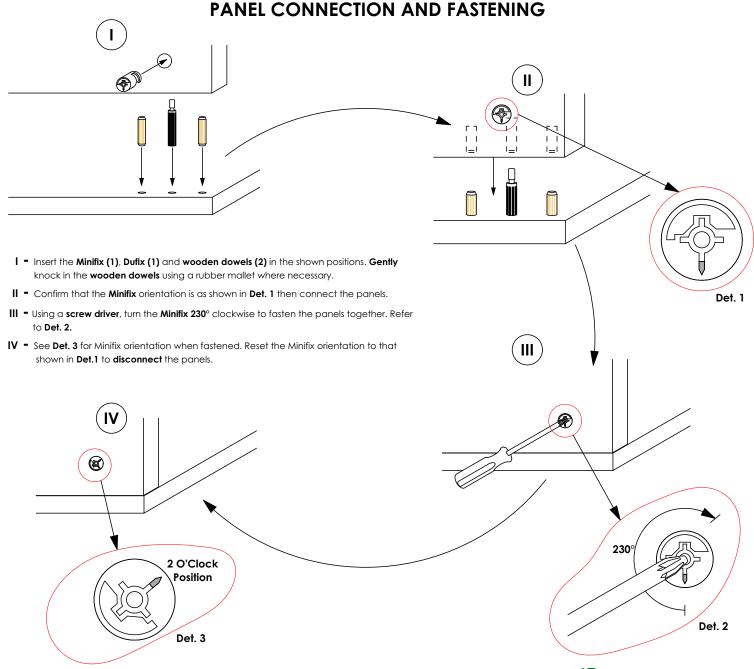


PILOT HOLES GUIDE FOR SIDE PANELS

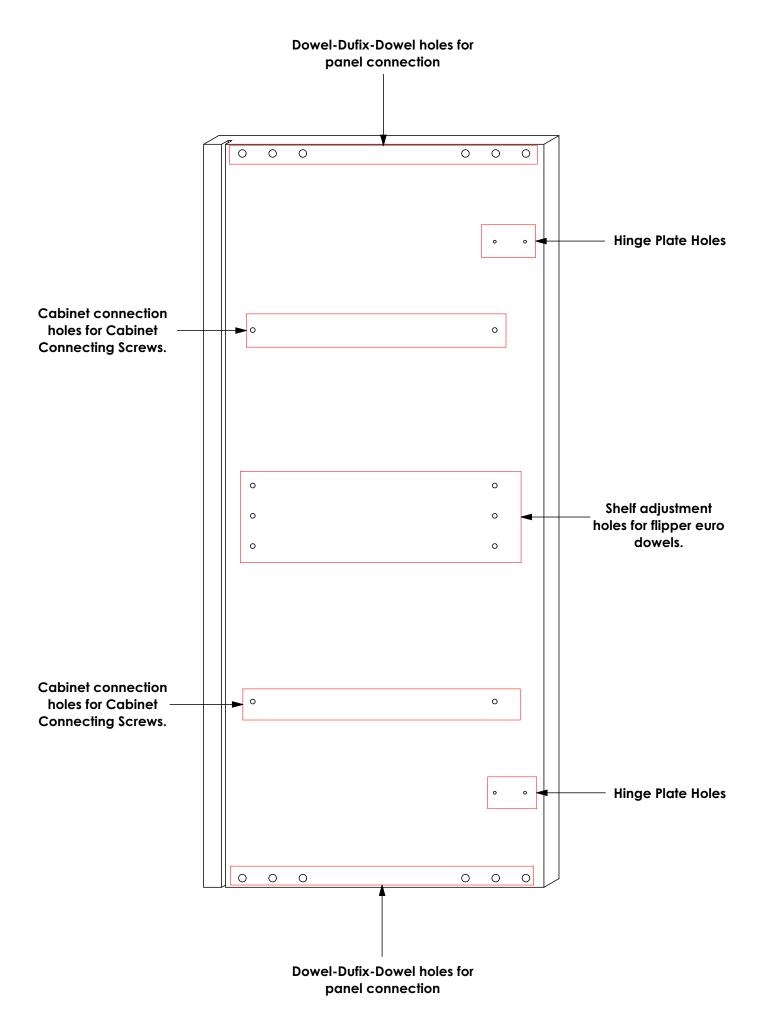





STEP 1

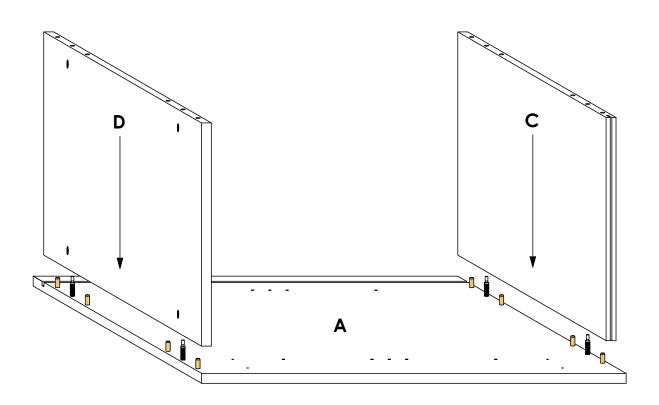


Connect panels **C & D** to panel **A** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

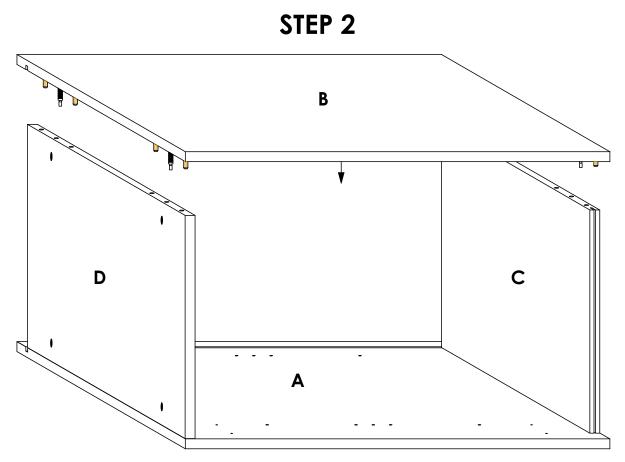


Connect panel **B** to panels **C & D** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

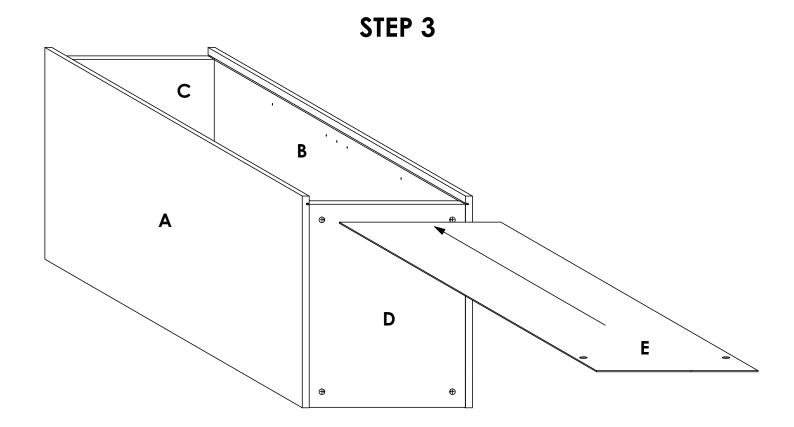


Slide **3mm** panel **E** through the grooves on panels **A & B** as shown. Refer to the holes and/or grooves on the diagram to determine the panel orientation.

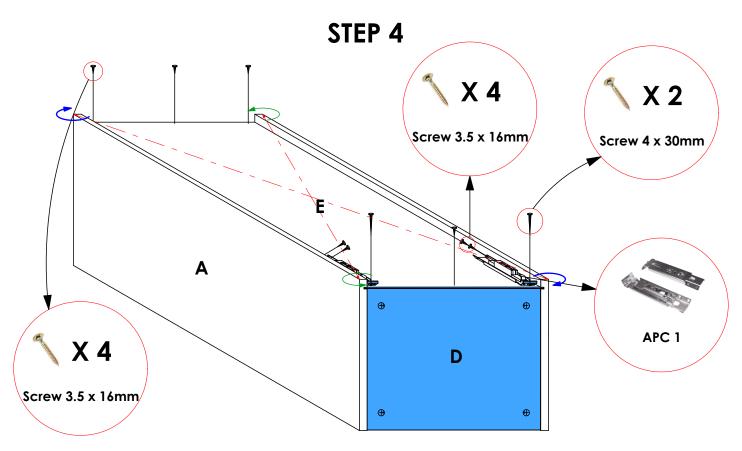

First, **check the diagonal** of the cabinet by measuring the two distances indicated by the red, broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, place the **APC 1** hangers in the shown positions ensuring that the shaded areas are flush with each other. Then, secure panel **E** to panel **C** using **Screw 3.5 X 16mm** and to panel **D**, **through the APC 1** hangers, using **Screw 4 X 30mm**. Reinforce the **APC 1** hangers in the shown positions using **Screw 3.5 X 16mm**.

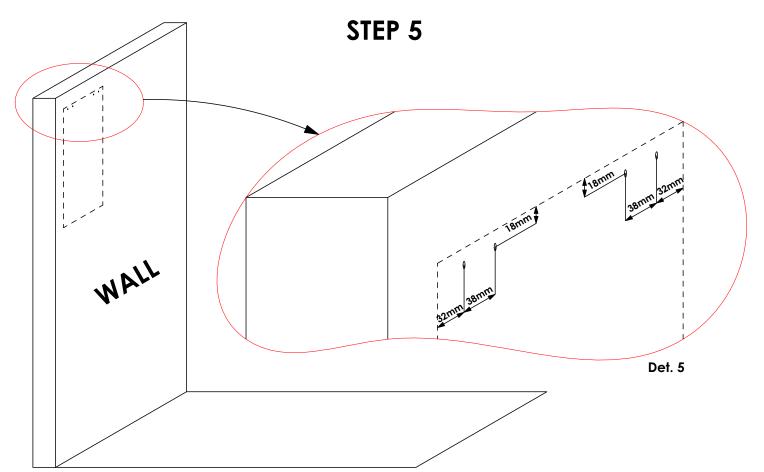


The **broken lines** indicate the **outer boundaries** of the **wall cabinet**. Mark the drill points on the wall with respect to the hanging position of the wall cabinet. Refer to **Det. 5** for dimensions. Then, using an **8mm** Drill Bit, drill **80mm deep** holes through the marked positions on the wall ensuring that the **drill bit** is **perpendicular** to the **wall surface**.

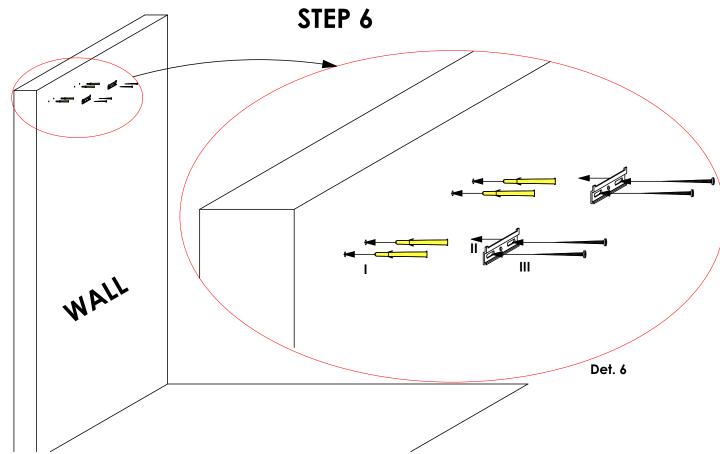


I) Separate the yellow plug from the nail in anchor and, using a rubber mallet, gently knock in the plug into the holes drilled in **Step 5**.

II) Place the APC 1 wall plates on the wall. Align the oval holes on the wall plate with the plugs.

III) Screw the nail in anchor into the yellow plug.

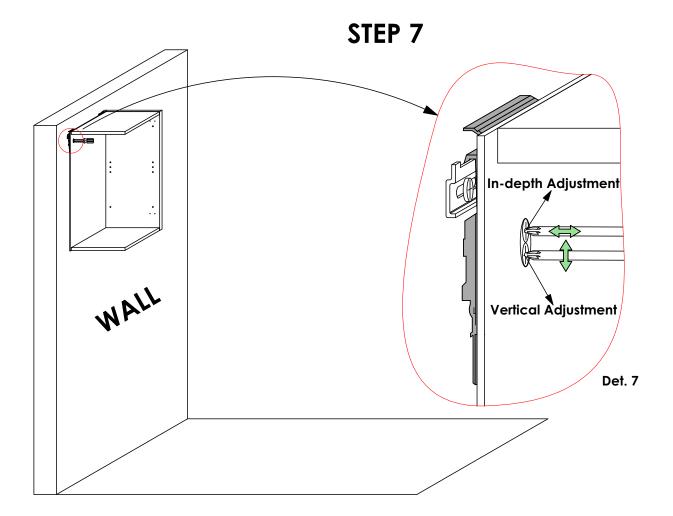


Hang the wall cabinet on the wall by hooking the APC 1 Hangers onto the APC 1 wall plates. See **Det. 7**. Also see **Det. 7** for **adjustment** details.

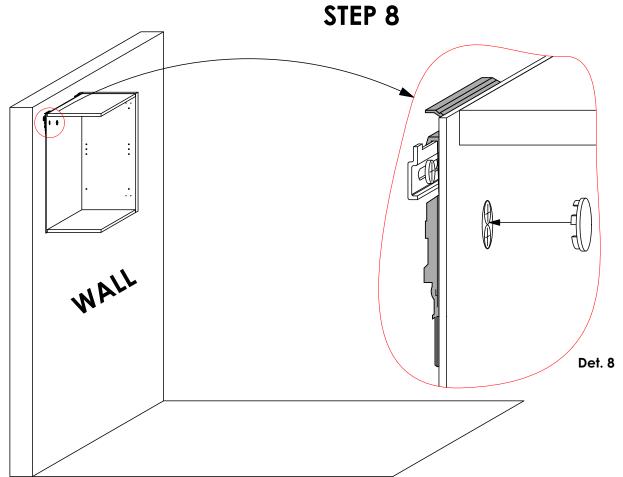


After mounting and levelling the cabinet, snap in the APC 1 cover caps to conceal the holes on panel F. See Det. 8

PG BISON

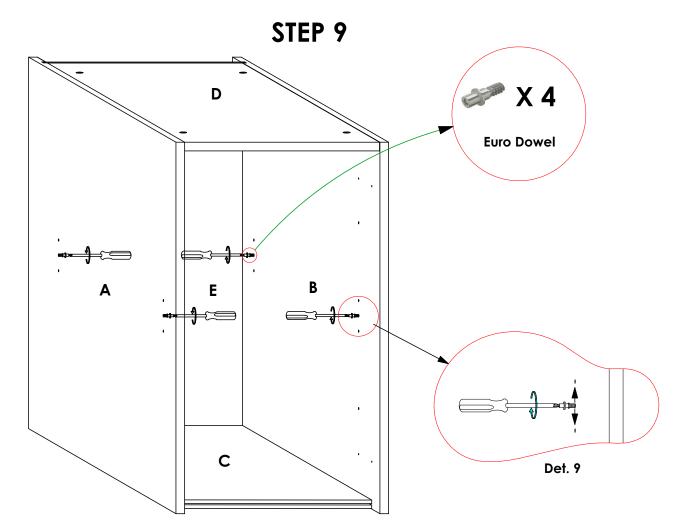



Screw in the **Euro Dowels** in the shown positions. Their positions can be adjusted as shown in **Det. 9** to change the level of the shelves or to slant the shelves.

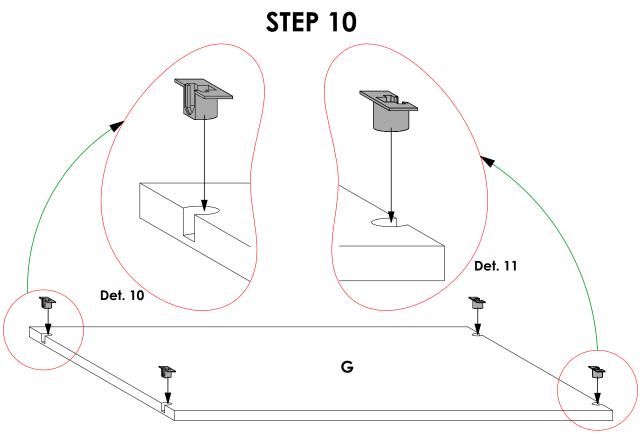

Insert the **shelf supports** in the shown positions. Confirm that the orientation is as shown in **Det. 10** and **Det. 11**.

STEP 11

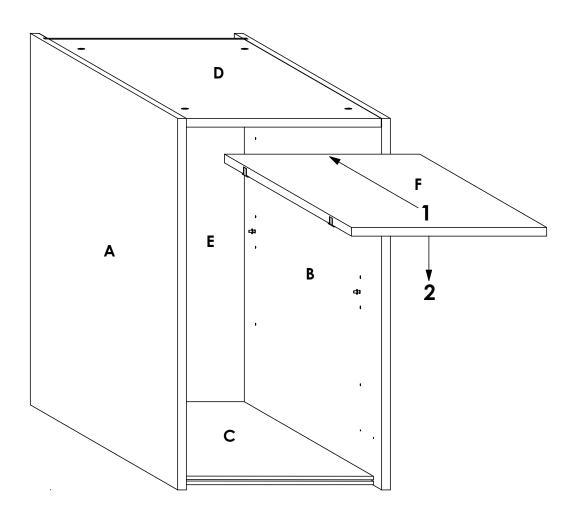


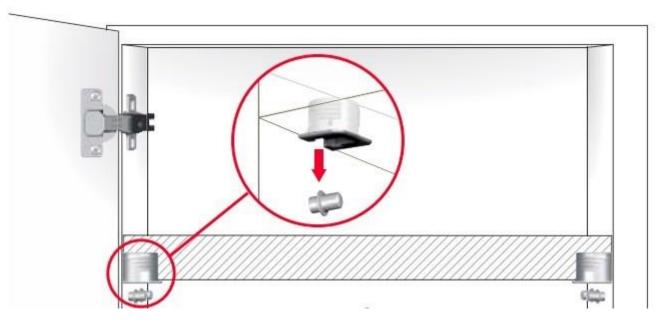

- Fig. 1
- 1. Slide in the shelf (Panel F) above the euro dowels as shown. Slide it in until it touches the back.
- 2. Press down the shelf lightly such that the euro dowels snap into the shelf supports. See Fig. 1.

See the Door Installation guide for further instructions.

STEP 12 (WALL GOLA PROFILE INSTALLATION)

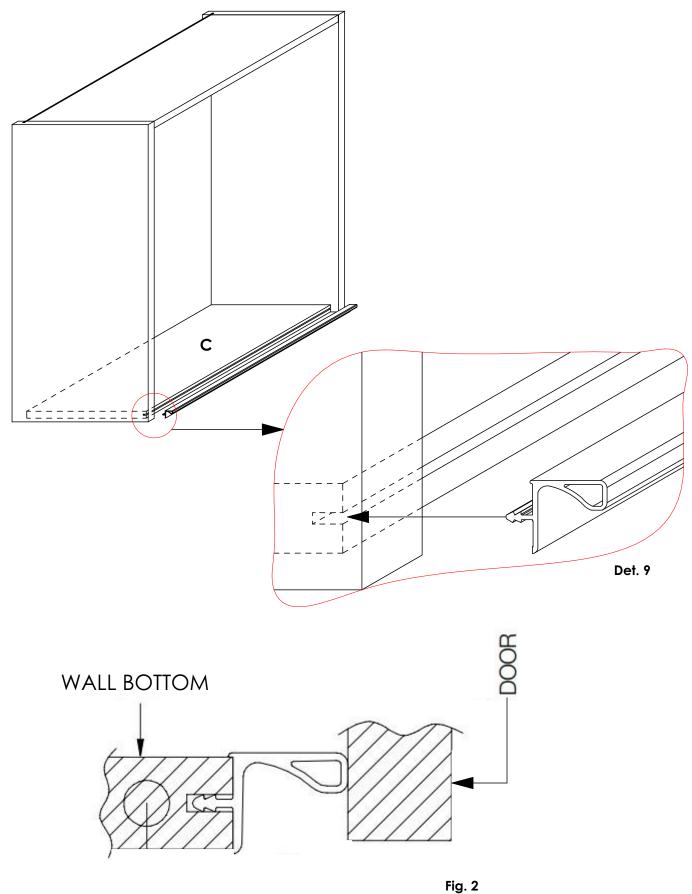

Knock in the provided Wall Gola Profile in the shown position on panel **C**. See **Det. 9 and Fig. 2**.