


## EDGLINE SCREWLOC FLATPAX KITCHEN RANGE ASSEMBLY GUIDE TALL CORNER CABINET RIGHT HINGE OPENING 1050mm

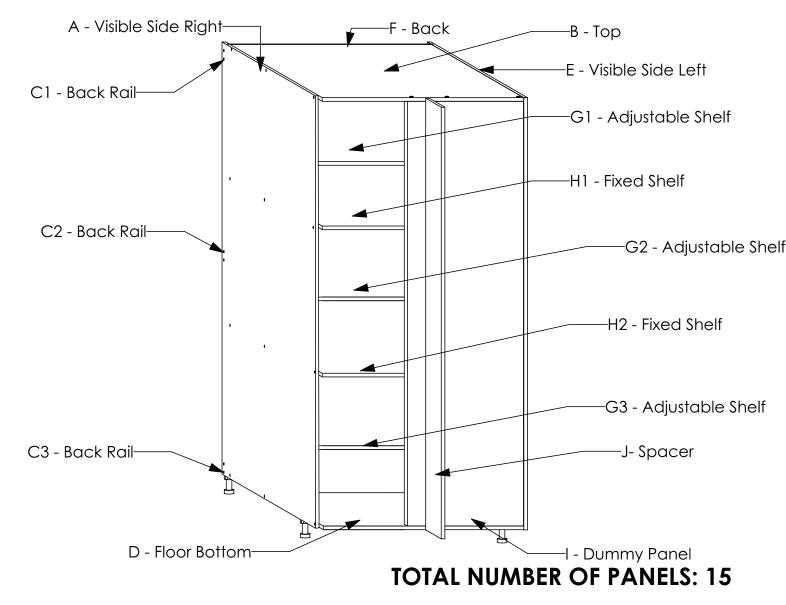

### HARDWARE

PRODUCT	QTY	IMAGE
Screw 4.0 x 50mm	45	8 manutation
Screw 3.5 x 16mm	25	K MAR
Plinth Leg With Base H100mm Kit	5	
Shelf Studs	12	

# **GENERAL INSTRUCTIONS**

1. Confirm that all panels (15) are in the package before assembling.

2. Check the white sticker on each panel for the labelling (A, B, C1, C2,

C3, D, E, F, G1, G2, G3, H1, H2,I & J).

3. Ensure that the panels are laid on a non-abrasive surface when assembling.

4. Countersink the holes on the side panels before inserting the screws.

5. Ensure that the screw is perpendicular to the surface being drilled for a clean and strong joint.


# TOOLS REQUIRED



Screw Driver (Pozidriv Head)




Cordless Drill




Pozi Bit (PZ2)



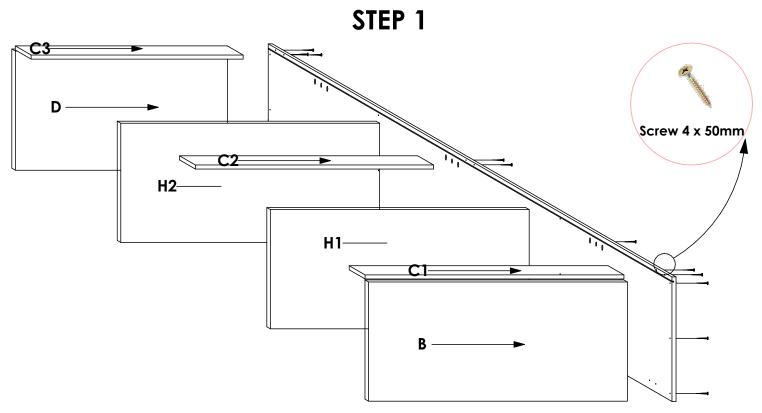

Connect panels B, C1, H, C2, C3 & D to panel A using Screw 4.0 X 50mm in the pre-drilled pilot holes as shown. Refer to Det 1 - 4 below before fastening the screws.

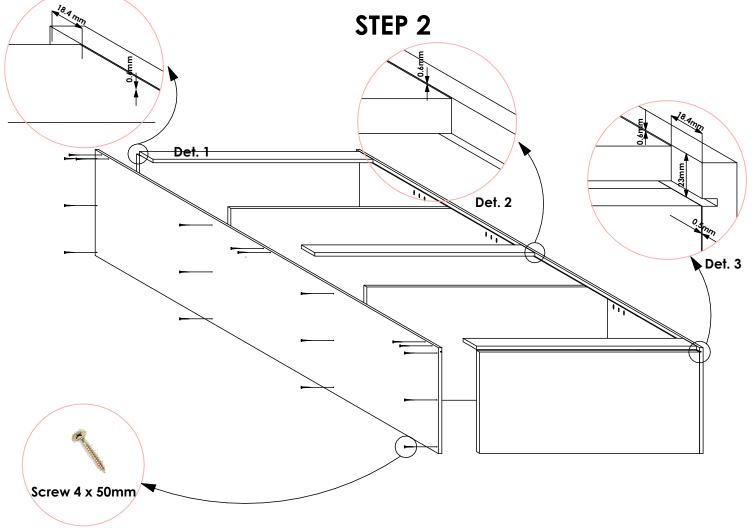


Det. 4


Connect panel **E** to panels **B**, **C1**, **H**, **C2**, **C3** & **D** using **Screw 4.0** X **50mm** in the pre-drilled pilot holes as shown. Ensure that the **symmetry** between panel **E** and panel **A** is maintained. Refer to



3

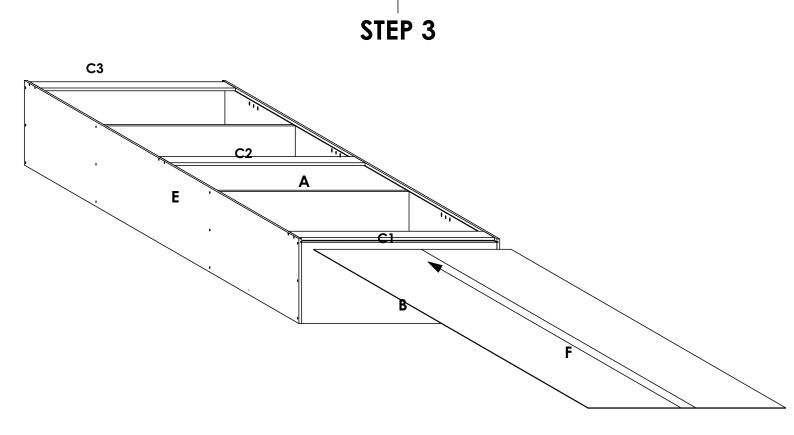


Slide the 3mm panel (F) into the groove on panels A & E with the finished side facing down.

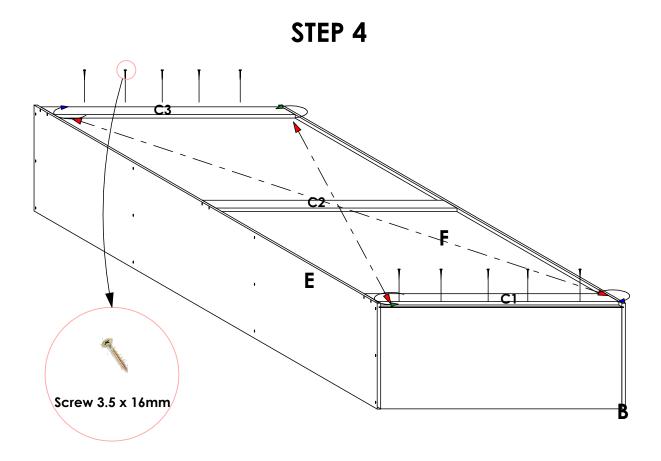


First, **check the diagonal** of the cabinet by measuring the two distances indicated by the red, broken lines. They should be equal. If not, twist the cabinet accordingly in the diagonal corners as shown until an equal value is achieved. After, secure panel **F** to panels **B & D** as shown using **Screw 3.5 X 16mm**.



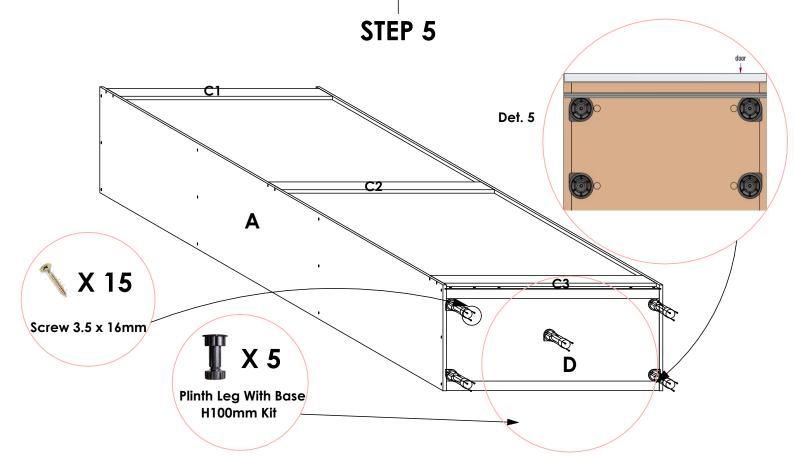


Flip the cabinet up-side down as shown. Place the four units of **Leg Adjustable Base 100mm** in the shown positions, aligning with the pre-drilled pilot holes on panel **D**. Ensure that the orientation is as shown in **Det. 5**. Using **Screw 3.5 X 16mm**, secure the legs onto panel **D**.

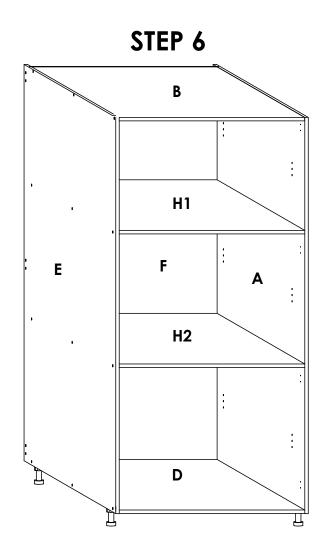

Flip the cabinet upright down as shown and confirm that the legs are secured firmly.




**STEP 7** 

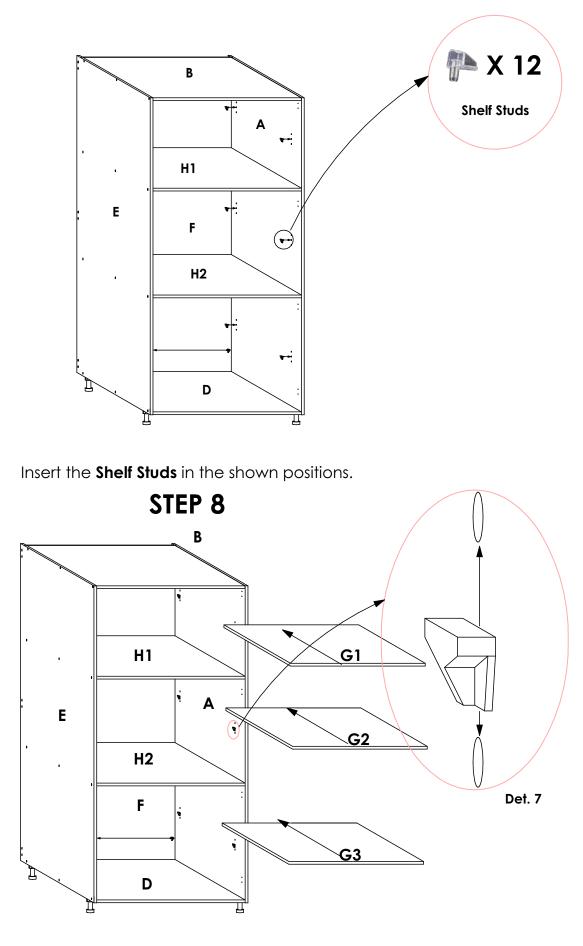


Slide in panels **G1**, **G2** & **G3** as shown, such that it sits on the four shelf studs. The level of the shelf is adjustable by shifting the position of the shelf studs as shown in **Det. 7**. See **Door Installation Guide** for further instructions.



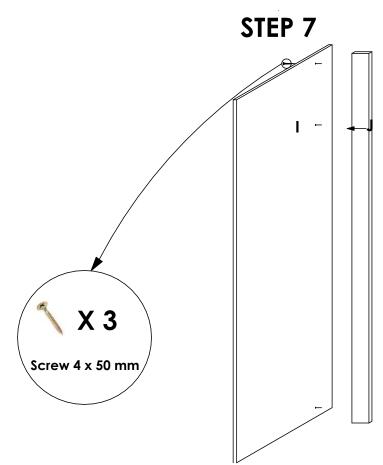

Connect panel J to panel I using Screw 4.0 X 50mm in the pre-drilled pilot holes as shown.

**STEP 8** 

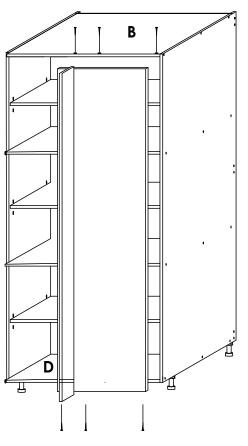

Connect panel I to panels B and D using Screw 4.0 X 50mm in the pre-drilled pilot holes as shown.







# SWING TRAY LEFT OPENING ASSEMBLY GUIDE




## HARDWARE

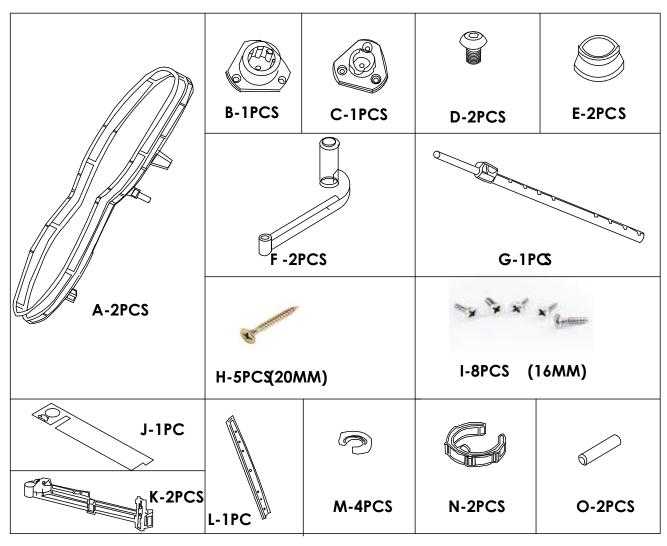


STEP 3: Installation of straight swing rod.

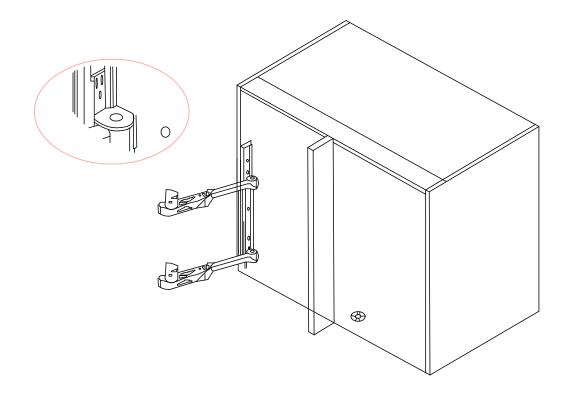


## STEP 4: Installation of curved swing rod.

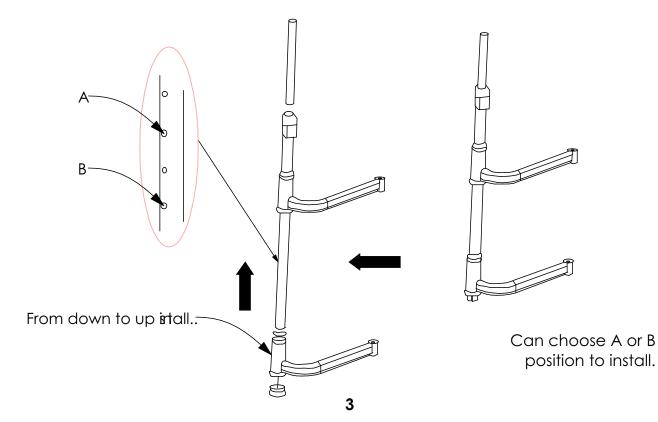


### STEP 5: Tube installation.

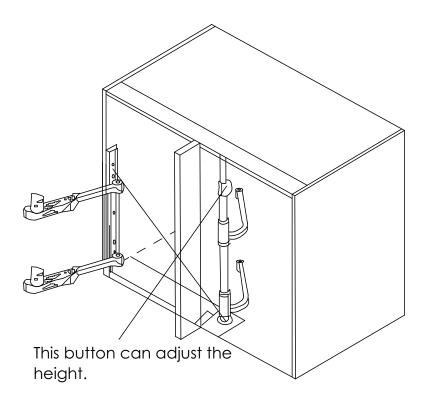

### **STEP 6: Basket Installation**

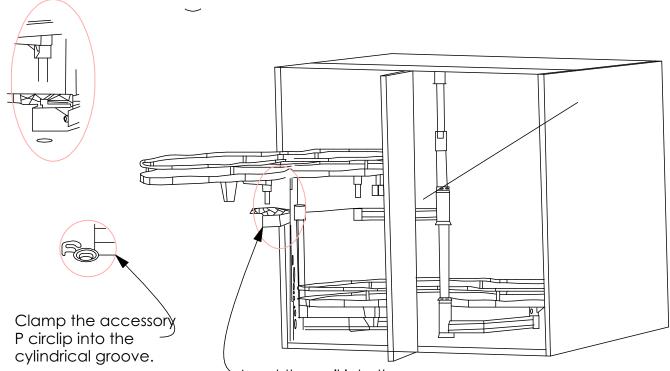


-Insert the nail into the grave.

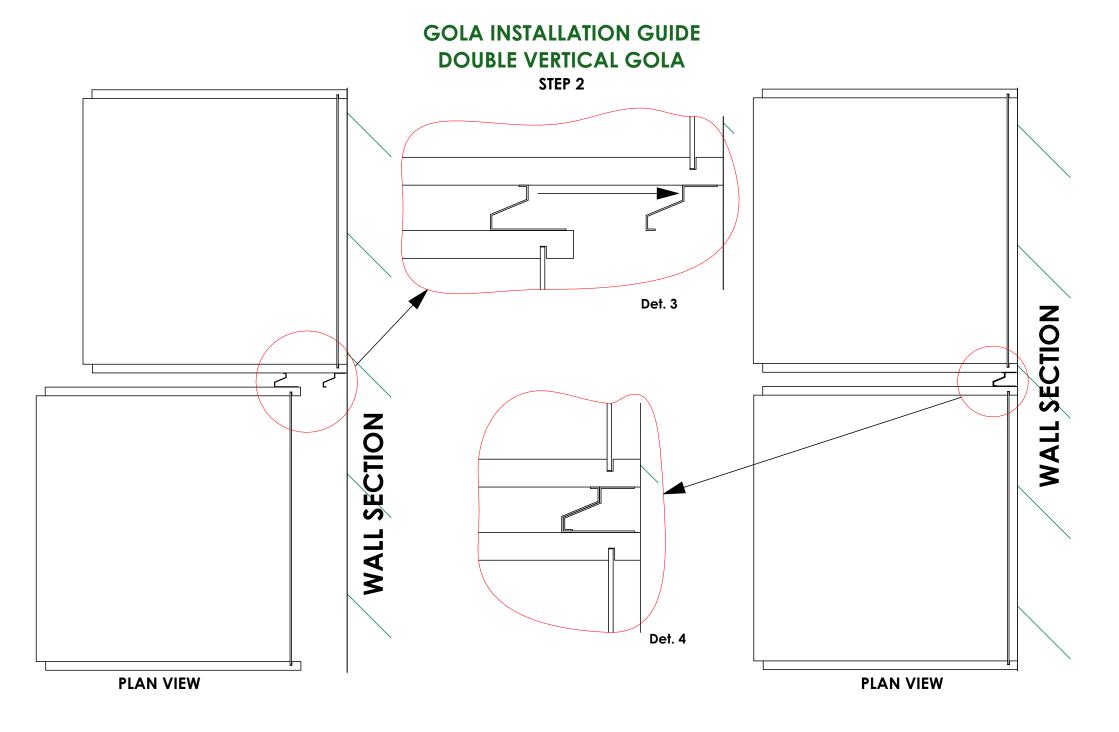

Connect the adjoining cabinets such that the steel brackets interlock. See Det. 3 & Det. 4.



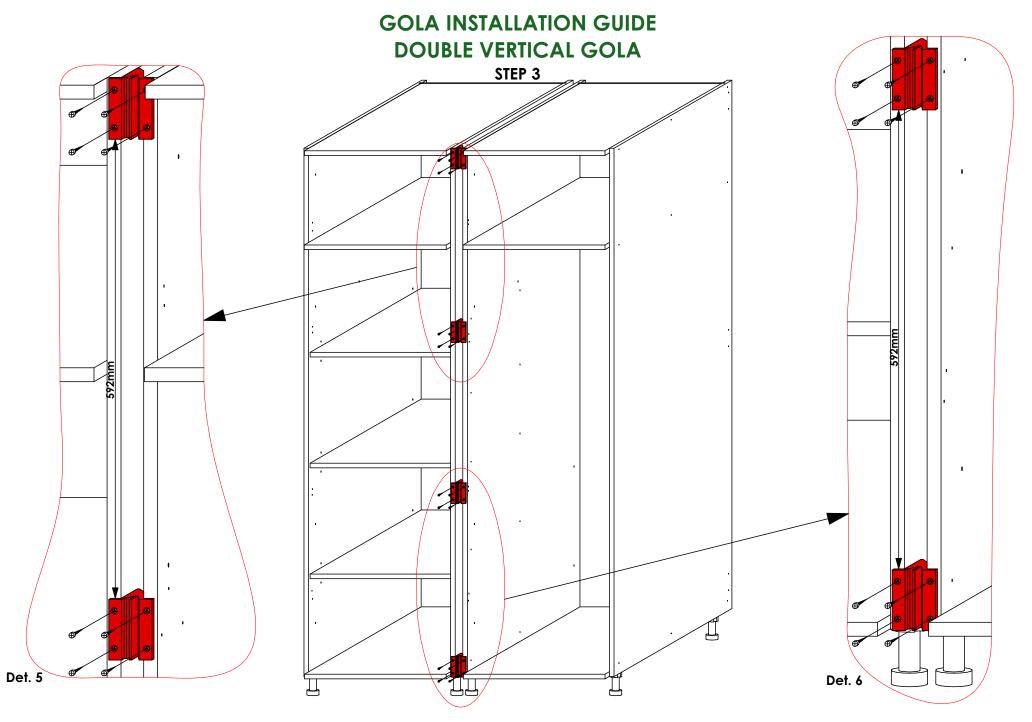


With the steel brackets interlocked, connect the **Double Vertical Gola Snap-on brackets** in the shown positions using the provided screws. See **Det. 5 & Det. 6** for measurements.




**GOLA INSTALLATION GUIDE DOUBLE VERTICAL GOLA** 

STEP 4

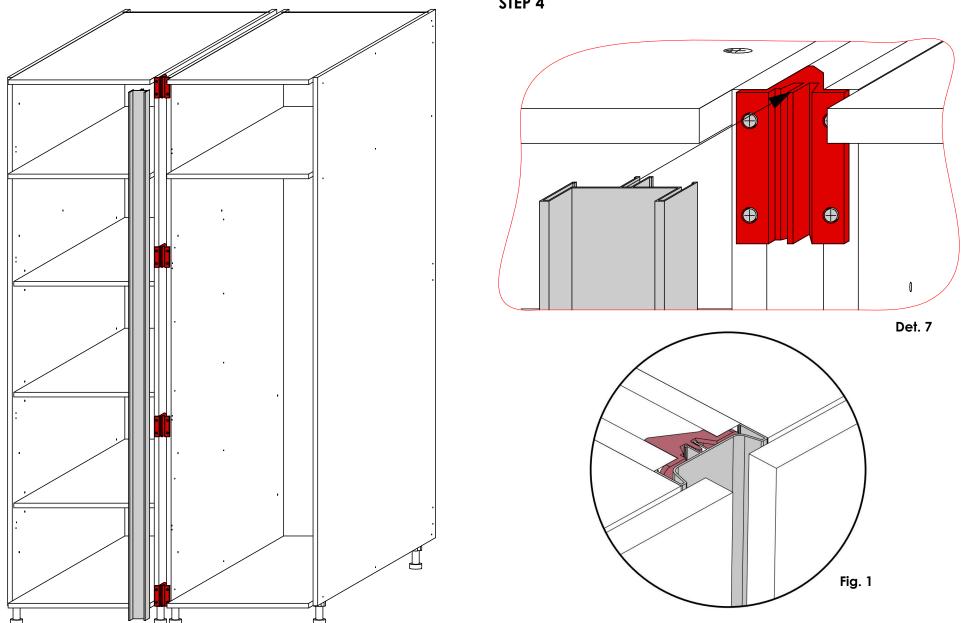




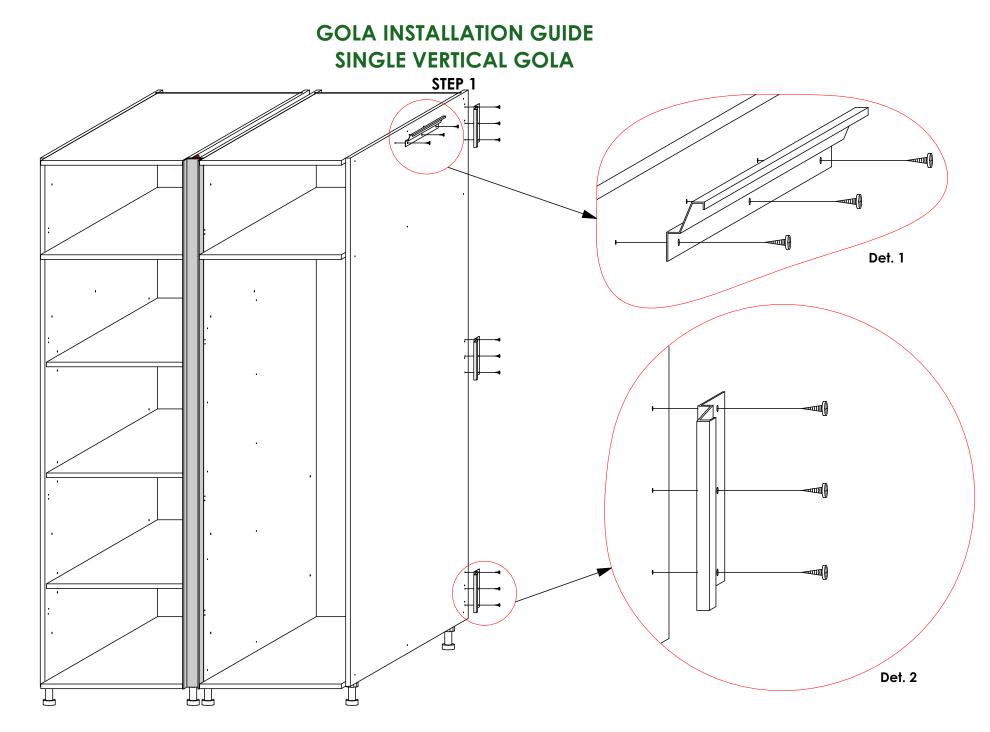


For an end panel connecting to a Tall Cabinet, connect the provided steel brackets in the shown positions using the provided screws. Use the pre-drilled pilot holes as a guide. See **Det. 1 & Det. 2**.




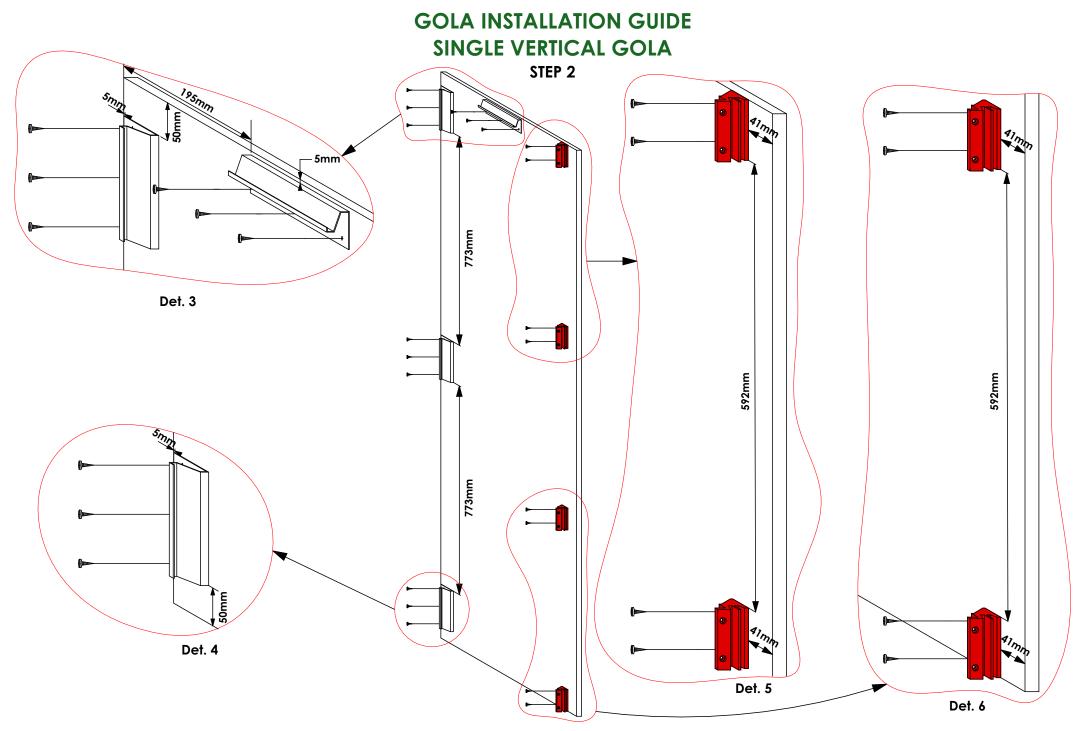


On the end panel, connect the provided steel brackets and Single Vertical Gola Snap-on brackets in the shown positions using the provided screws. See Det. 3 - Det. 6 for measurements.



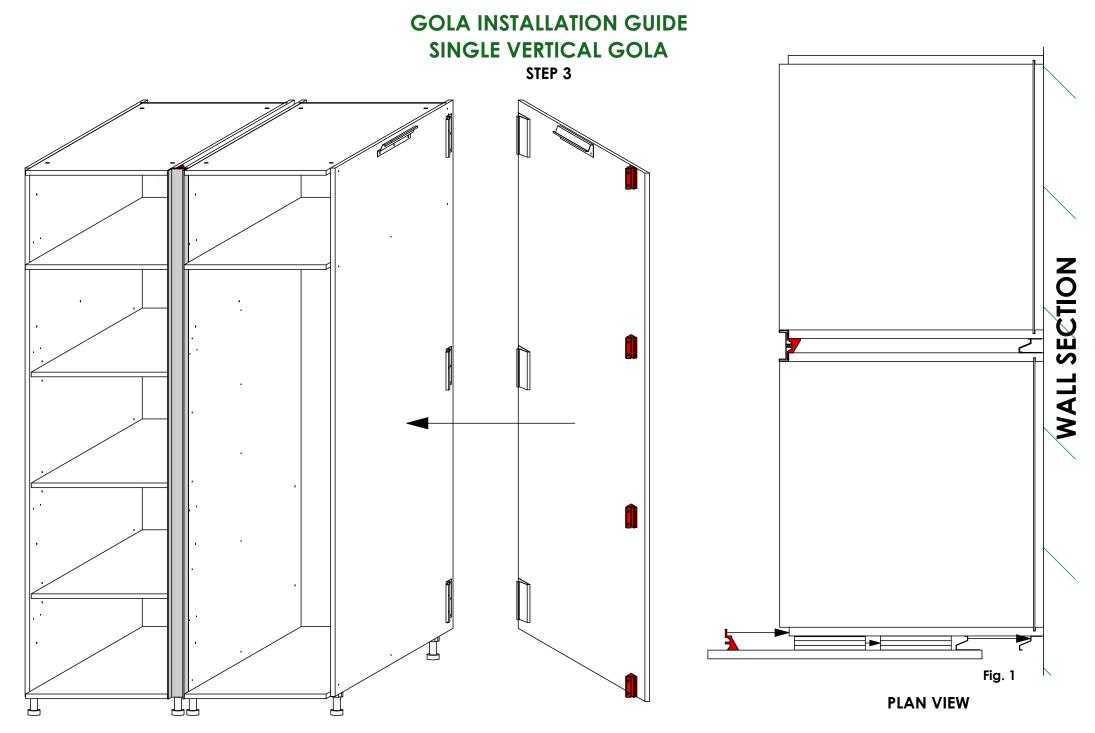





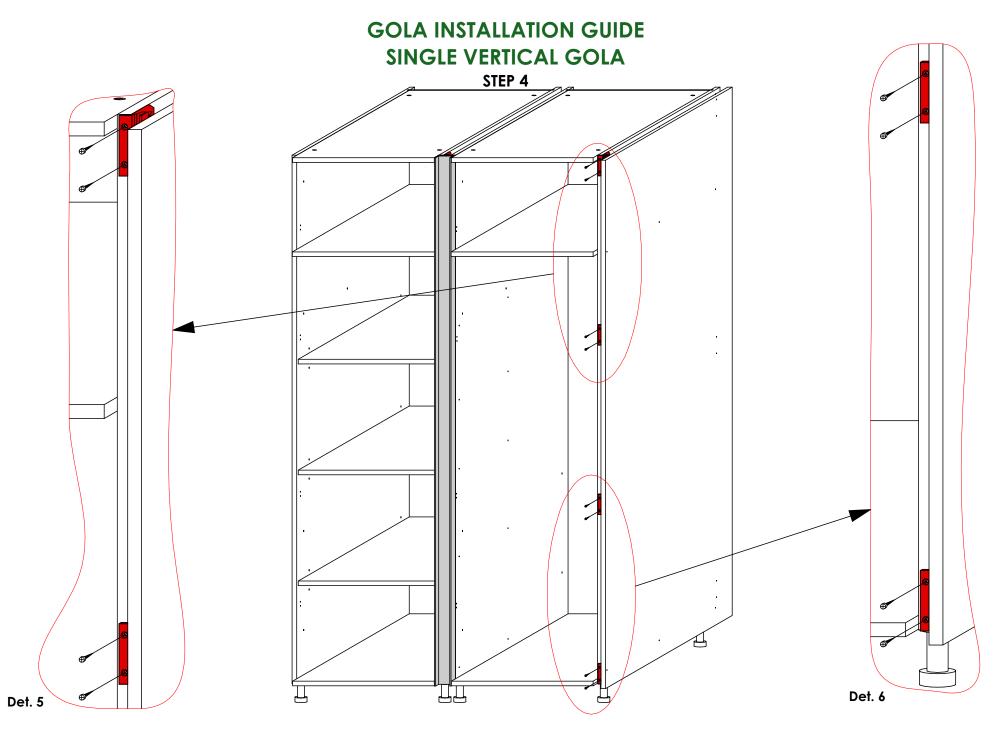

With the steel brackets interlocked and the Single Vertical Gola Snap-on brackets in position, add the provided screws for the Single Vertical Gola Snap-on brackets in the shown positions. See Det. 5 & Det. 6.



